

STERLING®


A KOHLER COMPANY

ACCORD®

Features

- Compression molded from our exclusive solid Vikrell® material
- Modular 4-piece design
- Pivot "snap together" installation
- Durable high-gloss finish
- Wall surround available with smooth finish or glazed tile appearance
- 10-year consumer/3-year commercial limited warranty
- Caulkless seam installation
- 15" (381 mm) bath depth (floor to top of threshold)
- 60-1/4" (1530 mm) x 31-1/4" (794 mm) x 73-1/4" (1861 mm) complete unit rough-in dimensions include flanges
- 60" (1524 mm) x 30" (762 mm) x 72" (1829 mm) complete unit finished dimensions

60" (1524 mm) BATH AND WALL SURROUND
71140110
ALSO 71140120, 71240110, 71240120

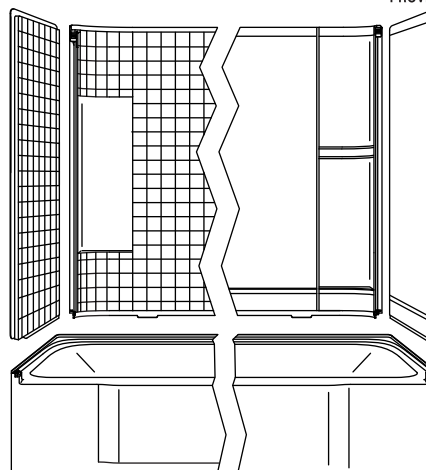

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71140110	60" (1524 mm) bath and wall surround, tile wall, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71140120	60" (1524 mm) bath and wall surround, tile wall, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71240110	60" (1524 mm) bath and wall surround, smooth wall, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71240120	60" (1524 mm) bath and wall surround, smooth wall, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Model	ADA Adaptive Component Description	Colors/Finishes	
71140116	Complete unit with age in place backers, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71140126	Complete unit with age in place backers, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71240116	Complete unit with age in place backers, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
71240126	Complete unit with age in place backers, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Technical Information

Fixture*:	
Basin area:	
Bathing well	46-1/4" (1175 mm) x 20-1/2" (521 mm)
Top area	52-1/4" (1327 mm) x 22-1/2" (572 mm)
To overflow:	
Water depth	11" (279 mm)
Capacity	34 gal (128.7 L)
* Approximate measurements for comparison only.	

Model	door maximum width	door maximum height
71140110	56-3/4" (1441 mm)	56-1/2" (1435 mm)
71140120		
71240110		
71240120		

Installation Notes

Install this product according to the installation guide.


Product is designed to be used with a single-handle mixer valve with an escutcheon cover not to exceed 7-3/4" (197 mm) in width.

Size the drain cutout to fit the drain assembly that will be used.

Studs should be positioned roughly as shown.

Bath cannot be installed without the wall surround.

Width of back wall at the top transitions from 60" (1524 mm) at the front to 59-3/8" (1508 mm) in the back corners. Furring strips approximately 1/4" (6 mm) thick should be used at the back corner studs if drywall is to be installed over the nailing flange.

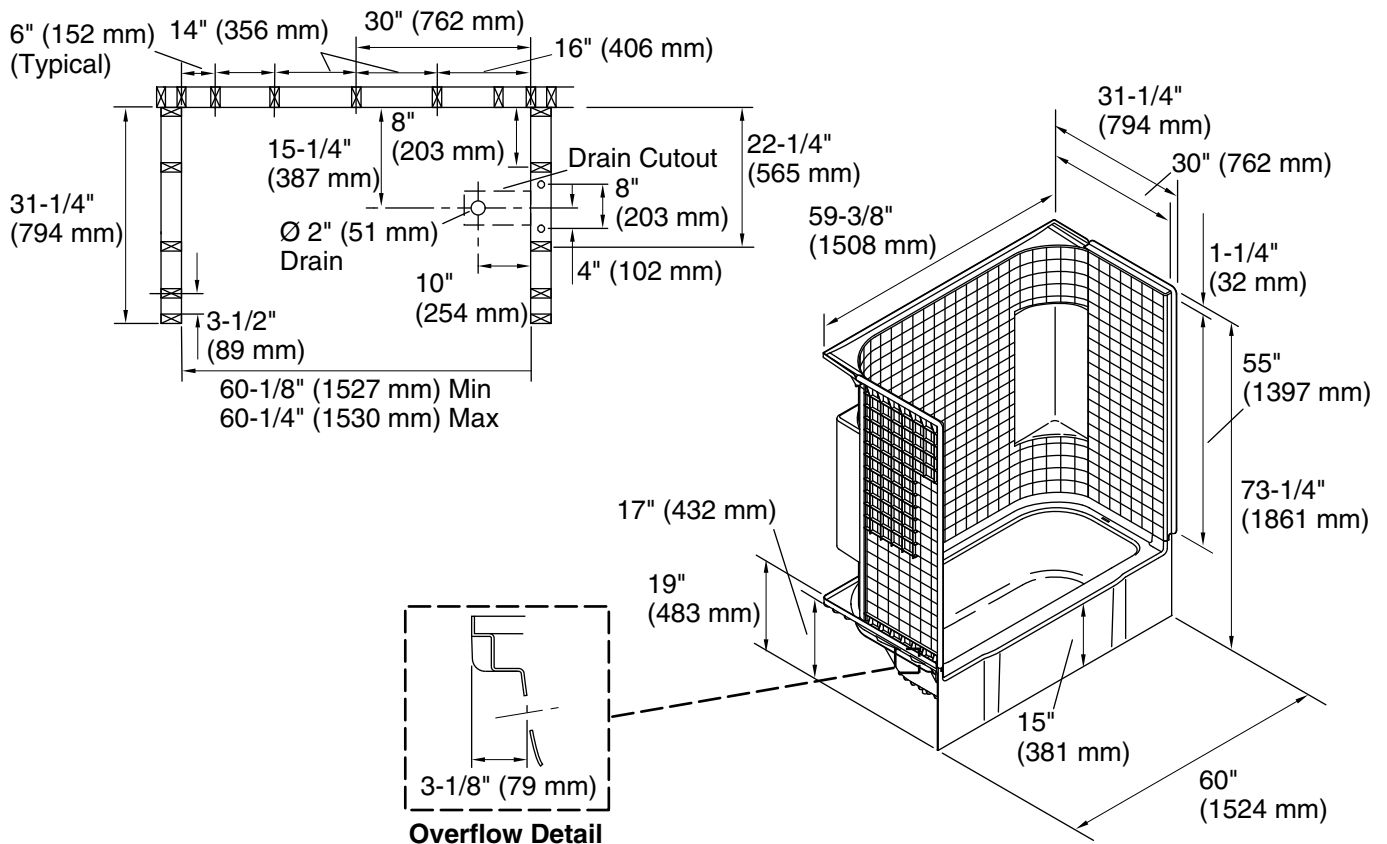

Product Diagram