


TWO HANDLE WASHERLESS KITCHEN FAUCET


For easy installation of your you will need:

To READ ALL the instructions completely before beginning.

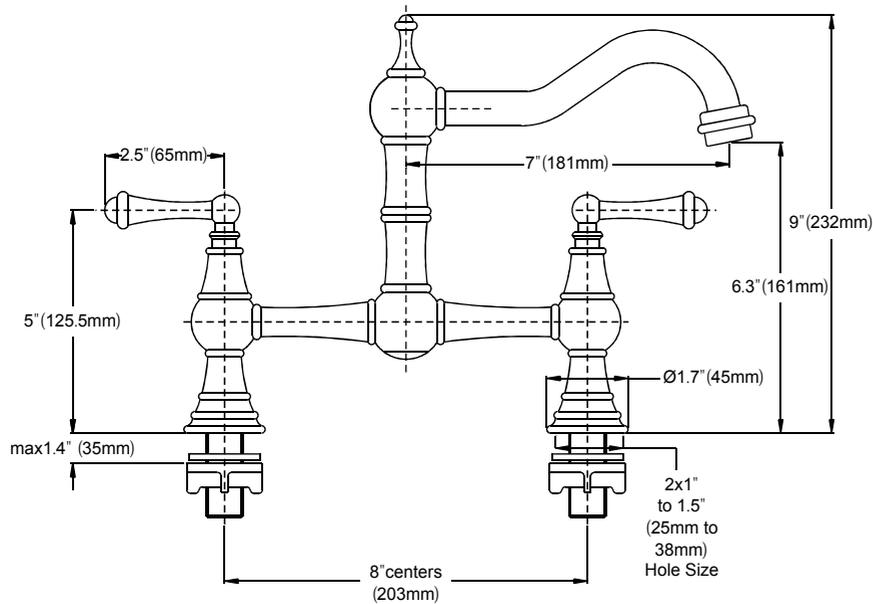

OPERATION


- Lever style handles
- Maximum handle(s) rotation angle is 90° to full on
- Rotate hot side counterclockwise to open (clockwise to close)
- Rotate cold side clockwise to open (counterclockwise to close)

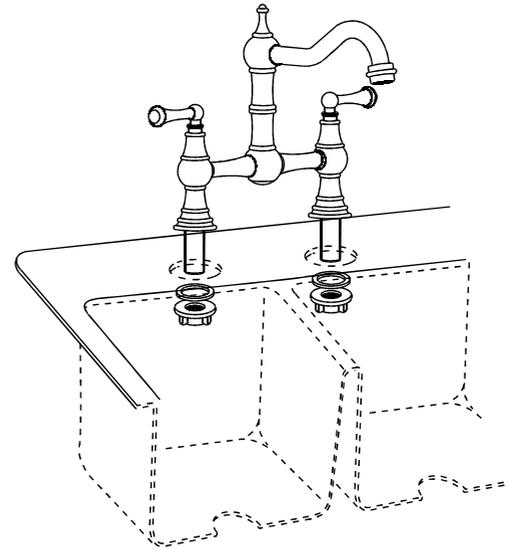

1

SHUT OFF WATER SUPPLIES.
Remove old faucet. Place faucet through mounting holes in sink

Option: If sink is uneven, use silicone under the escutcheon. Secure faucet to sink using locknuts provided.

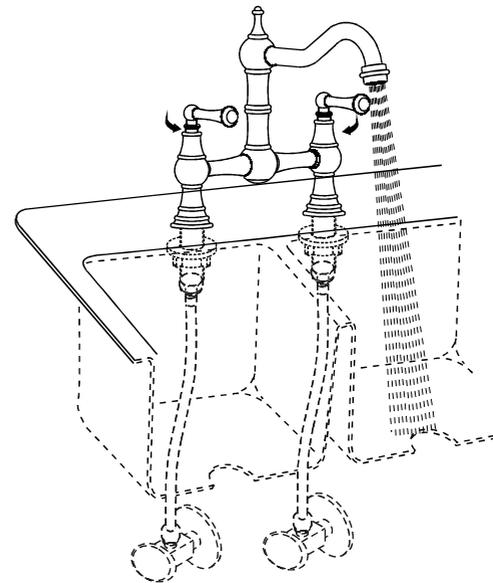

2

CONNECT TO WATER SUPPLIES

(not included).

Do not overtighten.

FLUSH SYSTEM/CHECK FOR LEAKS.
Remove and clean aerator, turn faucet handles all the way on. Turn on hot and cold water supplies and flush water lines for one minute.

Important: This flushes away any debris that could cause damage to internal parts. Check all connections at arrows for leaks. Replace aerator