



4' LED Grow Tube


22W | 120-277VAC | Ordering 65401161 | Part GL-22-MV

- > Accelerate plant growth for higher yields
- > Full spectrum white
- 5000K white spectrum
- 660nm red spectrum



SPECIFICATIONS

Ordering	65401161
Part	GL-22-MV
Certification	65401161
Description	4' LED Grow Tube
Input Voltage (VAC)	120-277V
Wattage	22W
Average Rated Life ¹	50,000 hours
Typical PPF	46 $\mu\text{mol/s}$
Location Rating	UL Damp Location
Beam Angle	≥ 100
Operating Temperature	Min -13°F (-25°C), Max 113°F (45°C)
Power Factor	>0.9
Operating Frequency (Hz)	60Hz
Spectrum	Full Spectrum

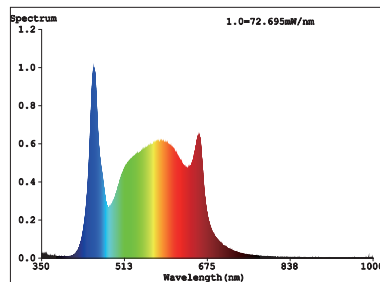

Brought to you by:



TO ORDER:

www.ETiSSL.com

Call: 1.855.ETi.SSLI

1.855.384.7754





4' LED Grow Tube

22W | 120-277VAC | Ordering 65401161 | Part GL-22-MV

SHIPPING INFORMATION

Ordering	65401161
Part	GL-22-MV
Certification	65401161
UPC	849489064499
Product Dimensions (L x W x H in.)	47.24 x 20.71 x 2.68
Product Dimensions (L x W x H cm.)	120 x 52.6 x 6.8
Product Weight (lbs.)	0.5lbs
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	25pcs
Master Carton Bar Code	50849489064494
Master Carton Dimensions (L x W x H in.)	49.61 x 7.87 x 7.87
Master Carton Dimensions (L x W x H cm.)	126 x 20 x 20
Master Carton Weight (lbs)	N/A
Pallet Quantity	N/A



Brought to you by:



TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

ETi Solid State Lighting, Inc.
720 Northgate Parkway
Wheeling, IL 60090
Phone: 855.384.7754
Fax: 847.383.6256