

### Features


- Handshower features contemporary design.
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- Thumb tab allows for a smooth transition between sprays.
- Spray nozzles cover full area of sprayhead.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean™ sprayface is easy to clean.
- 2.0 gpm (gallons per minute) flow rate.
- 24-inch slidebar features adjustable mounting brackets for installation flexibility.
- Includes 60-inch ribbon hose.

### Material

- LER finishes resist corrosion and tarnishing.

### Water Conservation & Rebates

- WaterSense®-labeled 2.0-gpm handshowers use up to 20 percent less water than standard 2.5-gpm handshowers, while still meeting strict performance guidelines.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

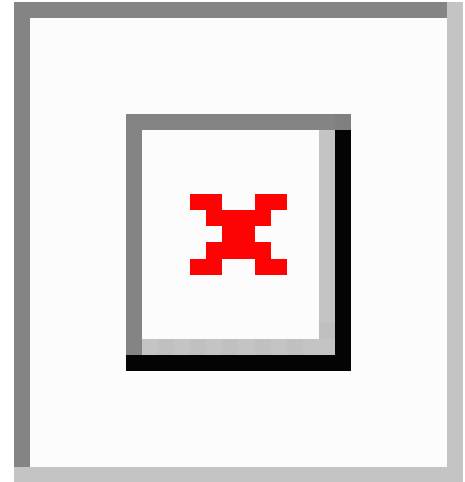

For complete listing of available colors, go to [kohler.com](http://kohler.com).



### Codes/Standards


ASME A112.18.1/CSA B125.1  
EPA WaterSense®

### Kohler Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Product Specification

The slidebar kit shall be 24" (610 mm) in height offering a custom shower at various heights. Kit shall feature adjustable mounting brackets providing installation flexibility. Kit shall feature a finish engineered to resist corrosion and daily wear. Kit shall feature lightweight handshower designed for easy use and added mobility. Kit shall feature 3-function handshower with wide coverage, intense drenching, and targeted spray options. Handshower offers 2.0 gal/min (7.6 l/min) maximum flow rate. Kit shall feature MasterClean spray nozzles to prohibit mineral build-up for easy cleaning. Kit shall have superior quality 1/2" brass hose fittings built to last. Slidebar kit shall be Kohler Model K-98361.

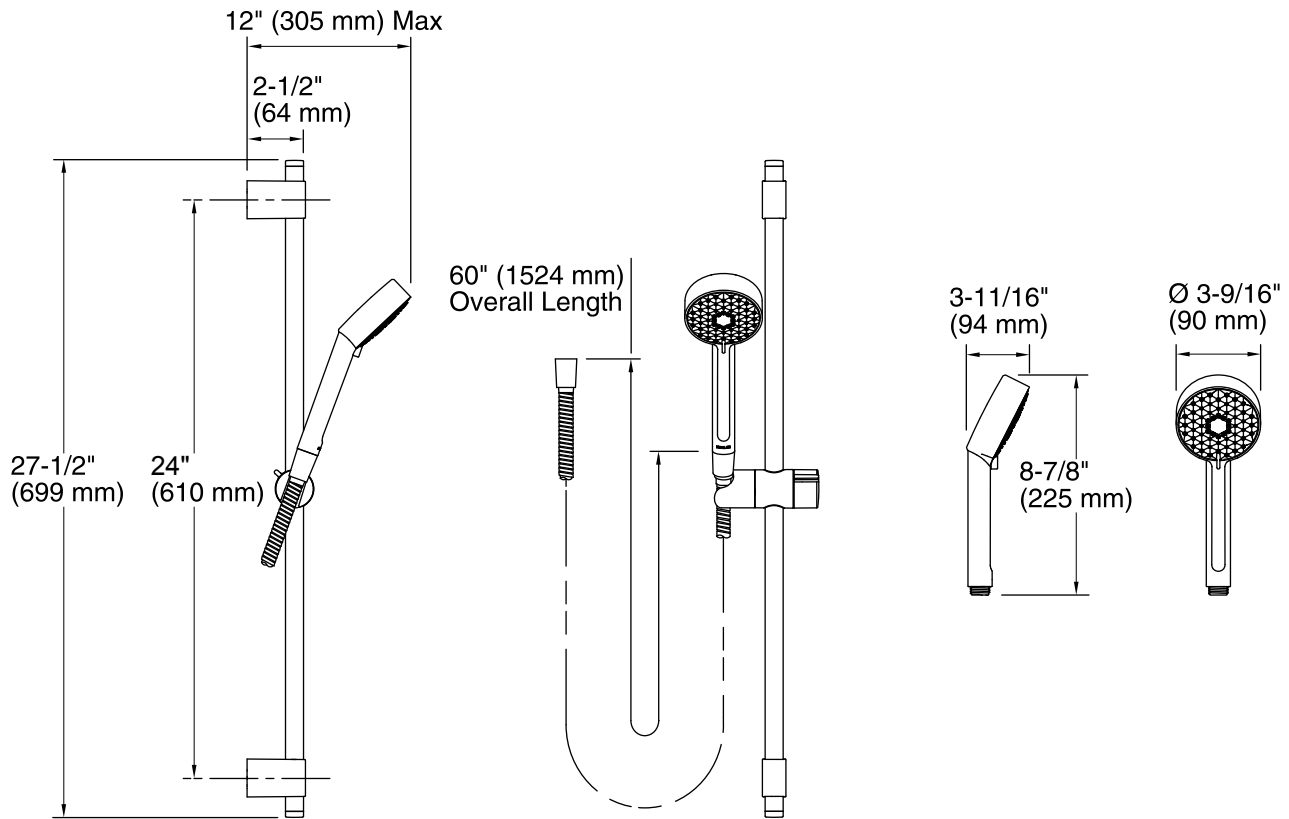

### Technical Information

All measurements are nominal.

Pressure: 45 psi (3.1 bar)

### Installation Notes

Install this product according to the installation guide.

Mount the slidebar to stud framing or install backing support. For tile or other solid finish surfaces: Predrill mounting holes through surface material only; do not drill into the stud. For drywall surface: No predrill is required.

NOTE: The mounting brackets can be adjusted to align with existing holes for retrofit installations.