



Cooktops

Radiant Cooktops

QUICK INSTALL & CLEARANCES

LSCE305ST - 30 inch

LSCE365ST - 36 inch

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

30 INCH DIMENSIONS (LSCE305ST)

A: Product Width	30-27/32"
B: Product Depth	21-1/2"
C: Product Height	4"
D: Cut-Out Width	29-3/8"
E: Cut-Out Depth	20-1/4"
F: Cut-Out Height	5-23/32"
Net Weight	34.2 lbs.

30 INCH POWER SOURCE (LSCE305ST)

Electrical Requirements	240V/208V, 60Hz AC
Max. Amp Load	40 Amp
Power Cable Location	Right Rear
Total Connected Load	7.7kW @ 240V, 5.8kW @ 208V

36 INCH DIMENSIONS (LSCE365ST)


A: Product Width	36-11/16"
B: Product Depth	22"
C: Product Height	4"
D: Cut-Out Width	34-9/16"
E: Cut-Out Depth	20-3/8"
F: Cut-Out Height	5-23/32"
Net Weight	43 lbs.

36 INCH POWER SOURCE (LSCE365ST)

Electrical Requirements	240V/208V, 60Hz AC
Max. Amp Load	50 Amp
Power Cable Location	Right Rear
Total Connected Load	10.5kW @ 240V, 7.9kW @ 208V

IMPORTANT INSTALLATION INFORMATION

- All electric cooktops run off a single phase, threewire or four-wire cable, 240/208 volt, 60 hertz, AC-only electrical supply with ground.
- Minimum distance between cooktop and overhead cabinetry is 30" (762 mm).
- Make sure the cabinets and wall coverings around the cooktop can withstand the temperatures (up to 93° C [200 °F]) generated by the cooktop.

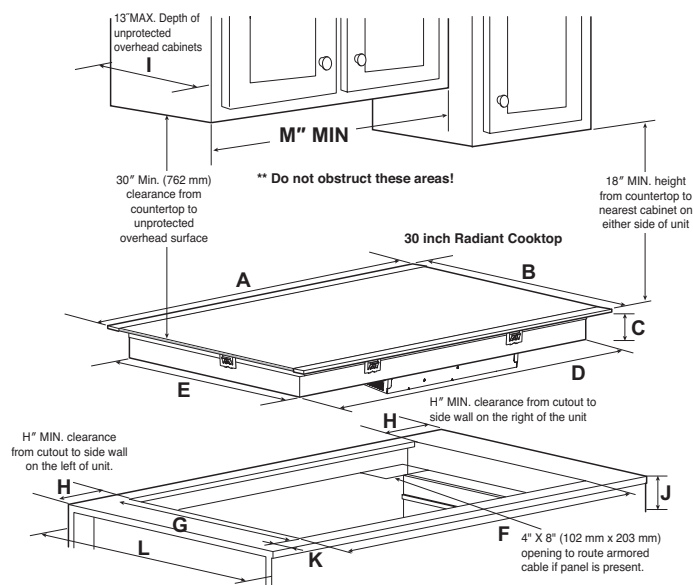

Model	A	B	C	D	E	F		G	H	I	J	K	L	M
						Min	Min							
30" Elec. Cooktop	30 13/16"	21 3/4"	3 3/4"	28 13/16"	19 5/8"	29 3/8"	20 1/4"	13 1/16"	13	5 11/16"	2 1/2"	24	30 13/16"	
36" Elec. Cooktop	36 11/16"	22 1/2"	3 3/4"	33 7/8"	19 3/4"	34 9/16"	20 3/8"	13 1/16"	13	5 11/16"	2 1/2"	24	36 11/16"	

- All dimensions are stated in inches and millimeters (mm).
- Allow 2" (50 mm) space below the armored cable opening to clear the electric cable and allow space for installation of the junction box on the wall at the back of the cooktop.

