



FAST TRACK SCREENING SYSTEM INSTALLATION INSTRUCTIONS

TOOLS & SUPPLIES



Screen



Flat Spline



Rollerknife



Chop Saw



Drill



Rubber Mallet



1 Attach Fast Track Clips to Porch Frame

Mark clip positions around the frame keeping clips aligned for proper channel installation. Attach clips a maximum of 4" from corners and 14" - 16" apart using #10 x 1 1/2" screws.



2 Attach Fast Track Channel to Clips

Cut Fast Track channels to length and snap over clips using a rubber mallet, installing the vertical channels first followed by the horizontal channels.





3 Create Posts & Rails by Mating Channels

For vertical posts, simply stack two clips together in the desired location on both the top and bottom of the frame using #10 x 2" stainless steel screws and then snapping two channels together using a rubber mallet.


Install horizontal posts by using 3" length screws to attach clips to the porch frame and #8 x 4 1/2" screws to attach the rails to the vertical posts.

One of the unique features of Fast Track is that the 1"x2" channels snap together to form a 2"x2" post and rails.

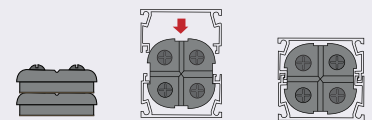

4 Roll Screen

Using flat spline, a Rollerknife Screening Tool & fiberglass screen, simply roll screen into the grooves located on either the interior or exterior of the porch. Starting with the top, working your way to the sides and bottom of each section to be screened.

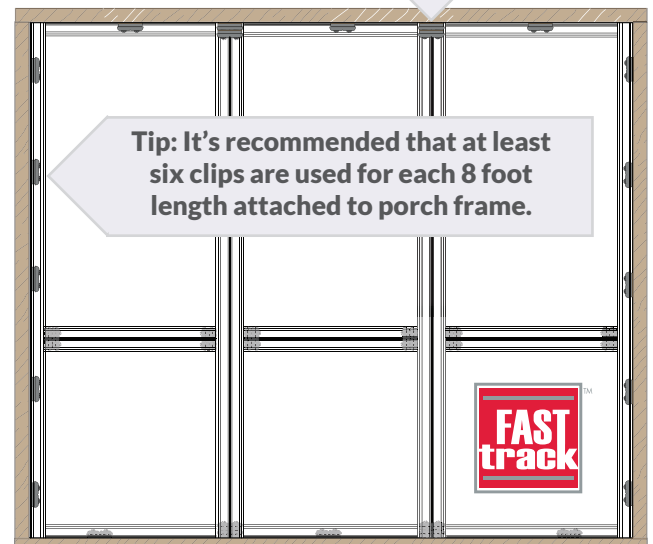

Tip: It's recommended that at least six clips are used for each 8 foot length attached to porch frame.

Access project support and resources at ScreenTight.com

