

# Go Galley Assembly Instructions

## Step 1: AS 1: Uncrate Go Galley



### AS 1 – A

- Cut Shipping Bands.
- Lift up on Crate and Remove Plastic around Unit



### AS 1 – B

- Unlatch Front Clasp.
- Carefully swing Right Hand Component open.
- Carefully remove all parts stored on this side of Unit.



### AS 1 – C

- Carefully open Left Hand Component PART WAY.
- Very carefully, remove Grill Hood and all remaining parts inside Unit.

NOTE: Take Notice of which Component Wing is the Smoker and which is the Boiler.

**Step 2: AS 2: Tilt Unit on Back.**

**CAUTION:** Unit weighs over 300 pounds. DO NOT ATTEMPT ALONE.




**AS 2 – A**

- Close Components and Re-latch Front Clasp.
- Slide Unit to edge of Shipping pallet.
- Being careful to keep Unit on pallet, turn Unit up on it's Back as shown.



**AS 2 – B**

- Install Wheels.
- NOTE:** Be sure to install (2) Fixed Casters under base of Grill.

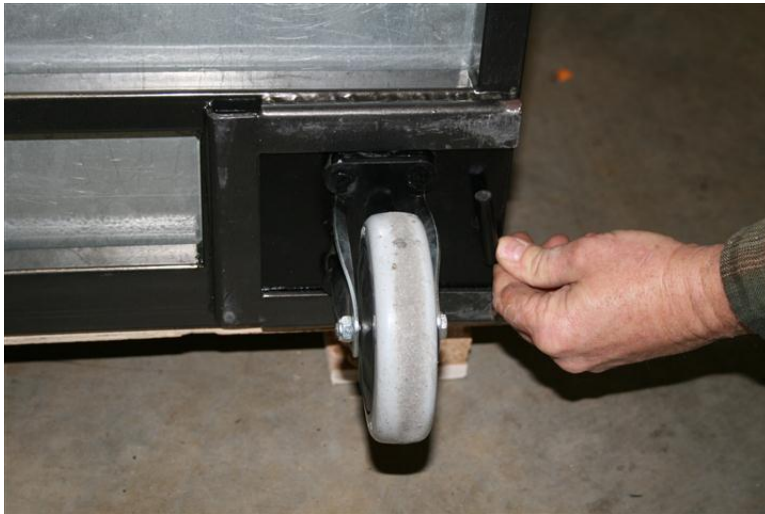

#### AS 2 –C

- Install (2) Swivel Casters under Wing Components (Boiler Wing and Smoker Wing).

NOTE: Be sure all Casters are fully seated into Caster receivers.



#### AS 2 –C

- All wheels are now installed

#### Step 3: AS 3: Return Unit to Upright Position.

**CAUTION:** Unit weighs over 300 pounds. DO NOT ATTEMPT ALONE.

➔ Also Remember – You are Now Setting Unit on Wheels. It Will Have a Tendency to Roll!



#### AS 3 – A

- Slide Unit to edge of pallet with wheels hanging over.
- VERY Carefully tilt forward and allow wheels to make controlled contact with ground.





#### AS 3 – B

- Slowly transition weight from pallet to wheels while keeping balance under complete control.

### Step 4: AS 4: Install Lift Mechanism



#### AS 4 – A

- Press Down on Winch Power Switch.



#### AS 4 – B

- When you hear the Winch releasing cable, manually pull the Cable Loop from the rear of Unit until some 18 inches of cable is extended.



#### AS 4 – C

- See Pictured Lift Assembly.



#### AS 4 – D

- Attach Lift Assembly to back of Unit using (4) 3/8 by 4 inch Allen Head Cap Screws. (Use Allen wrench included)

NOTE: Be Sure to Tighten with Full Hand Pressure on the Provided Allen Wrench.



#### AS 4 – E

- Picture Shows Allen Head Cap Screw Being Tightened.

NOTE: Check Cap Screw Torque Prior to Every Transport.





AS 4 – F


Note: Lift Assembly should swing up and down freely,

### Step 5: AS 5: Install Hitch Tongue



AS 5 – A

- Remove Rear Hitch Pin for Rear Lift Arm.
- Hold Hitch Tongue so Pin can be inserted through Rear Solid Hole. (Holding Front Lift Arm Up and clear is helpful.)

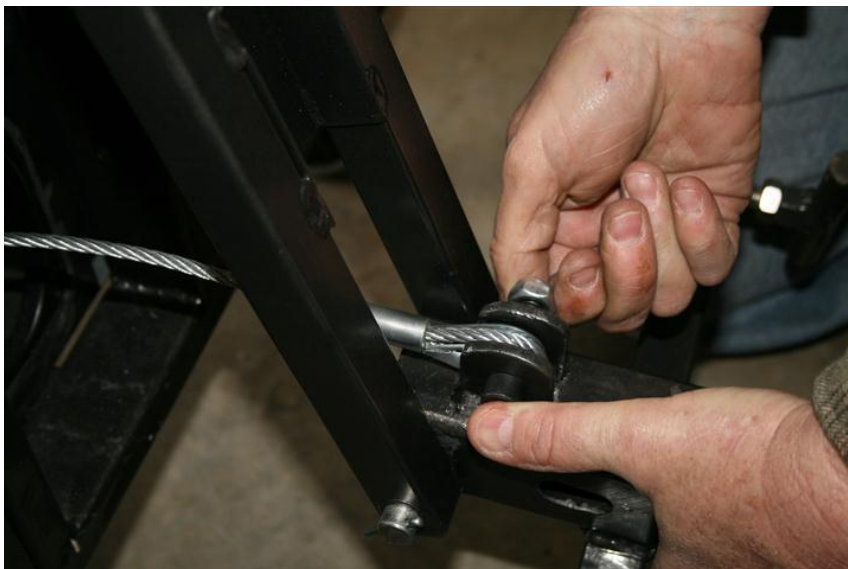

AS 5 – B

- Install Winch Cable Eye into welded clevis on Hitch Tongue using 3/8 Pin and Cotter Key.



#### AS 5 – C


- Remove Front Wrist Pin from Front Lift Arm.
- Hold Hitch Tongue so Pin can be inserted through Front Slotted Hole in Hitch Tongue.



#### AS 5 D

- Picture of Complete Hitch

### Step 6: AS 6: Install Grill Heat Diffusers

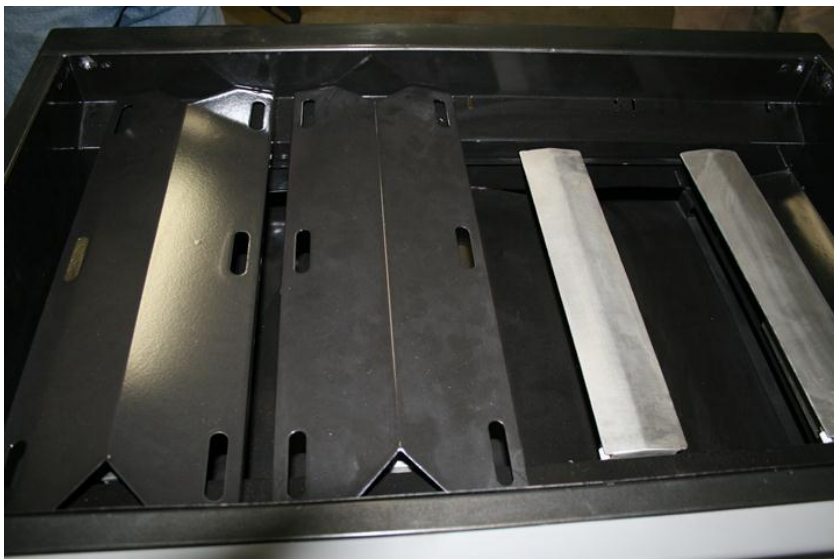

#### AS 6 – A

- Install Grill Heat Diffusers by inserting tabs into slots inside Grill Cavity





#### AS 6 – B

- Install Grill Heat Diffusers by inserting tabs into slots inside Grill Cavity

### Step 7: AS 7: Install Grill Windscreens



#### AS 7 – A

- Install Rear Grill Wind Screen upright into Unit, using self-tapping screws provided



#### AS 7 – B

- Install Right Hand Grill Wind Screen in upright position using self-tapping screws





#### AS 7 – C

- Install Left Hand Grill Windscreen in upright position using self-tapping screws

NOTE: Fasten the corners of Side Windscreens to Rear Windscreen with Machine Screws.



#### AS 7 –D

- Install Front Grill Cook Grid Channel to Unit with self-tapping screws

### Step 8: AS 8: Grill Hood



#### AS 8 – A

- Install Grill Hood Handle onto Grill Hood with ¼ Machine Screws



**AS 8 – B**

- Install Grill Hood Handle onto Grill Hood with ¼ Machine Screws



**AS 8 – C**

- Install Grill Hood onto Left Hand and Right Hand Grill Windscreens with Shouldered Screws.

**Step 9: AS 9: Grill Items**



#### AS 9 – A

- Install Warmer Rack by fitting turndown probes into predrilled holes in windscreens



#### AS 9 – B

- Install Grill Cook Grids by sliding into Front Grill Cook Grid Channel

### Step 10 AS 10: Grill Drip Pan



#### AS 10 – A

- Slide Grill Drip Pan directly under Burners and into channels on either end of Grill and attach with the two screws provided.
- Slide Collection Box into tracks under Drip Pan.



## Step 11: AS 11: Doors under Grill



### AS 11 – A

- Install both Right-Hand and Left-Hand doors by aligning hinge pins and sliding hinge down over pin.
- NOTE: Before Attaching – Be sure Gas Hose cut out is located in lower inside corner and that Door opens Outward.





AS 11 – C

- Finished Door Assembly



AS 11 – D

- Attach Nylon LP Tank Strap to LP Tank at This Point

Step 12: **AS 12: Smoker Inserts**



AS 12 – A  
View of Smoker Chip Tray Rack  
(Pre- Assembled)



As 12 – B

- Place Smoker Chip Tray into Rack and set Chip Tray Top on Tray



AS 12 – C

- Slide Smoker Steam Water Pan in lowest Smoker Wall Bracket Slide.
- Slide (4) Smoker Cooking Racks into Smoker Wall Brackets