




USE AND CARE GUIDE

FLUSH VALVE

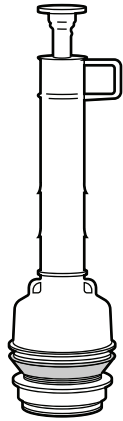

THANK YOU

We appreciate the trust and confidence you have placed in Everbilt through the purchase of this flush valve. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Everbilt!

Warranty

WHAT IS COVERED

The manufacturer provides a guarantee for one year following purchase of the product. The guarantee is limited to product defects that arise through normal product usage and are the result of manufacturing error or faulty material. Under these circumstances, the manufacturer will provide a replacement product at no charge. The customer will be responsible for sending the product to manufacturer, providing evidence of purchase date and reinstalling the replacement product. The guarantee will be void if the product has not been installed or maintained properly or if the product has been exposed to in-tank toilet bowl chemicals.

Contact the Customer Service Team at 1-800-305-1726 or visit www.HomeDepot.com.



Questions, problems, missing parts? Before returning to the store, call Everbilt Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-800-305-1726

HOMEDEPOT.COM


Safety Information

- For your safety and to ensure the best use of the accessories, make sure to follow the instructions in this document.

WARNING: In-tank toilet bowl cleaners are not to be used with this product. Use of cleaning products containing chlorine or bleach pose the risk of damaging toilet components and can lead to excessive water loss.

Pre-Installation


TOOLS REQUIRED



Towel Sponge

NOTE: Hardware not shown to actual size.

PACKAGE CONTENTS

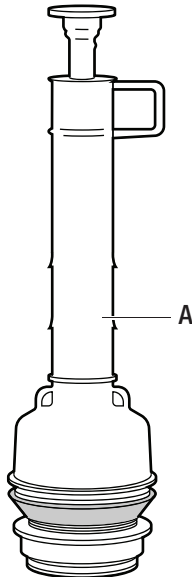


Part	Description	Qty.
A	Flush Valve	1

Installation



1 Turning off the water supply

- Shut off the water supply to the toilet.
- Completely drain the tank.

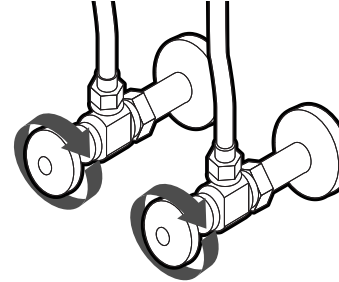

2 Removing the old flush valve

- Disconnect the water supply line (1) from the ballcock shank (2) beneath the tank.
- Disconnect the tank from the bowl.
- Remove the old flush valve from the tank.

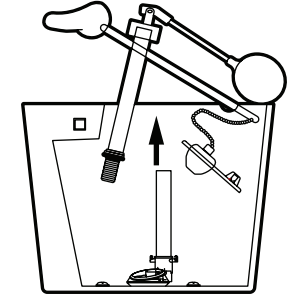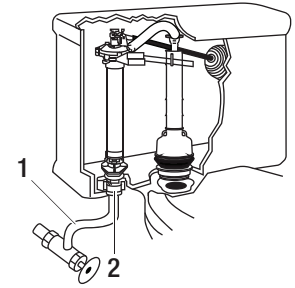

3 Installing the new flush valve

- Install the shank gasket (1) and insert the new flush valve (A).
- Attach the shank nut (2).
- Install the tank-to-bowl gasket and place the tank on the bowl.
- Reconnect the washers and nuts that attach the tank to the bowl.
- Reconnect the refill tube (3) and tank lever (4) to the flush valve (A).
- Test flush and check connections.
- Adjust the water level if necessary.

