KROSSWOOD DOORS®

Your Perfect Door Delivered

Krosswood Doors

A little maintenance goes a long way, so we've created this guide to help ensure the long life and beautiful appearance of your door.

Caring for your door

Wood doors benefit from a thorough cleaning 2-3 times a year. Avoid using abrasive cleaning products or tools as these can damage the finish of the door. Lint free, microfiber cloths are ideal. For doors with glass, use household glass cleaner or a vinegar and water solution on the glass panels. Wipe with a lint-free cloth or coffee filters for a streak-free finish.


Don't use a power washer or garden hose to clean your door, and don't let sprinklers run on it. This can cause water to enter your home through the seams and dull your door's finish.

Fortunately, the wood construction of most of our doors offers the ability to touch-up or paint at any time. Refinish as needed or every 2-3 years.

Warranty

The Krosswood one year limited Warranty covers manufacturing defects in material or workmanship of the doors.

ANATOMY OF A DOOR

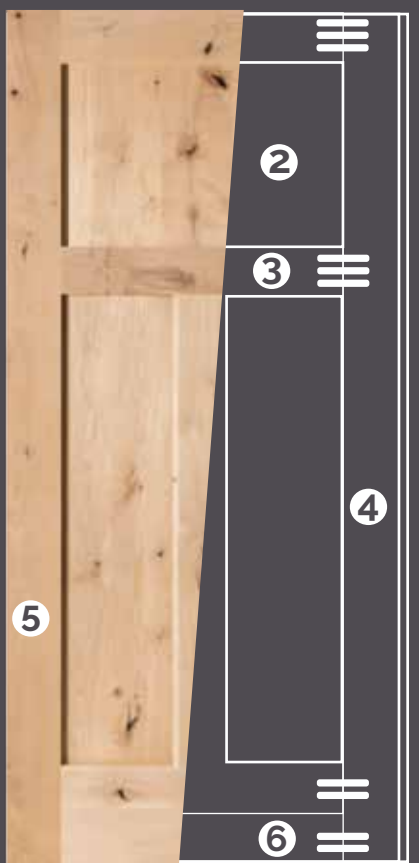

1. EDGE BANDING
2. SOLID WOOD PANEL
3. ENGINEERED STILES
4. ENGINEERED RAILS
5. SOLID WOOD VENEER (⅛")
6. DOWELS

ENGINEERED STILES AND RAILS

Engineered stiles and rails are sturdier and less susceptible to warping and bending.

DOWELED CONSTRUCTION

Dowels have been placed between the stiles and rails to strengthen the door. This prevents warping and sagging.

Overhang Requirements

A proper overhang is essential to prevent door damage from rain, snow, and sunlight. Direct exposure reduces lifespan, may require repairs, and voids the warranty.

Before...



After...



Ensure your door has a proper overhang for longevity. Overhang width (W) should equal overhang height (H), and overhang depth (D) should be at least half of the height (H).

W=H and D≥ (½)H

Stain Touch-up

Wood doors made to shrink and expand to accommodate varying humidity levels and climate changes. This can occasionally cause natural, unfinished wood to be exposed.

For pre-stained orders, we have included stain touch-up kits to keep your door looking beautiful for years to come!

To apply stain touch-ups:

1) Generously apply the stain to the affected areas
2) Wait 15 minutes
3) Wipe off with a dry rag
4) Repeat if necessary





