

PASS

SUBMITTER

Ningbo Jiangbei Fufu Electronic Commerce Co Ltd

Room 702, No.1, Huamao Headquarters, Southern Business District, Yinzhou District, Ningbo, Zhejiang, China



WAYFAIR SKU

HS020572

**SUPPLIER
PART ID**

HS020572

**PRODUCT
DESCRIPTION**

Wooden shelf

**EXECUTIVE
SUMMARY**

The submitted sample(s) MEET all the tested requirement(s).

REMARKS

/

**GENERAL
INFORMATION**

Dean Xu/ Cici Huang

(+86)755-86185268 / 86135570

E-mail:

Dean.xu@bureauveritas.com

Cici.huang@bureauveritas.com

SIGNATURES

BUREAU VERITAS SHENZHEN CO., LTD



Sure Fu

SENIOR TECHNICAL MANAGER
HARDLINES DIVISION





Test Report: (8526)077-0863

WAYFAIR LLC

Received Date: March 19, 2026

Report Date: March 26, 2026

VENDOR NAME	NINGBO JIANGBEI FUFU ELECTRONIC COMMERCE CO LTD
AGENT NAME	/
FACTORY NAME	/
SUPPLIER ID NUMBER	/
RELATED PROJECT NAME	/
PHASE	Testing
TEST TYPE	Pre-Shipment (Production)
REASON FOR TESTING	Wayfair SH/US Request
MANUFACTURER PART ID	HS020572
UPC CODE	/
PURCHASE ORDER NUMBER	/
COUNTRY OF DESTINATION	UNITED STATES
COLOR(S) SUBMITTED	textured
LOT NUMBER	/
LABELLED AGE GRADE	NOT PRESENT
APPROPRIATE AGE GRADE	N/A (Adult)
CLIENT SPECIFIED AGE GRADE	/
TESTED AGE GRADE	Adult
SUPPLIER REFERENCE NUMBER	/
COUNTRY OF ORIGIN	CHINA
SUBMITTED FIBER CONTENT	/
ACTUAL FIBER CONTENT	/
SUGGESTED FIBER CONTENT	/
SUBMITTED CARE INSTRUCTION(S)	/
CLIENT EXPECTED CARE INSTRUCTION	/
SUGGESTED CARE INSTRUCTION(S)	/



Test Report: (8526)077-0863

WAYFAIR LLC

Received Date: March 19, 2026

Report Date: March 26, 2026

PROTOCOL NUMBER	WAYF-HL-PTCL-03042-GBL-CABINETS-V17, CPSD-AN-PTCL-06572-USA-CALIFORNIA PROPOSITION 65-V148, WAYF-GB-PTCL-08444-USA-CPSIA REQUIREMENTS SUPPLEMENT-V3, WAYF-AN-PTCL-09062.02-GBL-1 STAR ONLY-TPCH SUPPLEMENTAL-V1, WAYF-HL-PTCL-09067-GBL-PACKAGING AND LABELING REQUIREMENTS-V2
PROTOCOL STAR LEVEL	/
FAIL RETEST	NO
PREVIOUS REPORT NUMBER	/
RETEST SAMPLE NUMBER	/
REPORT EXPIRATION DATE	/



Test Report: (8526)077-0863

WAYFAIR LLC

Received Date: March 19, 2026

Report Date: March 26, 2026

TEST RESULTS FOR Wooden shelf

TESTED PROPERTY	REQUIREMENTS	RESULTS	RATING
US Packaging labeling (16 CFR 500 / UPLR Handbook 130)			
	WAYF-HL-09067-GBL Packaging shall be labelled with the following, Product Identification Net quantity of contents shall be expressed in terms of weight or mass, measure, numerical count, or combination so as to give accurate information to facilitate consumer comparison (U.S. and metric units) Manufacturer, packer, or distributor's name & address (City, State & Zip Code)	Meet	PASS
Country of origin marking (19 CFR 134)			
	WAYF-HL-09067-GBL Shall indicate country of origin legibly, permanently, and in comparable size and close proximity to any mention of country other than country in which the article was manufactured or produced. Must be visible at point of purchase.	Meet	PASS
EPA TSCA title VI-Composite wood-Declaration form and mill cert. (40 CFR 770)			
	WAYF-HL-09067-GBL If wood of any type is present in the sample, submitter shall provide a completed and signed Sample Declaration Form.	Meet	PASS
EPA TSCA Title VI-Composite wood-Finished good labeling (40 CFR 770.45(c) & (e))			
	WAYF-HL-09067-GBL Finished goods containing regulated composite wood shall comply with the labeling requirements in 40 CFR 770.45(c) unless qualifies for the de minimis exception in 40 CFR 770.45(e).	Meet	PASS
CARB-Composite wood-Declaration form and mill cert. (Title 17, CCR §93120)			
	WAYF-HL-09067-GBL If wood of any type is present in the sample, submitter shall provide a completed and signed Sample Declaration Form.	Meet	PASS
CARB-Composite wood-Finished good labeling (Title 17, CCR §93120.7(d))			
	WAYF-HL-09067-GBL Finished goods containing regulated composite wood shall comply with the labeling requirements for fabricators found in §93120.7(d).	Meet	PASS

TEST RESULTS FOR Wooden shelf

TESTED PROPERTY	REQUIREMENTS	RESULTS	RATING
-----------------	--------------	---------	--------

Clothing storage units - Labeling (16 CFR 1261 / ASTM F2057-23)

	WAYF-HL-03042-GBL Shall comply with labeling requirements as specified in the standard. 16 CFR 1261 incorporated by reference to the ASTM F2057-23 with no modification.	Meet See result data	PASS
--	--	---------------------------------	------

Total lead in surface coating (16 CFR 1303 / Consumer Product Safety Improvement Act of 2008)

	WAYF-GB-08444-USA, WAYF-HL-03042-GBL Accessible surface coating(s) in the assembled state on adult furniture[Excl. factory applied coating on metal] & household paint(s) shall not exceed 90mg/kg of total Pb.	Meet See result data	PASS
--	--	---------------------------------	------

Clothing storage units - Physical & Mechanical (16 CFR 1261 / ASTM F2057-23)

	WAYF-HL-03042-GBL Shall comply with physical and mechanical requirements (e.g. interlock, stability, tipover restraints) as specified in the standards. 16 CFR 1261 incorporated by reference to the ASTM F2057-23 with no modification.	Meet See result data	PASS
--	--	---------------------------------	------

Sharp point and sharp edge (16 CFR 1500.48 & 49 (Mod))

	WAYF-HL-03042-GBL Shall have no sharp points / edges, other than those required for function. Modification: Expanded scope to other products.	Meet	PASS
--	--	-------------	------

Heavy metals in packaging (TPCH)

	WAYF-AN-09062.02-GBL-1 STAR ONLY Packaging and packaging component(s) shall not exceed 100 mg/kg sum of concentration levels of lead (Pb), cadmium (Cd), mercury (Hg) and hexavalent chromium (Cr VI).	Meet See result data	PASS
--	---	---------------------------------	------



ADDITIONAL TEST RESULTS FOR Wooden shelf

Evaluation	Citation / Method	Criteria	Result	Rating
Clothing storage unit safety standard	16 CFR 1261 / ASTM F2057-23	Applicable to all free-standing clothing storage units, including but not limited to chests, chests of drawers, drawer chests, armoires, chifferobes, bureaus, door chests, and dressers, which are 27 in. (686 mm) or greater in height, 30 lb (13.6 kg) or greater in mass, and contain 3.2 ft ³ (90.6 dm ³) or greater of enclosed storage volume. Shall comply with ALL sections of ASTM F2057-23.	M	PASS
Clothing storage unit safety standard	ASTM F2057-23 Section 4, Section 9	Shall comply with all performance requirements of ASTM F2057-23 when tested to section 4 and 9 with the unit set up in accordance with 8.1 of ASTM F2057-23.	M	PASS
Clothing storage unit safety standard	ASTM F2057-23 Section 10	Shall comply with all marking and labelling requirements of ASTM F2057-23	M	PASS
Clothing storage unit safety standard	ASTM F3096-23	Shall comply with all performance, labelling and instruction requirements of ASTM F3096-23	M	PASS
Clothing storage units - Anti-tip device – Presence	16 CFR 1261 / ASTM F2057-23 Sec 4.4	An anti-tip device shall be included with each item of furniture covered under the scope of this safety specification for attachment by the consumer.	M	PASS
Clothing storage units - Tipover restraints - Test method	16 CFR 1261 / ASTM F2057-23 Sec. 4.5 / ASTM F3096-23 Section 4	The tip over restraint shall withstand a force of 60 lb when tested to section 4 of ASTM F3096	M	PASS
Clothing storage units - Tipover restraints - Installation instructions	16 CFR 1261 / ASTM F2057-23 Sec. 4.5 / ASTM F3096-23 Section 5.1	Installation instructions shall include at a minimum the following: • Illustration showing installation method. • Detailed written instructions with step-by-step instructions on how to properly attach the tipover restraint. • Parts list including illustrations.	M	PASS
Clothing storage units - Tipover restraints - installation instructions	16 CFR 1261 / ASTM F2057-23 Sec. 4.5 / ASTM F3096-23 Section 5.2	Clear and complete installation instructions for the tipover restraint shall be included.	M	PASS
Clothing storage units - Tipover restraints - Labelling Requirements	16 CFR 1261 / ASTM F2057-23 Sec. 4.5 / ASTM F3096-23 Section 6	The following information shall be provided with each tipover restraint: • Manufacturer's name and address. • Date of manufacture (capable of identifying at a minimum the month and year of manufacture).	M	PASS
Clothing storage units - Interlock Requirement	16 CFR 1261 / ASTM F2057-23 Sec 4.6 & 9.1	Interlocks shall not require additional consumer action to engage during normal operation of the extendible element Interlocks shall not require consumer assembly and/or installation if the unit is shipped assembled, except as allowed in 4.6.1.1. Consumer assembly and/or installation of interlock components as part of the normal consumer assembly process is allowed for items shipped/sold unassembled. When tested to 9.1, the extendible element shall be	NA	/



ADDITIONAL TEST RESULTS FOR Wooden shelf

		considered interlocked to the open extendible element if either: (1) it remains closed during the test and is functional after tested extendible element is closed; or (2) its opening acts to close the extendible element originally open.		
Clothing storage units - Stability Test - Simulated Clothing Load	16 CFR 1261 / ASTM F2057-23 Sec 9.2.1/ASTM F2057-23 Sec 4.1,4.2,4.3	If 50% or more of the storage volume is extended, determine the weight for loading the extendible elements and/or space behind the doors based on the volume calculated in Section 5.4. Load per Section 8.3. 3.. If less than 50% of the storage volume is extended, the unit shall remain empty. Open all doors and extend all available extendible elements in accordance with Section 8.1.3. Elements shall remain open for 30 s. The unit shall not tip over during the test	M	PASS
Clothing storage units - Stability test - Simulated Horizontal Dynamic Force	16 CFR 1261 / ASTM F2057-23 Sec 9.2.2/Sec 4.1,4.2,4.3	Open all doors and all available extendible elements Apply 10 lbf (44 N) horizontal force, parallel to the direction of outward motion at the highest hand hold height, not to exceed 56 in on the extended element most likely to cause tip over This can be on an extendable element or door handle, whichever is highest, but not exceeding 56 in The unit shall not tip over during the test	M	PASS
Clothing storage units - Stability test - Simulating a Reaction on Carpet with Child Weight:	16 CFR 1261 / 16 CFR 1261 / ASTM F2057-23 Sec 9.2.3/Sec 4.1,4.2,4.3	Place the Test block(s) under the unit's most rear floor support(s), such as a leg, foot or upright Open all doors and all available extendible elements Gradually, over period of 5 seconds, apply the test apparatus with 60lb over the top of the door or extendable element most likely to cause tipover. Allow to rest without support for 30 seconds The unit shall not tip over during the test NOTE: Conduct multiple tests if it is not clear which element is most likely to cause tip over	M	PASS
Clothing storage units - Permanency of Labels and Warnings - Paper	16 CFR 1261 / ASTM F2057-23 Sec 9.3.1	A paper label shall be considered permanent if, during an attempt to remove it without the aid of tools or solvents, it cannot be removed, it tears into pieces upon removal, or such action damages the surface to which it is attached.	M	PASS
Clothing storage units - Permanency of Labels and Warnings - Non-Paper	16 CFR 1261 / ASTM F2057-23 Sec 9.3.2	A non-paper label shall be considered permanent if, during an attempt to remove it without the aid of tools or solvents, it cannot be removed or such action damages the surface to which it is attached.	NA	/
Clothing storage units - Permanency of Labels and Warnings - Applied Directly	16 CFR 1261 / ASTM F2057-23 Sec 9.3.3	The warning statements shall be considered permanent if the printing in the area tested per Method B - Cross-Cut Tape Test of Test Methods D3359 eliminating parallel cuts. is still legible and attached after being subjected to this test.	NA	/
Clothing storage units - Warnings on Product:	16 CFR 1261 / ASTM F2057-23 Sec 10.1	Each clothing storage unit shall be permanently marked in at least one place with the warnings from this section. The warnings shall be in a conspicuous location	M	PASS

ADDITIONAL TEST RESULTS FOR Wooden shelf

		when in use. The warnings shall be applied on one surface, not wrapped or folded around or over corners.		
Clothing storage units - Warnings Format and Content:	16 CFR 1261 / ASTM F2057-23 Sec 10.2	The warnings shall be formatted in a manner consistent with ANSI Z535.4. see below photo as an example. The contents of the warnings shall not be modified except as specifically indicated above and/or to include languages other than English. The warnings shall be permanent when tested in accordance with 9.3.1, 9.3.2, or 9.3.3 as appropriate.	M	PASS

*NA=Not applicable; M=Meet

Enclosed storage volume specification

Evaluation	Data
Overall Height	77-1/4in
Overall weight	115.5lbs
Total Enclosed Storage Volume	14.26ft ³

Enclosed Storage Component	Dimensions (in)	Volume (in ³)	Volume (ft ³)	Total Volume (ft ³)
Shelf x 1	30-1/4in W x 22-3/8in D x 46-5/8in H	15778.9 x 1	9.13	14.26
Drawer x 2	26-7/8in W x 15-1/8in D x 4-3/4in H	1879.99 x 2	1.09	
Shelf x 1	30-1/4in W x 22-3/8in D x 20-5/8in H	6979.95 x 1	4.04	



**BUREAU
VERITAS**

Test Report: (8526)077-0863

WAYFAIR LLC

Received Date: March 19, 2026

Report Date: March 26, 2026

ADDITIONAL TEST RESULTS FOR Wooden shelf

Toxics in Packaging - U.S. CONEG Legislation

Toxics in Packaging – Model Toxics in Packaging Legislation of the Toxics in Packaging Clearinghouse (TPCH)

Parameter	Unit	Result					Maximum Allowable Limit
		1	2	3	4	5	
Total Lead (Pb)	mg/kg	<5	<5	<5	<5	<5	-
Total Cadmium (Cd)	mg/kg	<5	<5	<5	<5	<5	-
Chromium VI (Cr VI) (see remark)	mg/kg	<5	<5	<5	<5	<5	-
Total Mercury (Hg)	mg/kg	<5	<5	<5	<5	<5	-
Sum	mg/kg	<20	<20	<20	<20	<20	100
Conclusion	-	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	-

Parameter	Unit	Result					Maximum Allowable Limit
		6	7	8	9	10	
Total Lead (Pb)	mg/kg	<5	<5	<5	11.8	<5	-
Total Cadmium (Cd)	mg/kg	<5	<5	<5	<5	<5	-
Chromium VI (Cr VI) (see remark)	mg/kg	<5	<5	<5	<5	<5	-
Total Mercury (Hg)	mg/kg	<5	<5	<5	<5	<5	-
Sum	mg/kg	<20	<20	<20	<20	<20	100
Conclusion	-	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	-

Parameter	Unit	Result					Maximum Allowable Limit
		11	12	13	14	15	
Total Lead (Pb)	mg/kg	<5	<5	<5	<5	<5	-
Total Cadmium (Cd)	mg/kg	<5	<5	<5	<5	<5	-
Chromium VI (Cr VI) (see remark)	mg/kg	<5	<5	<5	<5	<5	-
Total Mercury (Hg)	mg/kg	<5	<5	<5	<5	<5	-
Sum	mg/kg	<20	<20	<20	<20	<20	100



**BUREAU
VERITAS**

Test Report: (8526)077-0863

WAYFAIR LLC

Received Date: March 19, 2026

Report Date: March 26, 2026

ADDITIONAL TEST RESULTS FOR Wooden shelf

Conclusion	-	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	PASS Refer to 85252860100	-
-------------------	---	---------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------	---

Sample Description			
	Color / Component	Location	Style
1	black coating	sticker	All
2	black printed clear plastic	bag	All
3	red/clear plastic	seal bag	All
4	white foam	foam	All
5	soft white foam	film	All
6	clear plastic	tape	All
7	black plastic	corner	All
8	matt clear plastic	big bag	All
9	brown paper	corner	All
10	white paper	sticker	All
11	dull brown paper	small box	All
12	light brown wood	board	All
13	black printed brown paper	box	All
14	grey black printed white paper	manual	All
15	silvery metal	staple	All

Note: mg/kg = milligram per kilogram
 "<" = less than

Method: 1. Pb, Cd & Hg: Sample was digested with nitric acid and then analyzed by Inductively Coupled Argon Plasma Spectrometer or Inductively Coupled Argon Plasma Mass Spectrometer.
 2. Cr(VI): Sample was digested with alkaline mixtures and then analyzed by UV-VIS spectrophotometer.

Remark: Total chromium was determined.

ADDITIONAL TEST RESULTS FOR Wooden shelf

TOTAL LEAD CONTENT IN SURFACE COATING

- ☒ Consumer Product Safety Improvement Act (CPSIA) of 2008 "Ban of Lead-containing paint and certain consumer products bearing Lead-containing paint", (16 CFR 1303)
- ☐ Canadian Hazardous Products Act (CHPA), R.S., c. H-3, Schedule I, Part 1, Item 2
- ☐ NO COMPOSITE ☒ COMPOSITE

Element:				Lead		
Requirement: Maximum allowable limit:						
☐ CHPA limit:				☐ 600 mg/kg		
☒ CPSIA limit :				☒ 90 mg/kg		
Sample Description				Result	Conclusion	
	Color / Component	Location	Style	(mg/kg)	☒ CPSIA (90ppm)	☐ CHPA (600ppm)
1	black coating	track	All	<10	PASS	/
	golden coating	rim of cabinet	All	Refer to 85260770860		

LT = Less Than

* = Average of duplicate analyses

mg/kg = milligrams per kilogram (ppm = parts per million)

Detection Limit (ppm):10


In some cases, the tested component cannot be tested individually due to overlapped coatings.

CPSIA Third Party Report (☐ COULD/ ☐ COULDN'T/ ☒ NO COMMENT) be issued.

**EXHIBIT
PHOTO(S)**



**EXHIBIT
PHOTO(S)**

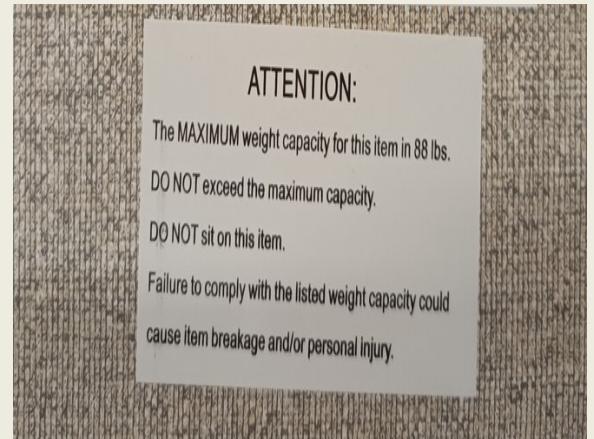



ADDITIONAL
DOCUMENT(S)
)

	COMPOSITE WOOD SAMPLE DECLARATION FORM EPA TSCA TITLE VI CARB §93120 ATCM FOR FORMALDEHYDE	CPSD-GB-08616.01-FORM	
		Version No.:	5
		Business Line:	GB

Section A – Sample Information:

This section must be completed.

Sample Description: **WOODEN SHELF**

Item/SKU Number: **HS020572**

Indicate if the sample is a:

- ☐ Panel
☒ Finished Good

Section B – EPA TSCA Title VI Applicability:

This section must be completed. The regulation can be viewed at: <http://www.epa.gov/formaldehyde>

- ☐ Composite wood **is not** present in the sample.

If checked, proceed directly to Section C.

- ☒ Composite wood **is** present in the sample **and**:

If checked, indicate if regulated and/or exempt. Then proceed to Section C.

- ☒ **Regulated** according to 40 CFR 770

If checked, answer the following three questions and complete the chart in Section D.

1. *Indicate the type(s) of regulated composite wood (check all that apply):*

- ☐ Hardwood plywood – veneer core (HWPW-VC)
☐ Hardwood plywood – composite core (HWPW-CC)
☒ Medium-density fiberboard (MDF)
☐ Thin medium-density fiberboard (Thin MDF)
☐ Particleboard (PB)

2. *Indicate laminated product status under §770.4 (effective after March 22, 2024 for laminated portion):*

- ☒ Sample **is not** a laminated product
☐ Sample **is** a laminated product **and**:
☐ Laminated portion **is not** exempt from the definition of hardwood plywood per §770.4
☐ Laminated portion **is** exempt from the definition of hardwood plywood per §770.4(a)(1)
☐ Laminated portion **is** exempt from the definition of hardwood plywood per §770.4(a)(2)

3. *For finished goods, indicate if labeling is present according to §770.45(c):*

- ☐ Sample **is not** a finished good
☒ Sample **is** a finished good **and**:
☐ Labeling **is not** present
☐ Labeling **is not** present **and not** required per §770.45(e)
☒ Labeling **is** present

- ☐ **Exempt** according to 40 CFR 770

Indicate the type(s) of exempt composite wood (check all that apply):

- ☐ Hardboard
☐ Oriented strand board
☐ Curved plywood
☐ §770.1(d)
☐ §770.1(e)(1)
☐ §770.1(e)(2)
☐ Other *List other type(s) of exempt composite wood and explain exemption:*



	COMPOSITE WOOD SAMPLE DECLARATION FORM	CPSD-GB-08616.01-FORM
	EPA TSCA TITLE VI	Version No.: 5
	CARB §93120 ATCM FOR FORMALDEHYDE	Business Line: GB

Section C – CARB §93120 ATCM for Formaldehyde Applicability:

This section must be completed. The regulation can be viewed at: <http://www.arb.ca.gov/toxics/compwood/compwood.htm>

Indicate if the sample will be sold in California. If "No" is checked, complete Section D if necessary from Section B, then proceed to Section E. If "Yes" is checked, complete the remainder of this section.

- ☐ No
☒ Yes

- ☐ Composite wood **is not** present in the sample.
If checked, proceed directly to Section E.

- ☒ Composite wood **is** present in the sample **and**:
If checked, indicate if regulated and/or exempt. Then proceed to Section E.

- ☒ **Regulated** according to the ATCM.
If checked, answer the following two questions and complete the chart in Section D.

1. Indicate the type(s) of regulated composite wood (check all that apply):

- ☐ Hardwood plywood – veneer core (HWPW-VC)
☐ Hardwood plywood – composite core (HWPW-CC)
☒ Medium-density fiberboard (MDF)
☐ Thin medium-density fiberboard (Thin MDF)
☐ Particleboard (PB)

2. For finished goods, indicate if labeling is present according to §93120.7(d):

- ☐ Sample **is not** a finished good
☒ Sample **is** a finished good **and**:
☐ Labeling **is not** present
☒ Labeling **is** present

- ☐ **Exempt** according to the ATCM.
Indicate the type(s) of exempt composite wood (check all that apply):

- ☐ Hardboard
☐ Oriented strand board
☐ Curved plywood
☐ §93120.7(b)(1)
☐ §93120.7(b)(2)(A)
☐ §93120.7(b)(2)(B)
☐ Other *List other type(s) of exempt composite wood and explain exemption:*

 COMPOSITE WOOD SAMPLE DECLARATION FORM EPA TSCA TITLE VI CARB §93120 ATCM FOR FORMALDEHYDE	CPSD-GB-08616.01-FORM	
	Version No.:	5
	Business Line:	GB

Section D –Regulated Composite Wood Details:

All fields in this section must be completed if regulated composite wood is present in the sample as declared in Section B and/or Section C. Upon completion of this section, proceed to Section E.

Panel Types and Emission Limits Reference:

Hardwood plywood (HWPW) ≤ 0.05 ppm
Medium-density fibreboard (MDF) ≤ 0.11 ppm
Thin medium-density fibreboard (Thin MDF) ≤ 0.13 ppm
Particleboard (PB) ≤ 0.09 ppm

Examples of resin type include but are not limited to:

- No-added formaldehyde-based (NAF) resin
- Ultra low-emitting formaldehyde (ULEF) resin
- Phenol-formaldehyde resin

Component of sample where composite wood is found:	Panel Type:	Emission Limit Met (ppm):	Resin Type:	Mill Name:	TPC Name:	TPC #:
Body	MDF	≤ 0.13 ppm	/	SHANDONG DINGSEN WOOD INDUSTRY PLATE CO., LTD.	ICTT	CARB/EPA 22056

Section E – Declaration Signature:

This section must be completed. Print name and provide a signature/ company chop.

- EPA TSCA Title VI / 40 CFR 770 is understood and if applicable, portions relevant to this sample have been met.
- CARB §93120 ATCM for Formaldehyde is understood and if applicable, portions relevant to this sample have been met.
- If a Third Party Certifier (TPC) is identified, it has been recognized by EPA and/or CARB.
- The required sections of this form have been completed accurately and truthfully.

Company Name: Fujian Zhongxin Furniture Co., Ltd


Company Address: Factory Building No. 1, No. 33 Xianghong South Road, Qingkou Town, Minhou County, Fujian Province

Date: March 10, 2026

Name: Zhuo Shijiang

Title: MANAGER

Signature:



Certification No: CARB/EPA22056

CERTIFICATE



Scan to validate

ICTT Corporation (TPC-43) has assessed and certified the manufacturer

SHANDONG DINGSEN WOOD INDUSTRY PLATE CO., LTD. (Mill No. ICTT-22056)

山东鼎森木业板材有限公司

The manufacturer's production line at:

Dingtao Economic Development Zone, Heze City, Shandong Province, China

中国山东省菏泽市定陶经济开发区

For the following products

MDF (8-25mm)

Emission level: CARB Phase 2 and TSCA Title VI
In accordance with

Sections 93120-93120.12, California Code of Regulations-to Reduce Formaldehyde Emissions from Composite Wood Products
and 40 CFR part 770 - Formaldehyde Standards for Composite Wood Products under regulation of TSCA Title VI.

Date of initial certification: November 11, 2022

Updated on November 10, 2025 Valid to November 10, 2026



ICTT Corporation
U.S. Add: 623 W BRIDGES AVE AUBURNDALE, FL 33823
China Add: B-22-3 of Gangtian High Rise Building, 2nd Zhongshan Rd, YuZhong, Chongqing, China

Mark Chan - Vice President-Quality Control
ICTT Corporation

Manufacturer name: Fujian Zhongxin Furniture Co., Ltd

Address: Factory Building No. 1, No. 33 Xianghong South Road, Qingkou Town, Minhou County, Fujian Province

Production Date: 3/2026

END OF REPORT