**Auto
Care
Products, Inc.**

ProSeal™

Nail-On Garage Door Bottom Seal
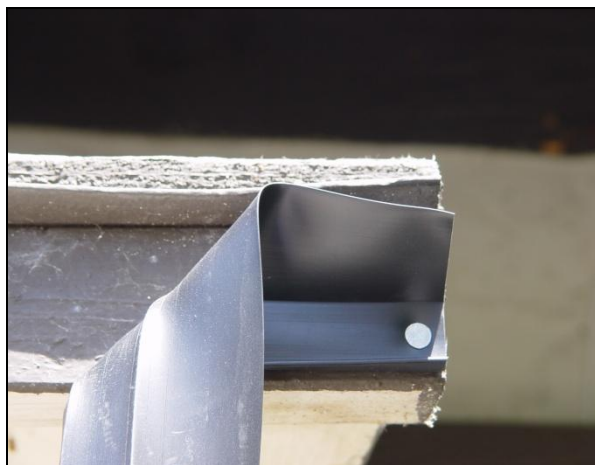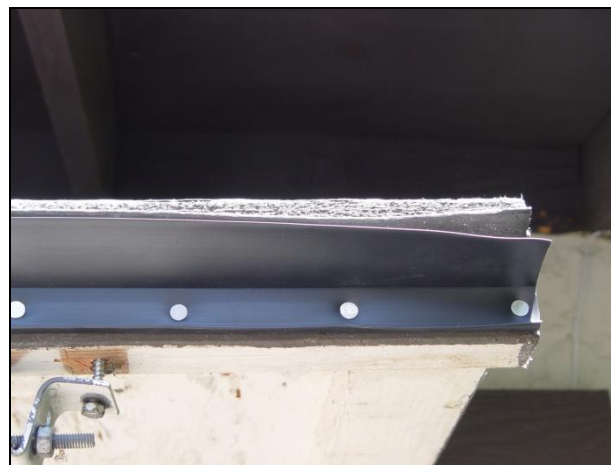
Installation Instructions

Figure 1

Figure 2

Position the Door Seal towards the inside edge of the garage door, so when the door is closed, the door seal will be closest to the inside of the garage. See Figure 1. The Door Seal must be positioned with the long leg towards the street. Attach the Door Seal to the garage door with one of the galvanized roofing nails, as shown in Figure 1. Next, use the nails to attach the Door Seal to the garage door every 4 inches. See Figure 2. When you have finished attaching the Door Seal to the full length of the door, use a scissors or utility knife to cut off the excess Door Seal.

Made in U.S.A.