

## DHX Trend & Plus Electric Tankless Water Heater Sizing Guide

	42°F	52°F	62°F	72°F
<b>DHX 3.5-1 Trend</b>				
<b>3.5 kW</b>				
<b>MAX. FLOW RATE</b>	0.5 GPM	0.6 GPM	0.85 GPM	1.3 GPM
<b>POSSIBLE FIXTURES</b>				

<b>DHX 6-2 Trend</b>				
<b>6.0 kW</b>				
<b>MAX. FLOW RATE</b>	0.85 GPM	1.1 GPM	1.5 GPM	2.3 GPM
<b>POSSIBLE FIXTURES</b>				


<b>DHX 8-2 Trend</b>				
<b>7.2 kW</b>				
<b>MAX. FLOW RATE</b>	1 GPM	1.3 GPM	1.8 GPM	2.7 GPM
<b>POSSIBLE FIXTURES</b>				

<b>DHX 10-2 Trend</b>				
<b>9.6 kW</b>				
<b>MAX. FLOW RATE</b>	1.4 GPM	1.7 GPM	2.3 GPM	3.6 GPM
<b>POSSIBLE FIXTURES</b>	1 GPM OR	1.2 GPM OR	1.5 GPM OR	2 GPM OR

<b>DHX 12-2 Plus &amp; Trend</b>				
<b>12.0 kW</b>				
<b>MAX. FLOW RATE</b>	1.3 GPM	1.55 GPM	1.9 GPM	2.5 GPM
<b>POSSIBLE FIXTURES</b>	OR	OR	OR	OR

<b>DHX 15-2 Plus &amp; Trend</b>				
<b>14.4 kW</b>				
<b>MAX. FLOW RATE</b>	1.6 GPM	1.9 GPM	2.3 GPM	3 GPM
<b>POSSIBLE FIXTURES</b>	OR	OR	OR	OR

Max. Flow Rates shown for 240V models are correct if installed with 240V service. Increase one model size if unit will be installed with 208V service.

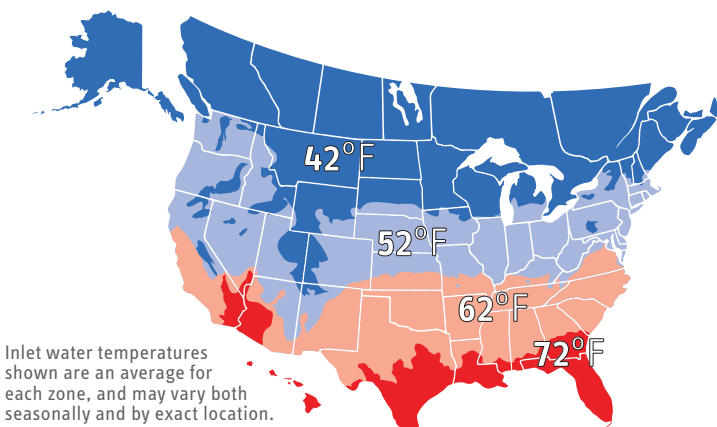


### FIXTURES & FLOW RATES for model possibilities and temp. for max. flow rate calculation

- SINGLE LAV SINK** 90°F  
(Range 0.5-1.5)
- SHOWER** 105°F  
(Range 1.0-2.5)
- KITCHEN SINK** 105°F  
(Range 1.0-2.2)

Higher temps reduce flow rates

# DHX Trend & Plus Electric Tankless Water Heater Sizing Guide

Temperature Rise vs. Flow Rate at Max Rated Voltage

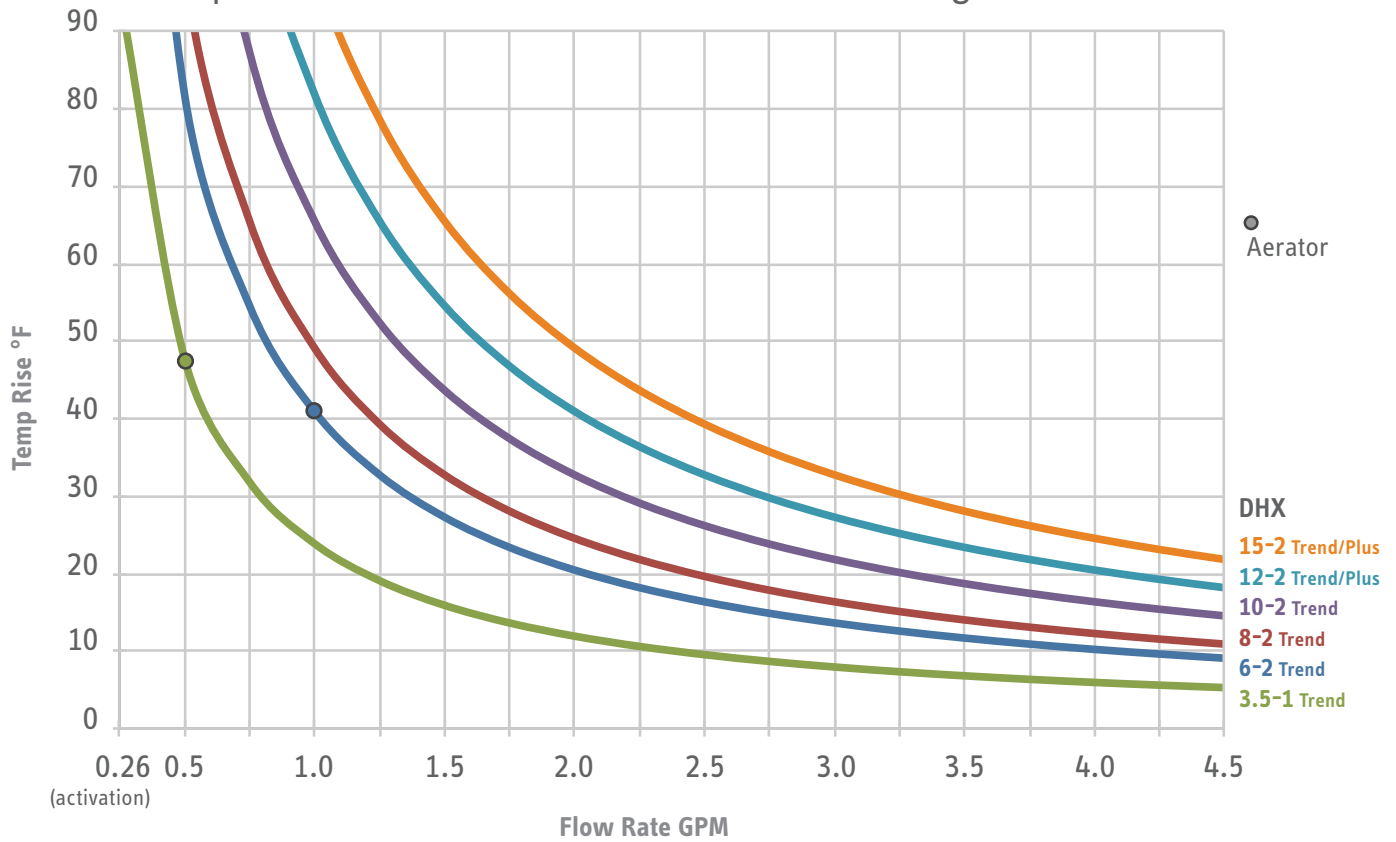

Temperature Rise vs. Flow Rate at 208 V

