


THE SOLUTION FOR
ECOLOGICAL PERMEABLE PAVER
FOR INDUSTRY AND COMMERCE.

Data Sheet



Gravalock *Premium*

P56

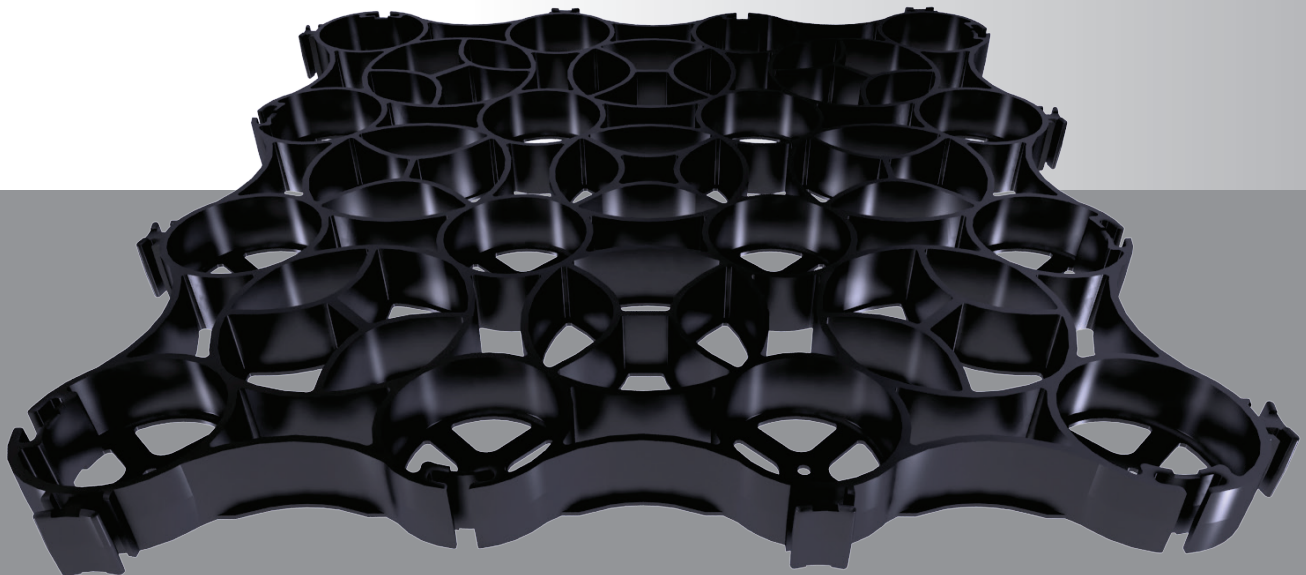

www.gravalock.com
customerservice@gravalock.com



Gravalock[®]
permeable paver



Gravalock[®]
permeable paver



Gravalock Premium

Applications

- Industry and commerce.
- Trailer yards.
- Low speed secondary roads.
- High traffic parkings.
- Roads for heavy vehicles.



Technical specifications P56

Grid area	22" x 22" (3.33ft ²)
Grid height	1 1/2"
Load capacity	60t / axis
Material	100% recycled polypropylene
Color	Black with UV protection
Permeable area	80%
Compressive strength	98 lb / ft ² (increases dramatically filled with gravel)
Temperature range	-50 °C a 90 °C
Volume of gravel required by ft ² of installed grid.	0.22ft ³ aprox.
Chemical resistance	Water, salt, fuel, oils, alcohol, acids, and acid rain.
Environmentally friendly	No toxic, does not damage animals or plants neither contaminates water
Assembly speed	1070ft ² per man hour

Dimensions



Load capacity

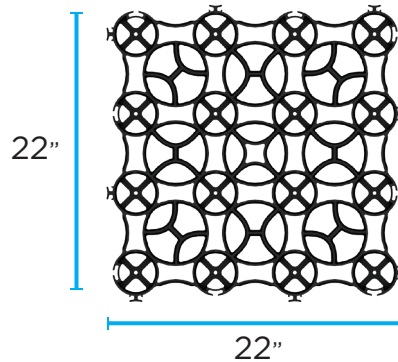

Returns rain water to soil

Installation

Gravalock Premium P56 grids filled with gravel from 3/8" to 1/2"

