

Model# HRG3618U

Thor Kitchen 36-inch Professional Gas Range



FEATURES

- Black Porcelain Drip Pan On Cook Top
- Heavy Duty Continuous Cast Iron Cooking Grates
- Automatic Re-ignition Safety Feature
- Blue LED Illuminated Knobs
- Stainless-Steel Professional Style
- Blue Porcelain Oven Interior
- 2 x Halogen Lights
- Commercial Convection Fan

12K	12K	12K
15K (650 BTU Simmer)	18K	15K (650 BTU Simmer)

BURNER PERFORMANCE

Total Number of Range Top Burners	6 Burners
Front Right (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Front Left (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Front Middle (Single)	18,000 BTU
Rear Right (Single)	12,000 BTU
Rear Left (Single)	12,000 BTU
Rear Middle (Single)	12,000 BTU
Infrared Broil burner	16,500 BTU
U-shape Bake burner	22,000 BTU

TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	120V
Circuit Breaker (A)	15 or 20 A
Frequency (Hz)	60 Hz

ACCESSORIES (NOT INCLUDED)

LPKHRG3618U	Liquid Propane Gas Conversion Kit
TR36SS	36-inch Telescopic Rack
ITHRG3618U	36-inch Island Trim
RG1022	Cast Iron Reversible Griddle
RG1032	Cast Iron Range Griddle



DIMENSION & WEIGHT

Product Dimension

Product width	36"
Product height (from bottom to top of back splash)	38.48"-39.48"
Product height (from bottom to top of side panel)	35.67"-36.67"
Product depth (from back panel to bullnose)	27.94"
Product depth (from back panel to control board)	26.52"
Product depth (from back panel to side panel front)	24.82"
Depth of control panel (minimum)	1.7"
Depth of control panel (bullnose)	3.12"
Cast iron cooking grate (W x L)	10 3/4" * 23"
Adjustable legs	not to exceed 1"

Required Cutout Size (W x D x H)

Oven Cavity Dimension	36 1/8" x 24.82" x 35.67(+1)"
Oven Rack Dimension	30"W * 15 1/4"H * 18"D
Distance between Oven Rack	28 3/4" * 15 1/2"
	2 1/8"

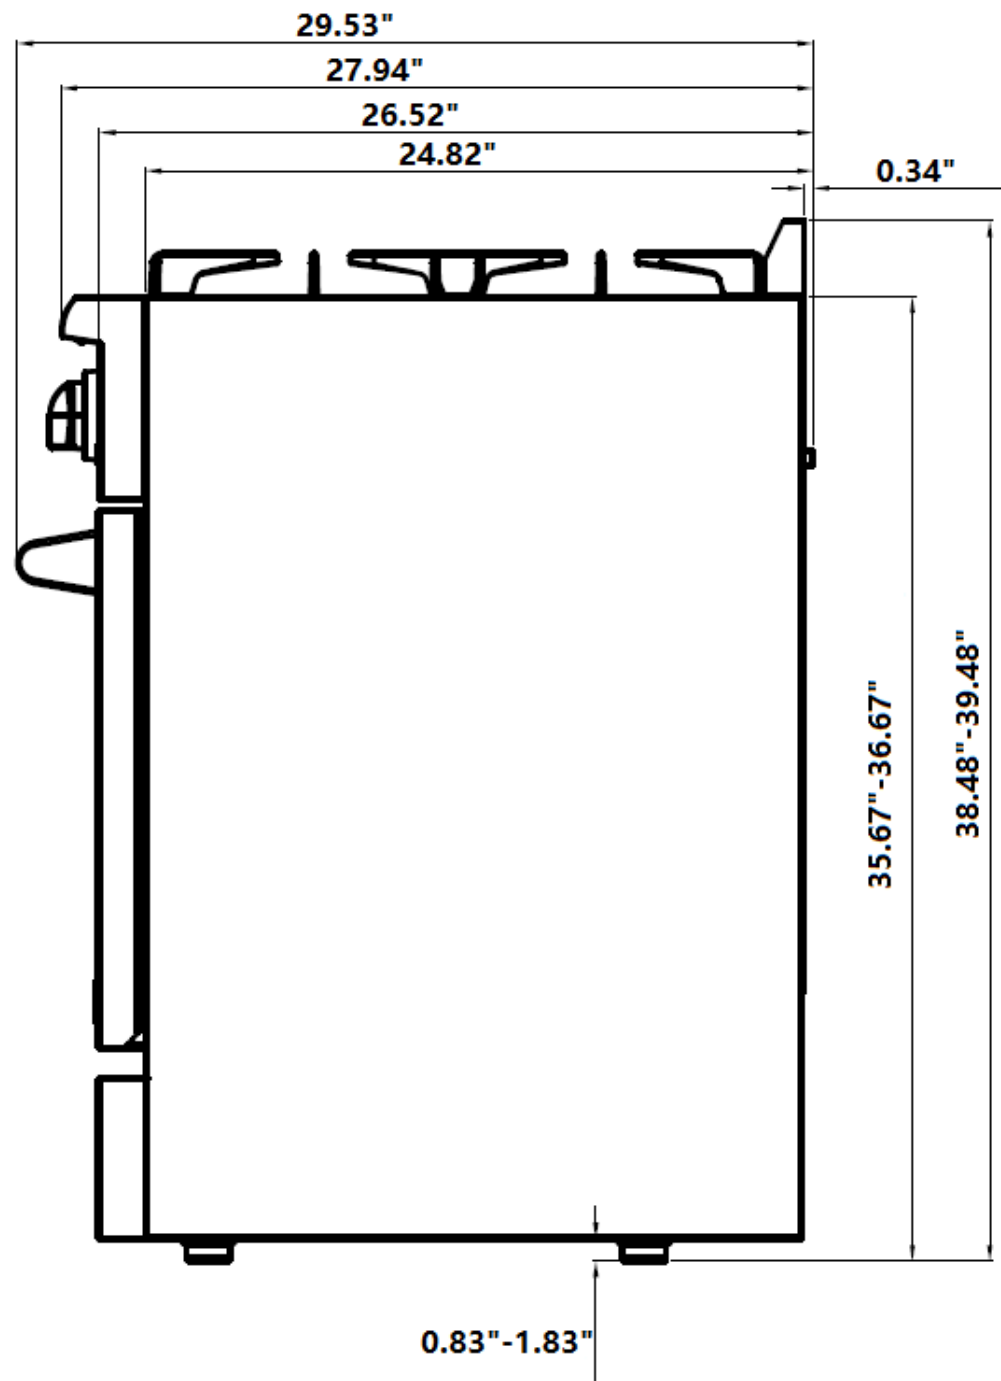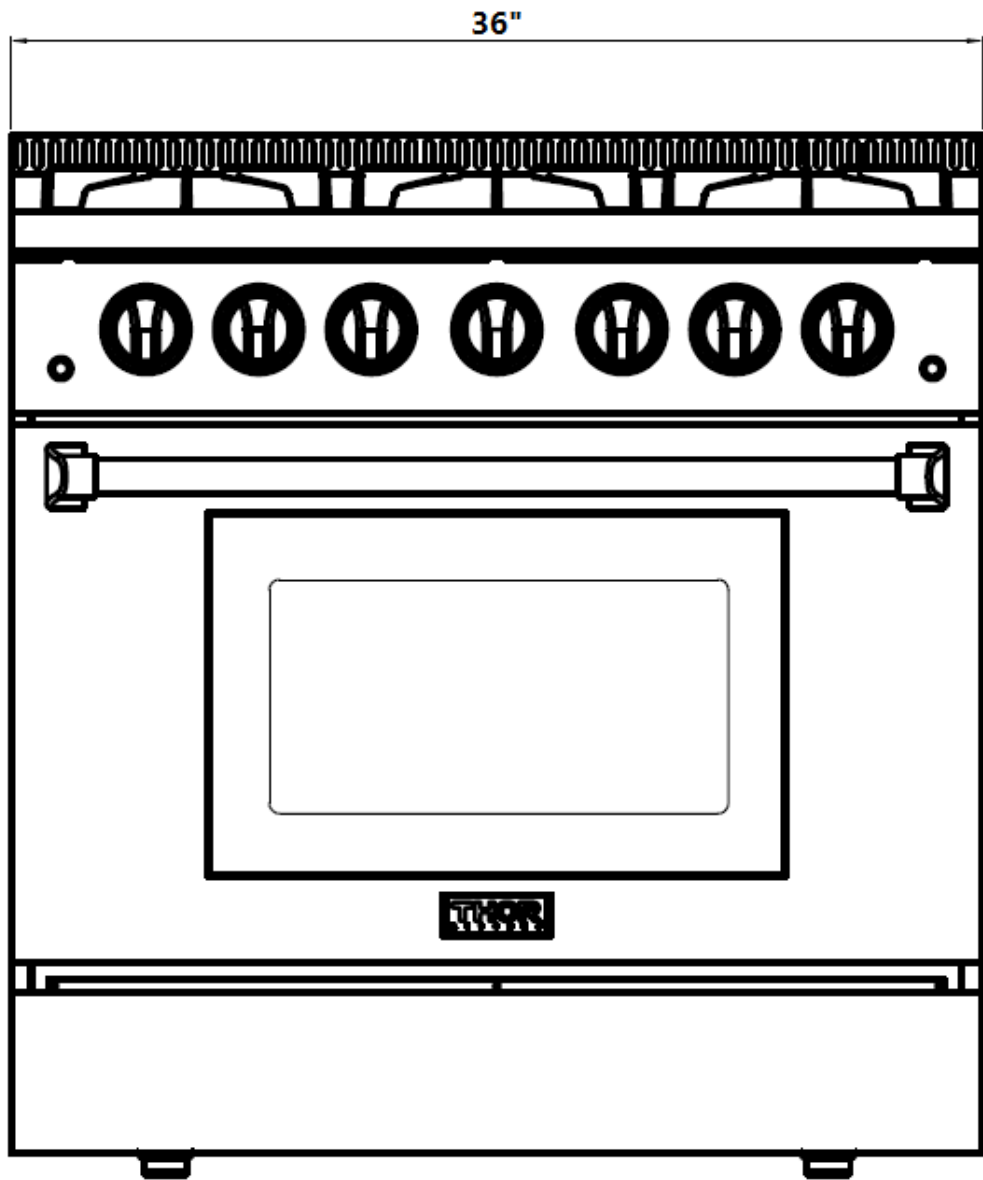

NG: Input Pressure: 7 inches, Output Pressure: 5 inches
LP: Input Pressure: 11 inches Output Pressure: 10 inches
Size of Regulator: ½ inch

