


STAINLESS STEEL PULL-DOWN KITCHEN FAUCET

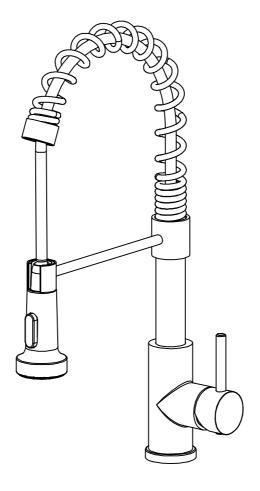

THANK YOU

We appreciate the trust and confidence you have placed in Glacier Bay through the purchase of this kitchen faucet. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Glacier Bay!

Table of Contents

mportant Information2	Installation4
Warranty 2	Care and Cleaning5
Pre-Installation2	Troubleshooting5
Planning installation2	•
Tools and Hardware Required2	

Important Information

- □ Observe all local plumbing and building codes.
- □ Cover the sink drain to avoid losing any parts.
- □ Review all the warnings, care, and maintenance information.

Warranty

LIMITED LIFETIME WARRANTY

Glacier Bay products are manufactured with superior quality standards and workmanship and are backed by our limited lifetime warranty. Glacier Bay products are warranted to the original consumer purchaser to be free of defects in materials or workmanship. We will replace FREE OF CHARGE any product or parts that prove defective. Simply, return the product / part to any of The Home Depot retail locations or call 1-855-HD-GLACIER (1-855-434-5224) to receive the replacement item. Proof of purchase(original sales receipt) from the original consumer purchaser must be made available for all Glacier Bay warranty claims.

This warranty excludes incidental/inconsequential damages and failures due to misuse, abuse or normal wear and tear. This warranty excludes all industrial, commercial & business usage, whose purchasers are hereby, extended a five year limited warranty from the date of purchase, with all other terms of this warranty applying except the duration of warranty.

Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state and province to province. Please see a store or contact 1-855-HD-GLACIER for more details.

Pre-Installation

PLANNING INSTALLATION


Before beginning the installation of this product, ensure all parts are present. Compare parts with the Part List. If any part is missing or damaged, do not attempt to install the product. Contact Customer Service for replacement parts.

TOOLS AND HARDWARE REQUIRED



Pre-Installation (continued)

PART LIST

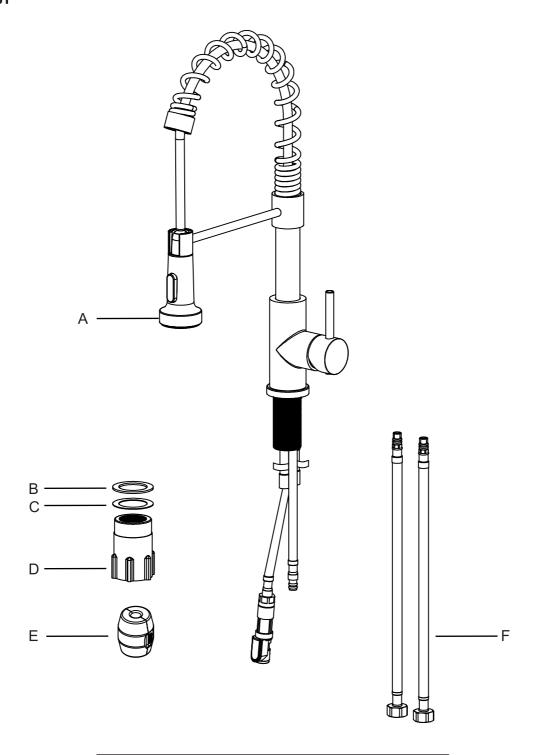


Part	Description	Quantity
Α	Faucet Assembly	1
В	O-ring	1
C	Gasket	1
D	Lock Nut	1
Ė	Weight	1
F	Supply hose	2

Installation


1 Assembling the faucet

- □ Connect the supply hose (F) accordingly to the red and blue label on the faucet.
- Insert the faucet body into the hole in the countertop or sink.




Installing mounting hardware

Insert O-Ring(B), gasket(C) and lock nut(D) from underneath the countertop to the faucet and tighten it.



Attaching the quick connector to outlet hose and install the weight

- Push the quick connector of spray hose firmly upward and attach it to the receiving block of outlet hose.
 Push until a "Click" is heard.
- Install the weight (E) on the weight here label position.




4 Making the water supply connections



CAUTION: The hot and cold inlet tubes are indicated by their colors: red means hot and blue means cold. Avoid twisting wires together or placing the wires close to each other and damaging.

Thread the nut on the supply hose (F) onto the outlet of the water supply valve and tighten with a wrench. Do not overtighten.



Care and Cleaning

- To clean, wipe down with a damp cloth and dry with a towel.
- Do not use abrasive cleaners, steel wool, or harsh chemicals when cleaning this faucet, or the warranty will be voided.

Troubleshooting



NOTE: Refer to the service parts on the website for a detailed drawing showing the location of the parts listed below.

Problem	Possible Cause	Solutions	
There are leaks underneath the handle.	The screw nut has come loose and the o-ring on the cartridge is dirty or damaged.		Tighten the screw nut. Clean or replace the cartridge or o-ring.
The aerator leaks or has an inconsistent water flow pattern.	The aerator is dirty or misfitted. The cartridge may be clogged.		Remove the aerator and check for debris in the aerator screens.
			Remove the cartridge and check for debris.
			Ensure the aerator is properly installed.
There are leaks from the hose underneath the deck.	The supply hose and outlet hose connection may be loose.		Tighten the connection of the hoses.
The hose does not retract.	The weight is not installed in the appropriate position.		Reinstall or readjust the weight.
The water pressure is low.	The connector underneath the deck is clogged with debris. The aerator is clogged.		Turn off the water supply and disconnect the connector / aerator.
			Unscrew the connector / aerator and clean under running water.
			Screw the connector / aerator back.
			Test water flow. If water pressure is still low then replace the connnector / aerator.
There is no hot or cold water.	The water supply hose was accidentally kinked during installation and is limiting the water flow through.		Reinstall the water supply hose.



Questions, problems, missing parts? Before returning to the store, call Glacier Bay Customer Service 8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

HOMEDEPOT.COM/GLACIERBAY

Retain this manual for future use.