## Lasts up to 3 years

Regular cleaning and maintenance required for slip resistance maintenance.

## Safe for use on the following surfaces and areas:


- Porcelain
- Ceramic
- Honed Stone
- Concrete
- Slate
- Glazed Brick
- Sautillo, and more....
- Porcelain / Fnamel Bathtubs
- Showers
- Entryways
- Pool areas
- · Walkways, and more.....

Test small hidden area first.

Not for use on Polished Marble

1 Quart / .95 L, Treats Approx. 100 sq. ft / 10 sa. meters

**CAUTION:** Keep out of reach of children. Avoid eye contact. Use in well ventilated area. May be fatal if swallowed. If ingested, give large quantities of water and seek medical attention immediately. Do not induce vomiting. Wash hands thoroughly with soap and water. Wear rubber gloves and goggles. Do not mix with bleach or other chemicals. CORROSIVE, Contains Glycolic Acid, not for use on wood or vinyl.

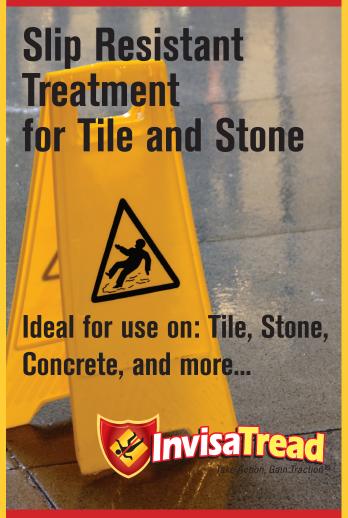

InvisaTread® increases slip resistance without changing the look, feel or color of most surfaces.

## **Application**

Step 1: Clean, rinse and dry area. Try to leave grout joints wet. Use TractionWash™ for optimum results.

Step 2: Apply InvisaTread® liberally to surface using either a sponge, sponge mop or sprayer. (Air pump sprayer for larger areas) Test small hidden area first for desired dwell time. Start with 6-8 min, for tile (3-5 min. for shiny tiles) Test area with foot and water for desired slip resistance after rinsing

Step 3: Rinse surface thoroughly with 1:5 dilution of Traction Wash to remove residue material.

- · Do not apply to grout that has cured for less than 30 days
- It is recommended that grout is sealed prior to application
- Dark colored grout might experience a change in color.
- · Area may be used immediately.
- · Always test small hidden area first
- · Not for use on Polished Marble

Visit: www.invisatread.com for detailed application instructions







www.invisatread.com