


PRODUCT SPECIFICATION

Dimension	Size	Watts	Lumens
20" x 28"	51 x 71 x 4 cm	48W	4610LM
24" x 32"	61 x 81 x 4 cm	60W	5400LM
24" x 36"	61 x 91 x 4 cm	60W	5800LM
28" x 36"	71 x 91 x 4 cm	90W	6200LM
30" x 36"	76 x 91 x 4 cm	90W	6400LM
36" x 36"	91 x 91 x 4 cm	90W	7000LM
40" x 24"	101 x 61 x 4 cm	90W	6200LM
40" x 32"	101 x 81 x 4 cm	90W	7000LM
48" x 30"	121 x 76 x 4 cm	90W	7600LM
48" x 36"	121 x 91 x 4 cm	90W	8200LM
55" x 30"	139 x 76 x 4 cm	90W	8400LM
55" x 36"	139 x 91 x 4 cm	108W	9000LM
60" x 36"	151 x 91 x 4 cm	108W	9400LM
71" x 36"	180 x 90 x 4 cm	108W	10100LM

PARAMETER	SPECIFICATION
Color Temperature	3000K-6000K
Input Voltage	AC100-120V
Output Voltage	24V DC
CRI	≧ 90 Ra
Working Temperature	-10~45℃
Life Span	25000 hours
Anti-fog	Yes
IP Rate	IP44
Wiring Method	Hardwired / Plug In
Switch	Touch Sensor Switch

TETOTE
BATHROOM LED MIRROR

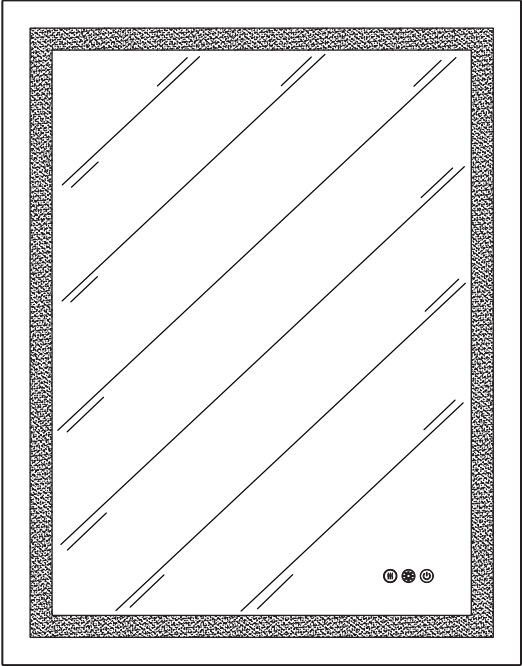

INSTALLATION MANUAL

If you have any questions, please feel free to contact us on


sales@tetote-tech.com

CONTACT US

 **Note:** After opening the package, Please inspect the product immediately for damage in transit or missing parts. If there is any missing, Please contact us by (sales@tetote-tech.com) or you can contact us at Amazon by following these steps:

- Open "Orders" at Amazon
 - Find the product you have purchased and open the product page
 - Click Sold by "tetote" -Click"Ask a question"
 - Click "An order I have placed"
 - Click "Your product" -Click "Other" -Click "Troubleshooting"
- Then you can send us messages,we will reply within 24 hours.

Packing list

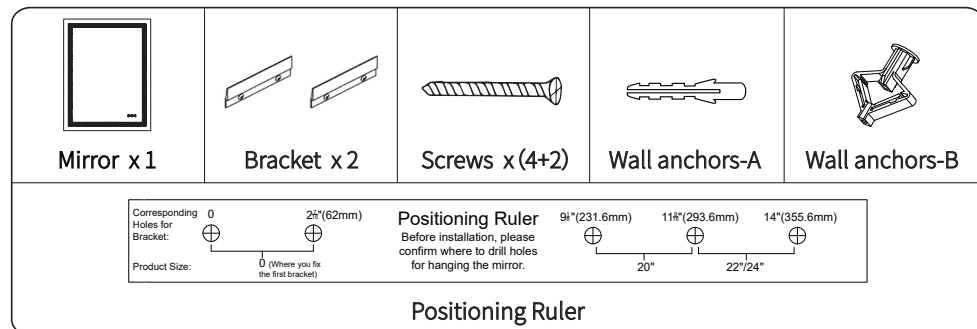

 **Manufacturer warranty for 2 year from date of purchase.**

USE INSTRUCTION

1. Please use in safe voltage range. (100V-120V)
2. Use electrical tape to wrap around the wires to prevent leakage.
3. Do not strike mirror glass with hard or pointed items.

 **DANGER:** Before installation, make sure the main power is cut off.

 **WARNING:** Installation must be performed by a qualified licensed electrician.

BEFORE INSTALLATION

 **Note:** Thank you very much for using tetote products, in order to facilitate the use of tetote products, please read this instruction carefully before you begin installation.

1. Important Safety Instructions:

- Please read all instructions carefully before assembling the item.
- Assembly by two or more adults is highly recommended.
- To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
- Disconnect power before installing, adding or changing any components.
- Ensure that the fixing location is able to take the weight of the complete fitting.
- To prevent injury, the mirror must be installed according to these instructions.


2. Pre-assembly:

- After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
- Keep the voltages between 100V and 120V. If the voltage exceeds 120V, please use transformer.
- You can connect the wires directly to your junction box or the plug.

3. Before installation, please check to make sure the mirror is working properly :

- ① The left button is the anti-fog touch. 

In order to prevent wasting energy, the defogging function will automatically turn off after 1 hour.

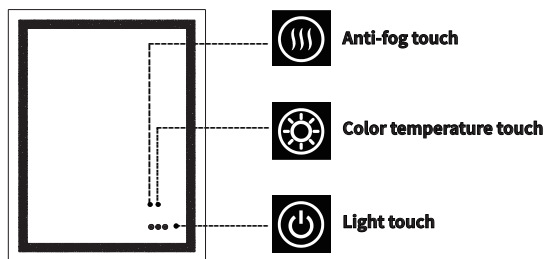

② The middle button is the color temperature touch. 

The first touch is white light, the second touch is yellow light, the third touch is natural light, and so on. Press and hold it to infinitely adjust the color temperature.

③ The right button is the light touch. 



The first touch is to turn on all the lights, the second touch is to turn on only the front lights, the third touch is to turn on only the back lights, and the touch again turns off all the lights, and so on. Press and hold it to infinitely adjust the brightness.

If no button is pressed within 15 seconds, pressing again will turn the light off immediately.

Memory Function : The current setting of the mirror will be saved. When you turn on the mirror next time, it will be in the same settings as it was.

INSTALLATION

Installation tools

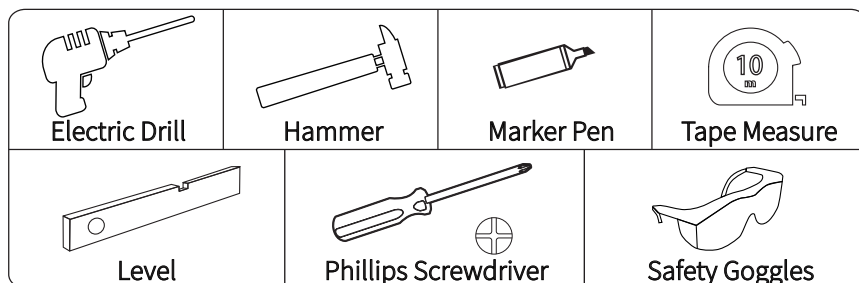


 **Note:** Before installation, please confirm the position of the mirror hanging hole.

The first line is the hole position distance. Before punching, please confirm that the hole position of the positioning ruler is consistent with the hanging hole of the product.


The second line is the product size. Find the position of the corresponding hole according to the product width of the selected suspension mode.

Choose the hanging method according to your preference, use the positioning ruler to confirm the position of the hanging hole, make sure it is horizontal, and use a marker to mark the hole positions ①②③④ on the wall.

 **Note:** Please keep the proper distance from the mirror to the faucet.

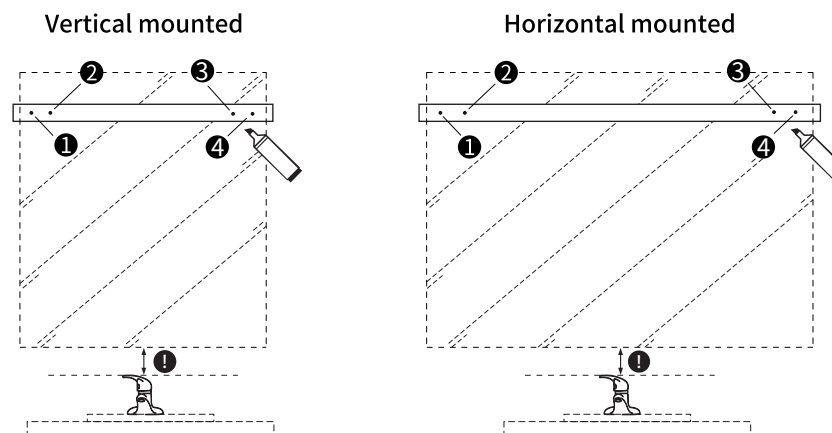

3. Use an electric drill to punch holes at the marked spots, and then apply wall anchors with hammer.

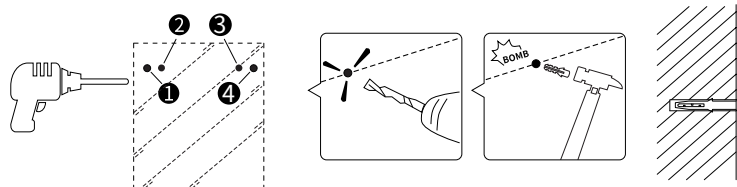


Thickness of wall > 16mm (1/4" (6mm) drill bit, drilling depth in 1 31/32" (50mm))

Thickness of wall 8 ~ 16mm (25/64" (10mm) drill bit)

Thickness of wall < 8mm **Unapplicable**

! Note: Please wear goggles and pay attention to safety.

Insert the screw

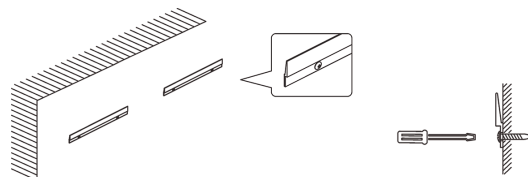


Screw the two brackets on wall.

4. Connect the power. You can use the plug directly or connect the wire to a standard switch lighting circuit.

● Use plug

After hanging the mirror, insert the plug directly into the standard socket.

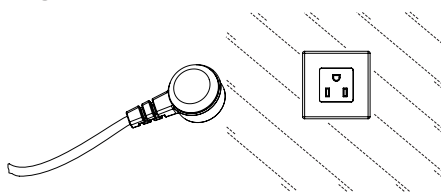

● Installation hardwired

Cut the plug and connect the mirror's wire to the power by the wire connectors.


! DANGER: Before installation, make sure the main power is cut off.

BLACK WIRE --- POWER SUPPLY L (LIVE)


WHITE WIRE --- POWER SUPPLY N (NEUTRAL)

GREEN WIRE --- POWER SUPPLY E (EARTH)

WARNING: This mirror must be earthed.

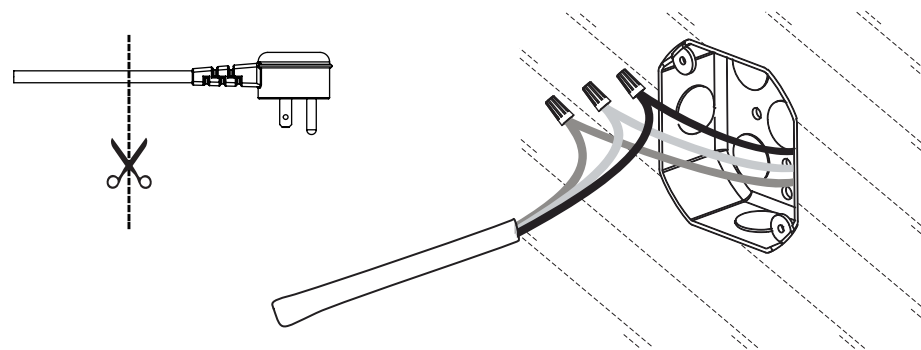

5. Place the mirror against the wall, align the hook with the bracket slot, slowly lower it so that the hook fits into the slot, and gently shake the mirror to ensure that the mirror is securely installed.

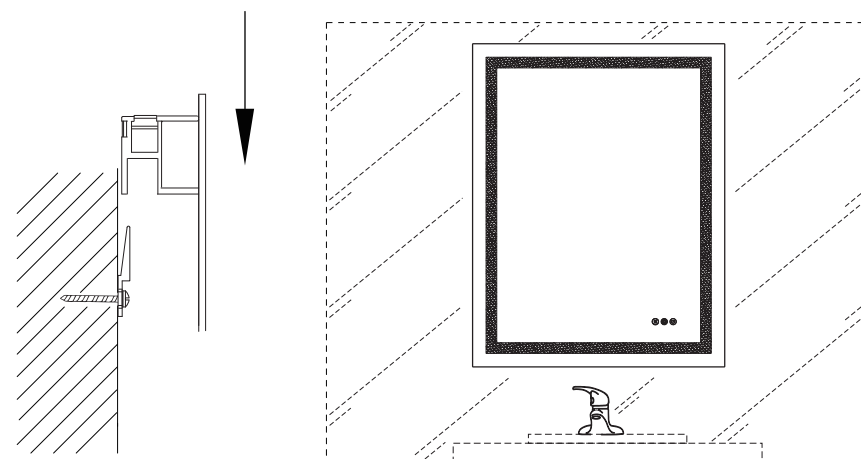

! Note: Two-person installation.

Completion !