



1000P-SD

15 cu ft POLY SWIVEL DUMP CART

U.S. Patent No. 8,496,298 & 9,242,588



**READ AND FOLLOW ALL SAFETY RULES AND OPERATING
INSTRUCTIONS BEFORE USING THIS EQUIPMENT**

Safety Rules



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

Read and understand all safety rules and operating instructions before using this tractor attachment.

Follow all safety rules and operating instructions provided by your vehicle's manufacturer when using attachment.

Never allow children or untrained persons to operate vehicle or attachment.

Do not exceed the vehicle manufacturer's towed weight limit.

Reduce vehicle speed and allow extra stopping distance when towing heavy loads.

Reduce vehicle speed and towed weight when operating on slopes.

Operate up and down slopes, never across the face of slopes.

Do not carry passengers on vehicle or attachment.

Avoid sudden turns or maneuvers.

Do not tow attachment on public roadways.

Do not remove warning decals from product.


Check product for worn, loose, or damaged parts before each use. If any damage is present, repair the product before using.

Check product for loose or missing fasteners before each use. Tighten or replace fasteners as needed before using.


Do not exceed vehicle speed of 6 miles per hour when towing Dump Cart.

Do not exceed Dump Cart rated weight capacity of 1000 pounds.


Carton Contents

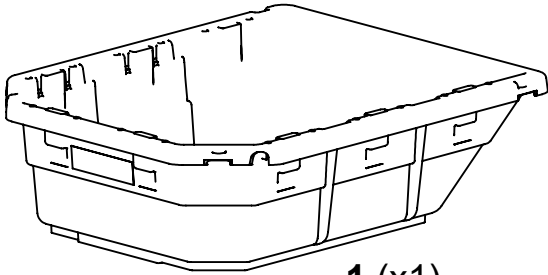


1 (x1)

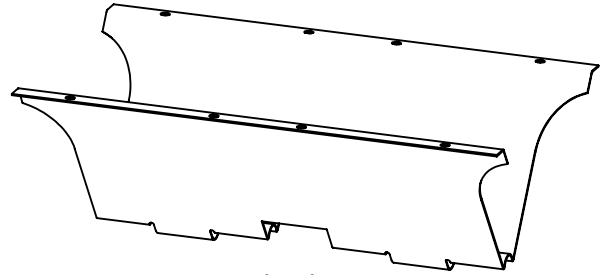


2 (x1)

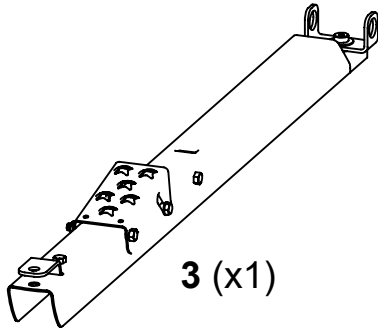


3 (x1)




19 (x1)




20 (x1)

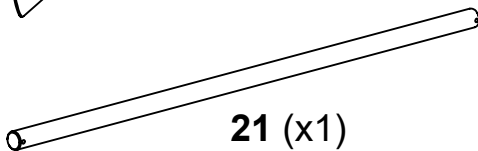


21 (x1)




22 (x2)



23 (x4)




24 (x2)




25 (x12)



26 (x12)

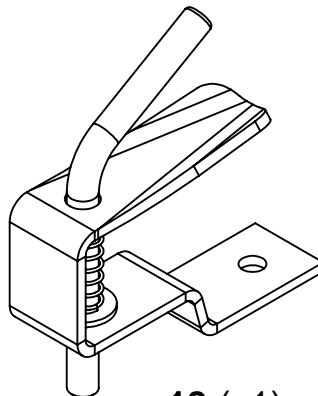

18 (x1)

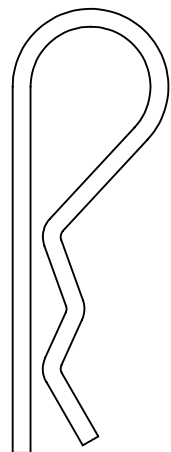

27 (x2)


TOOLS REQUIRED FOR ASSEMBLY:

- 1/2" Wrench or Socket
- Grease Gun

Assembly Instructions


1

Attach Undercarriage to Poly Body and tighten hardware.

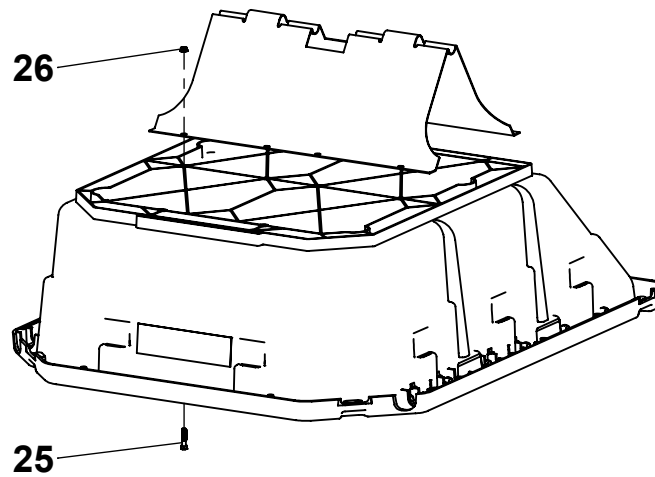


2

Attach Front Support to Poly Body and tighten hardware.

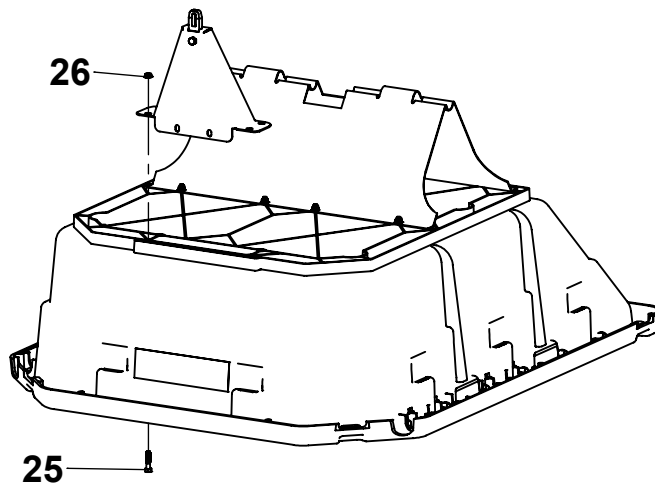

3


Insert Axle into Undercarriage halfway as shown. Center Spacer inside Swivel Clevis and align with Axle.

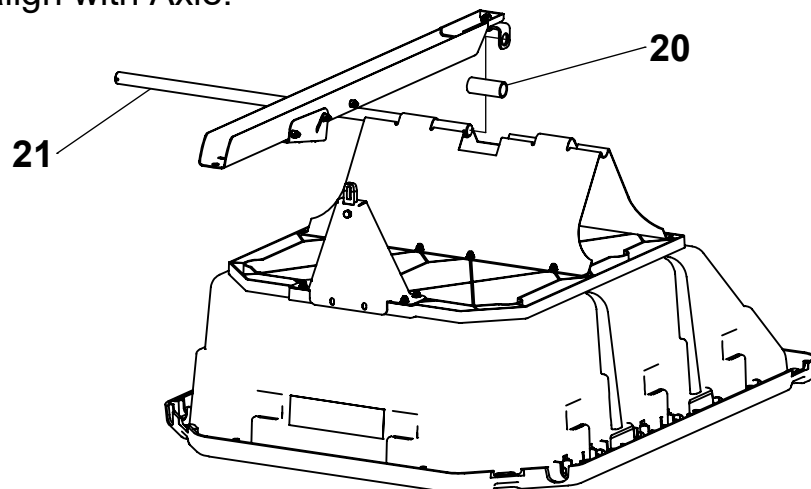

Assembly Instructions

4

Slide Axle completely through Undercarriage; Swivel Clevis and Spacer must be captured by Axle. Align Drawbar with Front Support and press down to latch.

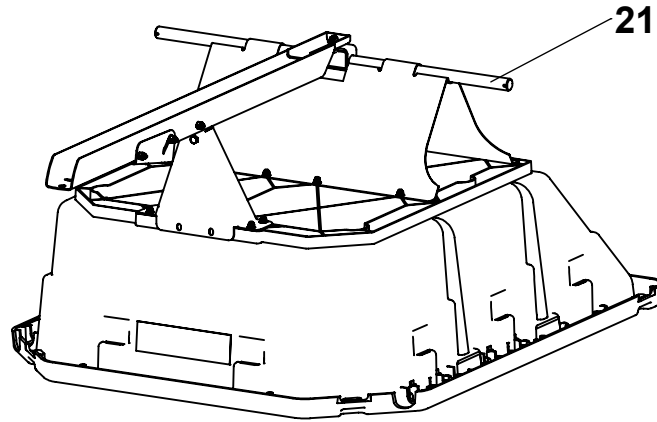


5

Slide in order: 1" Washers, 2" Spacers and then Wheels onto Axle and secure with Hairpins.


NOTE:

WHEELS IN MODEL
NOT SHOWN TO SCALE

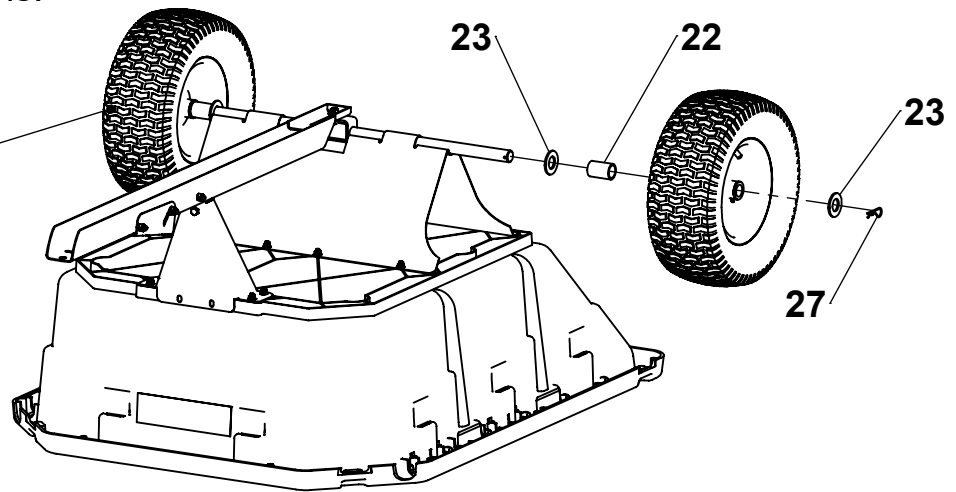

6

Install Spring-loaded Hitch Pin as shown.

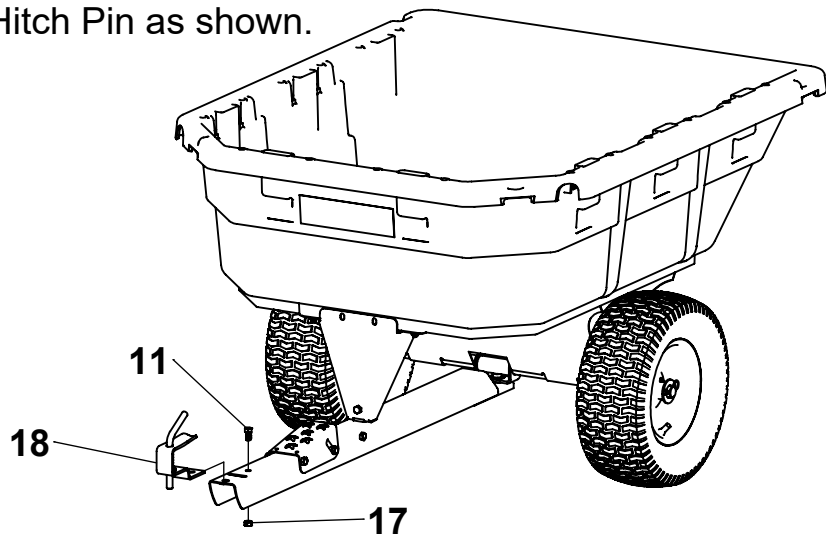

Operating Instructions

Before Using Dump Cart:

1. Apply grease to wheels using grease gun until grease can be seen squeezing out from both sides of the wheel.
2. Check tire pressure and inflate to 28 psi if needed.
3. Read all Safety Rules found on page 1.

How to Use Dump Cart:

1. Attach Dump Cart to your tractor using the supplied hitch pin.
2. Do not exceed 1000 pounds when loading material into the cart body.
3. Distribute the weight of the load as evenly as possible in the cart body for best handling.
4. When hauling heavy loads, verify that your vehicle has adequate towing and braking capacity.
5. Do not exceed 6 miles per hour when towing Dump Cart.



How to Empty Dump Cart:

1. Step down the foot pedal to release the latch mechanism.
2. Lift the body and swivel as desired to guide the material to preferred location.
3. Lift the body entirely and empty material.
4. Lower the body and guide the latch into the drawbar and relatch.



Periodic Maintenance:

- Tighten fasteners as needed before each use
- Check tire pressure before each use
- Grease wheels annually




Do-It-Yourself Accessories

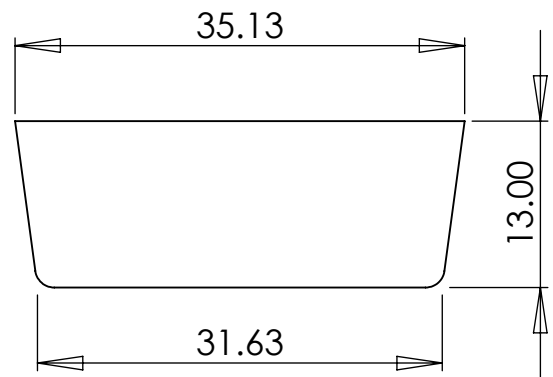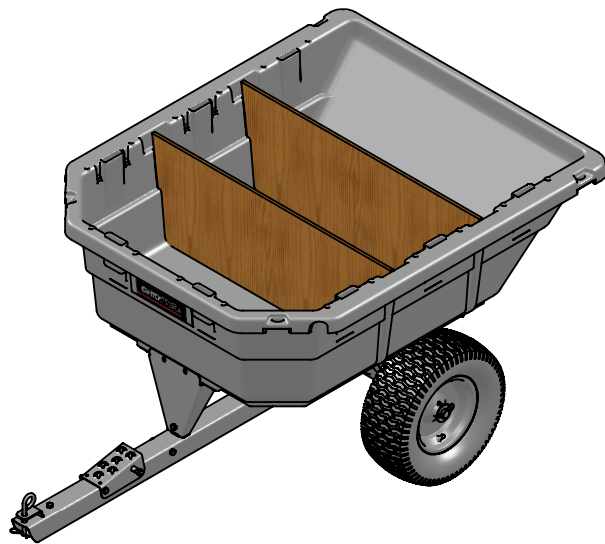

USE 1/2" PLYWOOD

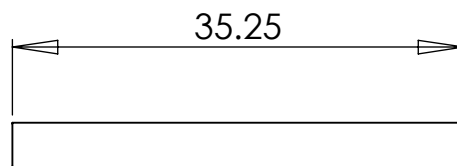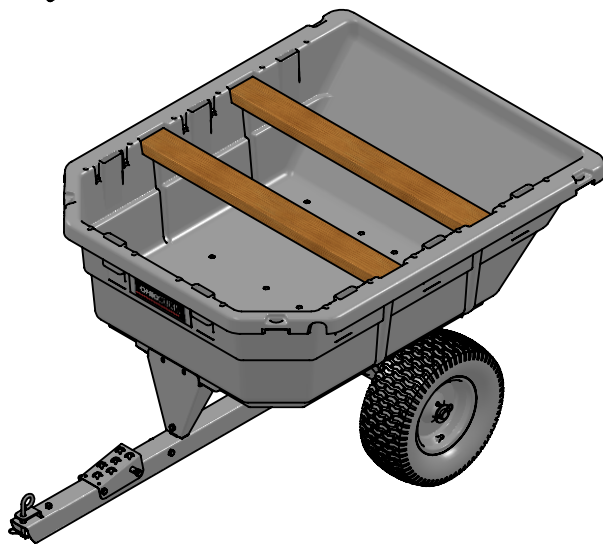

USE STANDARD 2 X 4

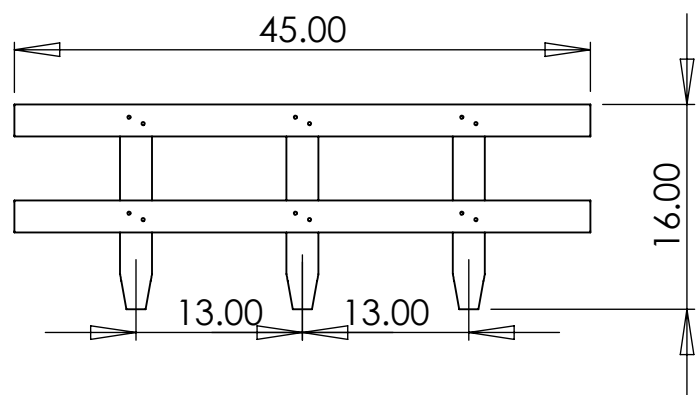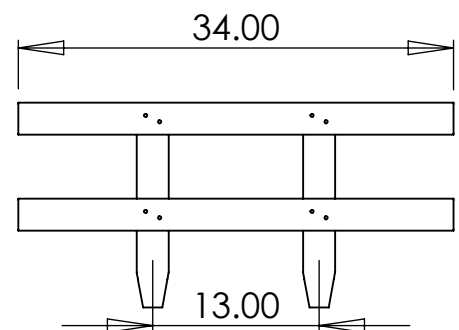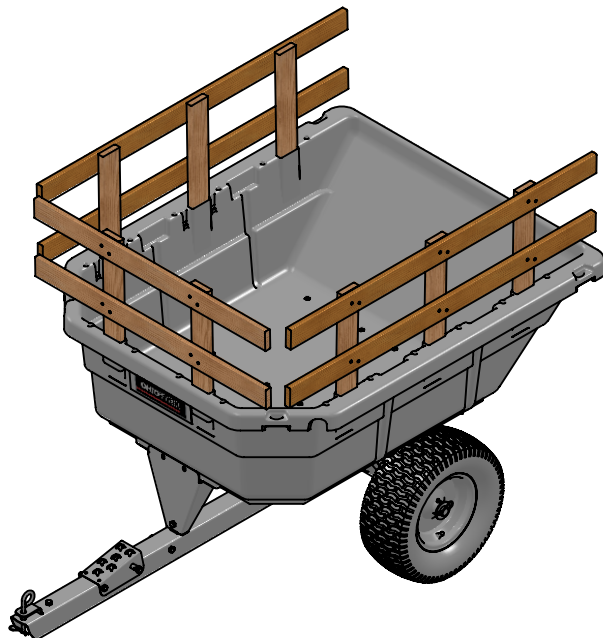

USE NOMINAL GRADE C 1 X 3

Warranty

If this product fails due to a defect in material or workmanship within **THREE YEARS** from the date of purchase, we will at our option repair or replace it free of charge. This warranty excludes tires and wheels which are expendable and become worn during normal use.

This warranty does not cover:

- Repairs necessary because of operator abuse or negligence.
- Equipment used for commercial or rental purposes.
- Paint that is worn or faded due to normal use or exposure.

To arrange for product repair visit **ohiosteel.com/partsstore** and fill out the warranty repair form. You can also call 1-800-652-2321 to speak to our Customer Service Team, or return this product to place of purchase for replacement.

This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state. This warranty applies only while this product is in use in the United States.

In the space below record the purchase date of your Lawn Sweeper.

Model Number **1000P-SD**

Purchase Date _____

Retailer/Dealer _____

Purchase Price _____

Keep this Owner's Manual and your receipt in a safe place for future reference. After the three year warranty period all replacement parts may be ordered at **ohiosteel.com/partsstore** or by calling **1-800-652-2321**.


When ordering replacement parts, always give the following information:

- Product **15 cu ft POLY SWIVEL DUMP CART**
- Model Number **1000P-SD**
- Part Number _____
- Part Description _____

EXPLODED VIEW

NOTE:

WHEELS IN MODEL
NOT SHOWN TO SCALE

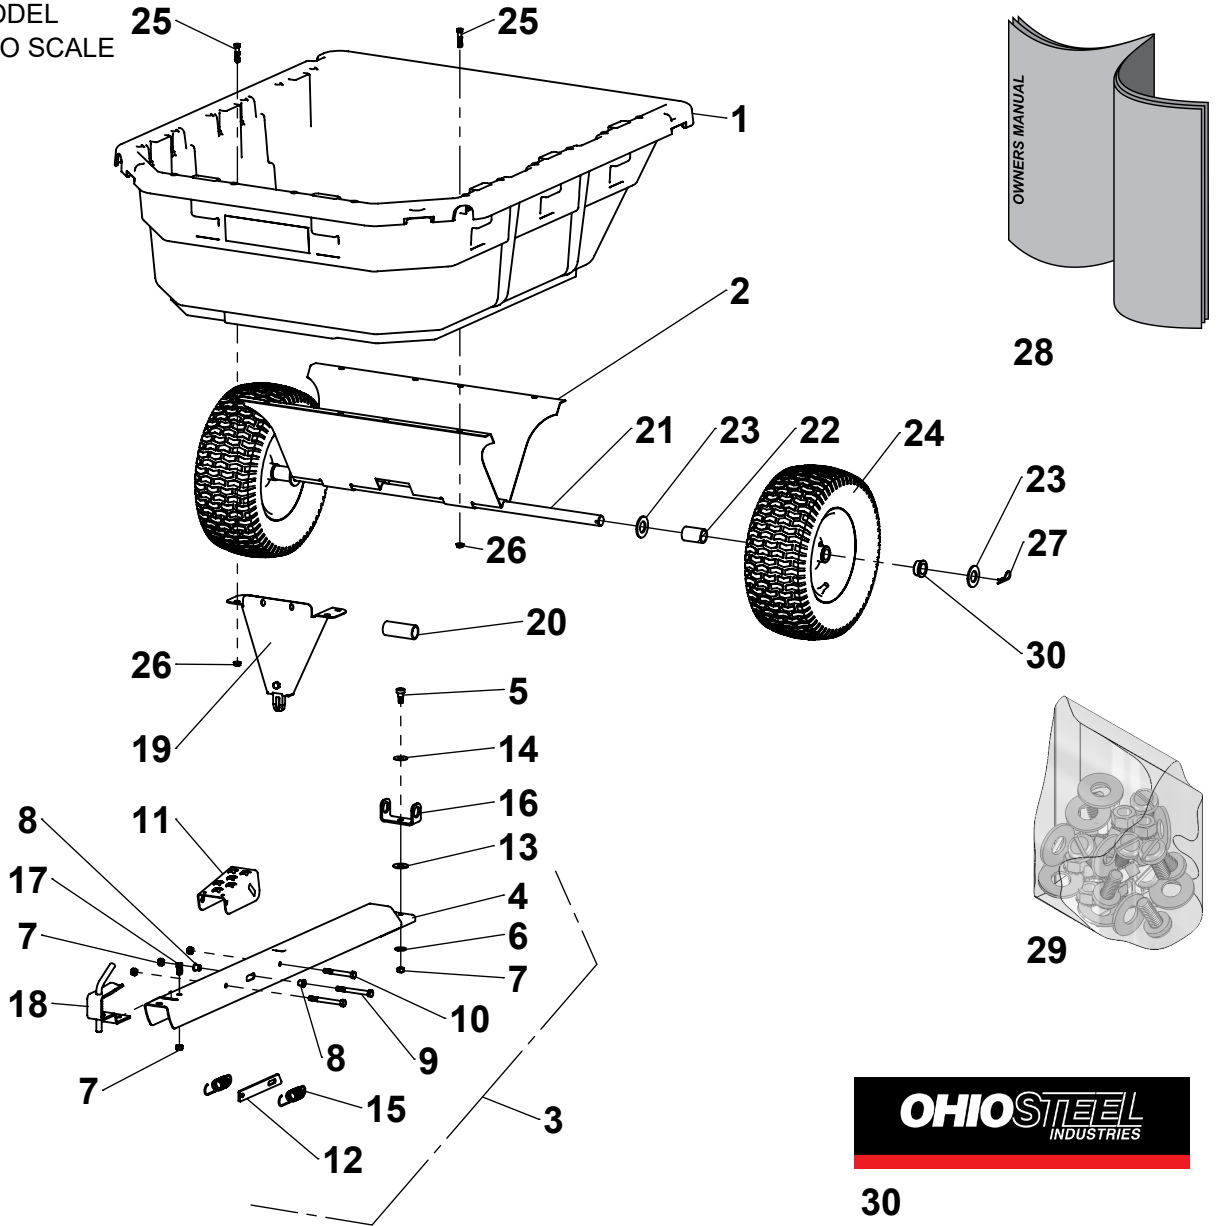

OHIOSTEEL
INDUSTRIES

30

ITEM	PART NO	DESCRIPTION	QTY	ITEM	PART NO	DESCRIPTION	QTY
1	311161	Poly Body	1	17	300052	3/8-16 x 3/4" Hex Bolt	1
2	6000404	Undercarriage	1	18	6000612	Spring Loaded Hitch Pin	1
3	6001663	Drawbar Assembly (incl 4-16)	1	19	6000310	Front Support	1
4	6000383	Welded Drawbar	1	20	6000463	3-1/8" Spacer	1
5	6000369	Shoulder Bolt	1	21	300002	Axle	1
6	3000720	3/8" USS Flat Washer	1	22	6000382	2" Spacer	2
7	300061	3/8-16 C-Lock Nut	5	23	300076	1" SAE Flat Washer	4
8	6000324	Bushing	2	24	6002415	Wheel	2
9	6000370	3/8-16 x 3-1/2" Hex Bolt	2	25	3000528	5/16-18 x 1-1/2" Hex Bolt	12
10	300055	3/8-16 x 3" Hex Bolt	1	26	6000419	5/16-18 Flange Lock Nut	12
11	6000305	Foot Pedal	1	27	300084	Hairpin Cotter, 2-5/16"	2
12	6000309	Latch	1	28	6004145	Owners Manual	1
13	300075	1/2" USS Washer	1	29	6001667	Hardware Bolt Bag	1
14	6000368	Spring Washer	1	30	6000695	Decal, Ohio Steel	1
15	6000325	Latch Spring	2				
16	6000312	Swivel Clevis	1				

REPAIR KITS

KIT	KIT NUMBER	PART NUMBER	PART DESCRIPTION	QTY
HARDWARE BOLT BAG	6001667	3000528	5/16-18 X1-1/2" HEX HEAD BOLT	12
		6000419	5/16-18 X1-1/2" SPINNER-GRIP NUT	12
		300076	1" SAE WASHER	4
		300084	HAIRPIN COTTER, 0.093" X 2-5/16"	2
		300052	3/8-16 X3/4" HEX BOLT	1
		300061	3/8-16 X3/4" C-LOCK NUT	1
		6000382	1" SPACER X 2"	2
		6000463	1" SPACER X 3-1/8"	1
1" WHEEL BUSHING KIT	6000810	6000808	1" WHEEL BUSHING	4
Drawbar Assembly	6001663	300055	HEX BOLT, 3/8-16 X 3-1/2"	1
		300061	HEX NUT, 3/8-16 C-LOCK	4
		300075	WASHER, 1/2" USS	1
		3000720	WASHER, 3/8" USS	1
		6000305	FOOT PEDAL	1
		6000309	LATCH	1
		6000312	CLEVIS, SWIVEL	1
		6000324	BEARING	2
		6000325	SPRING, LATCH	2
		6000368	WASHER, SPRING	1
		6000369	SHOULDER BOLT, 1/2" X 3/8"	1
		6000370	HEX BOLT, 3/8-16 X 3-1/2"	2
		6000383	WELDED DRAWBAR	1

Before you call...

Please email our customer service team at cs@ohiosteel.com with:

1. A description of the issue you are having
2. Photos of the issue that include an overall view and detailed view from multiple angles
3. If applicable, a short video showing the issue

If you believe this is a warranty related issue please see the warranty page in this manual

Replacement Parts:

If you are ordering replacement part(s) for your product, please note that some parts are only available as a repair kit.

1. First locate the part on the Exploded View page (page8)
2. Take note of the part number
3. If the part number is on the Repair Kits page, use the kit number to order your replacement parts
4. If the part number is not on the Repair Kits page, use the part number to order your replacement part

You can place your parts order online at ohiosteel.com/partsstore

You can also reach our Customer Service Department at 1-800-652-2321

OHIOSTEEL INDUSTRIES

Designed And Tested In Columbus, Ohio

Manufactured In The U.S.A. From Domestic
And Imported Components

PATENT #US 9242588

PATENT #US 8496298

MODEL # 1000P-SD



7 16504 10001 5

MODEL # 1000P-SD

2575 Ferris Road Columbus, OH 43224
(800) 652-2321

www.OHIOSTEEL.com

(800) 652-2321