

INSTRUCTION MANUAL



Outdoor Rocking Poly Adirondack Chair
SKU: 2001-RC

! NOTICE

Do not overtighten screws. (Insert all screws before tighten screws.)

- Please do not exceed the weight limitations of this item.
- Do not stand on or use any part of this item as a step ladder.
- Firmly secure all bolts, screws and nuts before use.
- Reconfirm that all bolts, screws, and nuts are secure every 90 days.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- Be aware that some parts are heavy and have sharp edges.
- Be very careful when folding chair to avoid smashing your hands or fingers.

TOOLS REQUIRED



ALLEN WRENCH
(PROVIDED)



WRENCH
(PROVIDED)



PHILLIPS SCREWDRIVER
(PROVIDED)



CHAIR
330 LBS
CAPACITY





1 PERSON
ASSEMBLY






UP TO 30 MIN.
ASSEMBLY






HARDWARE

1 M6 x 80mm SCREW  2 PCS	2 M6 x 50mm BOLT  8 PCS	3 M6 x 40mm SCREW  6 PCS	4 M6 x 40mm SCREW  4 PCS	5 M6 NUT  8 PCS
6 M6 WASHER  8 PCS	7 WRENCH  1 PC	8 ALLEN WRENCH  1 PC	9 PHILLIPS SCREWDRIVER  1 PC	

PARTS

A CHAIR SEAT  1 PC	B CHAIR BACKREST  1 PC	C LEFT CHAIR ARM  1 PC
---	---	--


PARTS



PRODUCT ASSEMBLY - OVERALL VIEW

1

Look at following overall view of this chair and learn the exact position of each parts to be assembled.

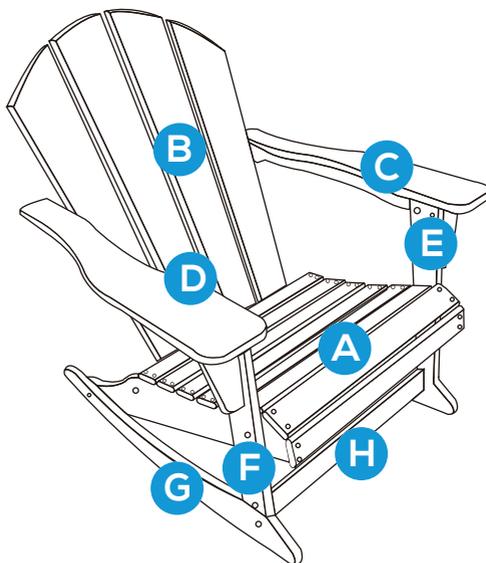


PRODUCT ASSEMBLY

1


Attach part C Left Chair Arm to part E Left Chair Leg with 1 PC of part 2 bolt and part 6 washer and part 5 Nut. Do same to part F Right Chair Leg and part D Right Chair Arm.

Do not tighten screws too much at this stage.

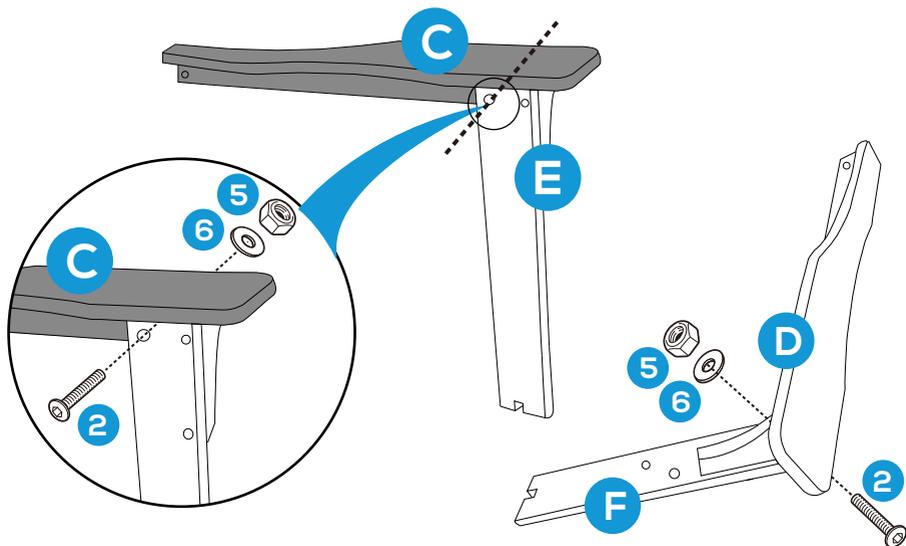

2


Attach part F right Chair Leg and part E Left Chair Leg to part A Chair Seat with 4 PCS of part 2 bolt and part 6 washer and part 5 Nut.

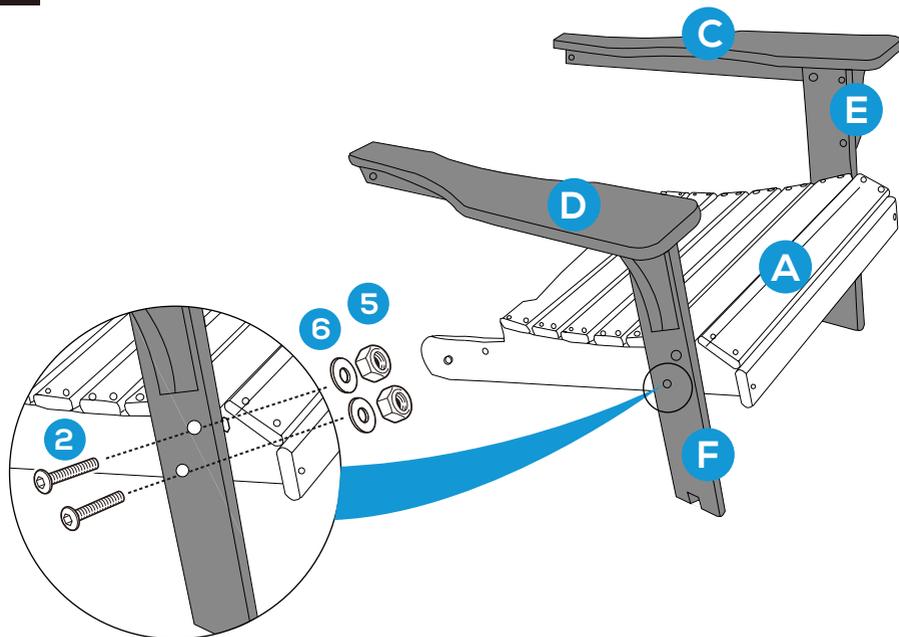

PRODUCT ASSEMBLY

3


Attach part F Backrest to part A Chair Seat and part D Right Chair Arm as well as part C Chair Left Arm with 2 PCS of part 1 Screw and 2 PCS of part 3 Screw.

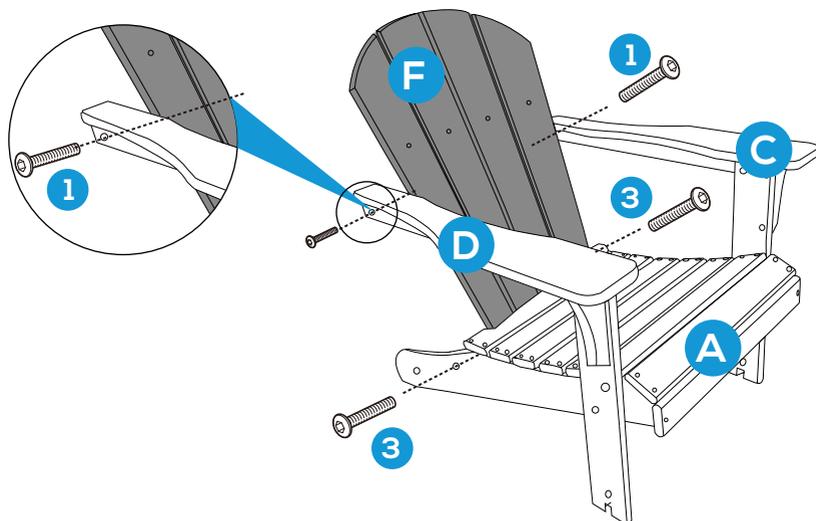

4

Turn the chair upside down and fix part G Rocking Base to part E Chair Left Leg and fix with 2 PCS of part 4 Screw using a phillips screwdriver. Attache the rocking base to part A Chair Seat with 1 PC of part 2 bolt and part 6 washer and part 5 nut.

Do the same to the other Rocking base.

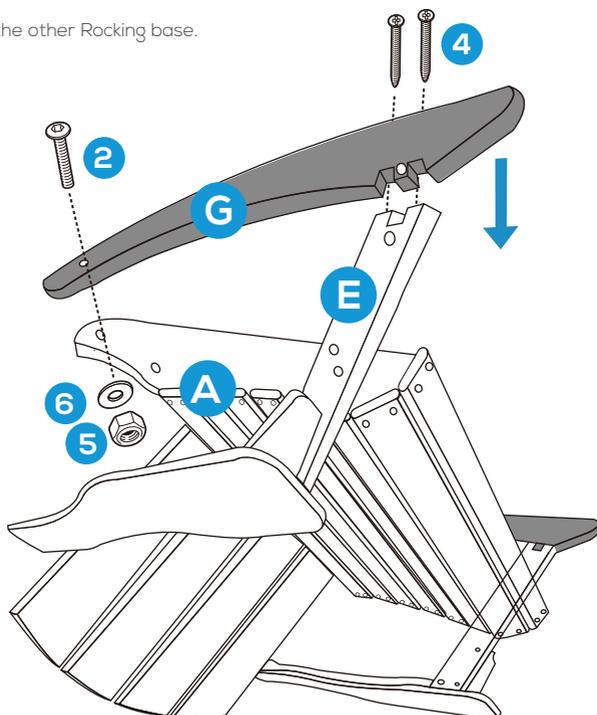


PRODUCT ASSEMBLY

5

Attach part H Front rail with part G Rocking base to part G Rocking base and part E Left Chair Leg with 2 PCS of part 3 screw.

Do the same to the right side to finish the assembly.

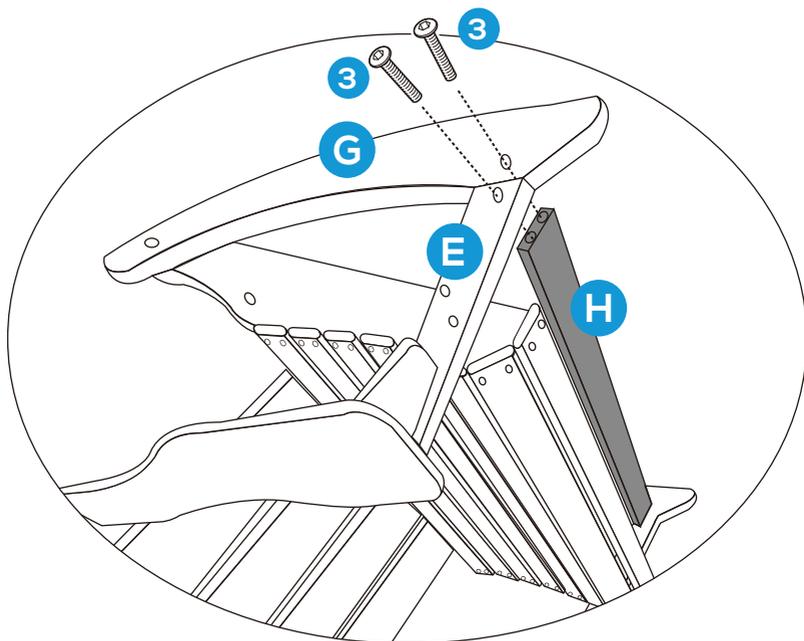

Tighten all the screws and bolt connections to ensure a steady use of this chair.

