

MEMOIRS_®

Features

- Brass construction
- Brass valve bodies
- · Quarter-turn washerless ceramic disc valves
- Flexible connections for easy installation
- Pop-up drain with lift rod and tailpiece
- Cross or lever handles
- 5" (12.7 cm) spout reach
- Stationary spout
- For 8" (20.3 cm) or 16" (40.6 cm) centers
- 1.5 gallons (5.7 liters) per minute maximum flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- NSF 61
- Energy Policy Act of 1992
- EPA WaterSense®
- All applicable US Federal and State material regulations

WIDESPREAD LAVATORY FAUCET K-454





Colors/Finishes

- · CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

NA: None applicable

Specified Model

Model	Description	CI	assic Cross	S	tately Cross
K-454-3C	Widespread lavatory faucet	☐ CP	□ Other		
K-454-3S	Widespread lavatory faucet			□ CP	☐ Other

Product Specification


The two-handle widespread lavatory faucet shall be made of brass construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves, flexible connections for easy installation, a 5" (12.7 cm) spout reach, stationary spout, cross or lever handles, and a pop-up drain with lift rod and tailpiece. Product shall be for 8" (20.3 cm) or 16" (40.6 cm) centers. Faucet shall be Kohler Model K-454-_____.

MEMOIRS_®

Model	Descrip	Description		Classic Lever		Stately Faceted Lever		Stately Deco Lever			
K-454-4C	Widesp	read lavatory faucet	□ CP	☐ Other			•				
K-454-4S	Widesp	read lavatory faucet			□ CP □ Other						
K-454-4V	Widesp	read lavatory faucet				□СР	□ Other				
Optional Accessories											
40003		Wrench for long-stemme	d ceramic	eramic valve bodies				□NA			
Additional flow aerator options are available (refer to the Kohler Price Book)							□ NA				

Installation Notes

Install this product according to the installation guide.

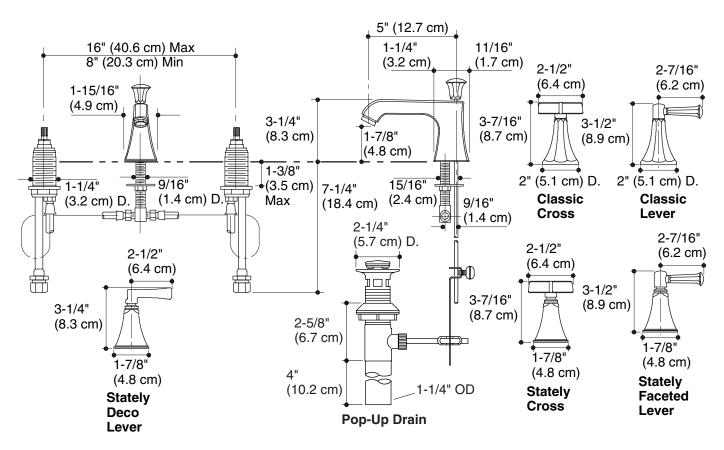

Product Diagram

