

と BARRIER FREE

PRINCETONTM RECESS BATH AMERICAST® BRAND ENGINEERED MATERIAL

PRINCETON™ RECESS BATH

Americast® brand engineered material

- ☐ 2391.202 Right Hand Outlet
- ☐ 2391.202TC Same as above w/tub cover
- ☐ 2390.202 Left Hand Outlet
- ☐ 2390.202TC Same as above w/tub cover
 - · Acid resistant porcelain finish
 - · Recess bath with integral apron and tiling flange
 - Integral lumbar support
 - Beveled headrest
 - Full slip-resistant coverage
 - End drain outlet



PRINCETON™ RECESS BATH for Above Floor Rough Installation

- ☐ 2392.202 Left Hand Outlet for above floor installation
- ☐ 2392.202TC Same as above w/tub cover
- ☐ 2393.202 Right Hand Outlet for above floor installation
- ☐ 2393.202TC Same as above w/tub cover

Nominal Dimensions:

1524 x 762 x 356mm (445mm for above floor installation) 60" x 30" x 14" (17-1/2" for above floor installation)

Bathing Well Dimensions:

1423 x 635 x 337mm (56" x 25" x 13-1/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.4 for Americast Plumbing Fixtures
- ASTM F-462 for Slip-resistant Bathing Facilities
- ANSI Z124.1 Ignition Test
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

Americast® brand engineered material is a composition of porcelain bonded to enameling grade metal, bonded to a patented structural composite.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES. INSTALL WITH SEAT AT HEAD END.

SEE REVERSE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

To Be Specified - Required:


- ☐ Color:
- Bath Faucet*:
- ☐ Faucet Finish:
- Drain:
- ☐ Drain Finish:

^{*}See faucet section for additional models available



PRINCETONTM RECESS BATH AMERICAST® BRAND ENGINEERED MATERIAL

NOTE: Roughing-in shown for 2390/2391 only. Refer to installation instruction for 2392/2393 above floor installation.

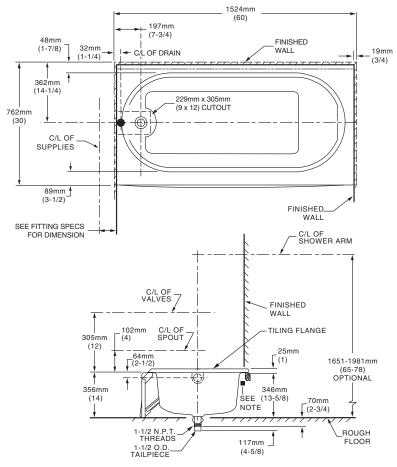

GENERAL SPECIFICATIONS FOR 2390/2391 BATHING POOL	
INSTALLED SIZE 60 x 30	x 14 In. (1524 x 762 x 356mm)
WEIGHT	110 Lbs. (50 Kg.)
WEIGHT w/WATER	460 Lbs. (209 Kg.)
GAL. TO OVERFLOW	42 Gal. (159 L)
BATHING WELL AT SUMP	42 x 19 ln. (1067 x 483mm)
BATHING WELL AT RIM	56 x 25 ln. (1423 x 635mm)
WATER DEPTH TO OVERFLOW	
FLOOR LOADING	.37 Lbs./Sq.Ft. (175 Kgs./Sq.m)
(PROJECTED AREA)	
PTS	6.2
CUBE (FT ³)	18.1

Below is shown typical cross sections of the tub rim showing typical wall constructions.

WOOD STUDS STEEL STUDS STUD STEEL SHIM STUD SHIM DRY WALL TILE DRY WALL ROOFING NAIL TILE SEALANT SEALANT 4" (102mm -DRYWALL SCREW TUB 51 x 102mm (2 x 4) WOOD

STRINGER FULL LENGTH

GENERAL SPECIFICATIONS FOR 2392/2393 BATHING POOL INSTALLED SIZE 60 x 30 x 17-1/2 In. (1524 x 762 x 445mm) WEIGHT. 119 Lbs. (54 Kg.) WEIGHT w/WATER _ GAL. TO OVERFLOW 469 Lbs. (213 Kg.) 42 Gal. (159 L) BATHING WELL AT SUMP 42 x 19 ln. (1067 x 483mm) 56 x 25 In. (1423 x 635mm) BATHING WELL AT RIM WATER DEPTH TO OVERFLOW -_ 9-1/2 In. (241mm) FLOOR LOADING 38 Lbs./Sq.Ft. (182 Kgs./Sq.m) (PROJECTED AREA) PTS. CUBE (FT³) 21.2

NOTES:

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS. (2391.202).

SHOWN WITH POP-UP C.D. & O.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH FITTING.

CONCEALED PIPING NOT FURNISHED.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

lacksquare REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.4 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.