
GET TO KNOW YOUR BREWER


BUNN VELOCITY BREW

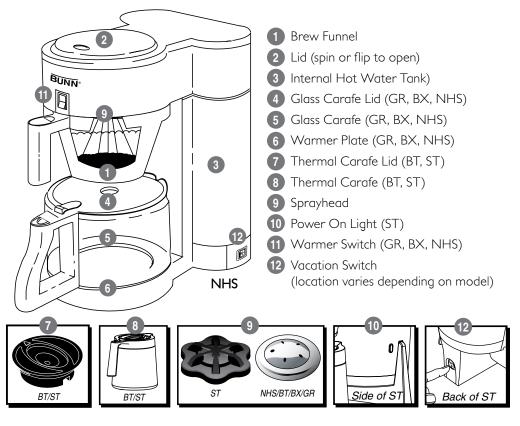

SPECIFICATIONS

ELECTRICAL: UL and C-UL Listed for Household Use Only. Brewer has an attached, 3-prong grounded cord set and requires 2-wire service with ground, rated 120 volts AC.

- NHS: 7.9 amps, single phase, 60 Hz. 947-watts total.
- **ST:** 7 amps, single phase, 60 Hz. 850-watts total.
- **BX:** 7 amps, single phase, 60 Hz. 900-watts total.
- **GR:** 7.5 amps, single phase, 60 Hz. 900-watts total.
- **BT:** 7.5 amps, single phase, 60 Hz. 850-watts total.

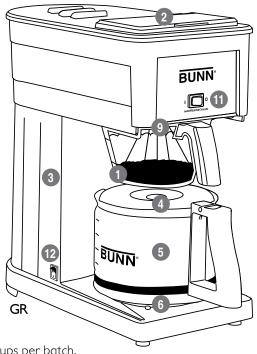

BREW CAPACITY: 4 to 10 five ounce (5 oz.) cups per batch.

HIGH ALTITUDE USE: Water boils at a lower temperature in high altitude environments (over 4,000 feet). At high altitude, use a model with "D" designation as the thermostat has been preset for these environments.

The BUNN logo is a trademark of Bunn-O-Matic Corporation. 43097.0002D 10/12 © 2011 BUNN-O-MATIC CORPORATION