

PureVue™ LED Puck Light

Architectural quality, component-based LED lighting system

Practical configuration, easy to install

PureVue LED lights can be a surface-mounted puck or a sleek recessed down light. High quality all metal construction, each fixture comes prewired with a 36 in. color-coded power lead for easy direct wire connections. Low voltage safe, simply cut or extend cables to meet any installation need. Lights can be installed individually, linked together, or combined with Armcast LED tape lighting in the same circuit. The number of lights installed is limited only by the output rating of the power supply.

Ultra bright chip-on-board (COB) LED array technology

PureVue Lights are made with Cree® High Power XLamp® COB LEDs and consume only 4 watts at full brightness to produce about 320 lumens of light. Performance is equivalent to a conventional 35- to 40-watt halogen bulb.

PureVue diffusing technology reduces glare to deliver smooth consistent light output with no visible LED chips or bright spots.

Fully dimmable

Enjoy smooth, soft-start and fade-to-dark professional dimming with any standard, in-wall AC dimmer when PureVue lights are used with Armcast Lighting's Universal Dimming LED drivers. PureVue lights are also compatible with Armcast Lighting's line of 12-volt Wireless, WiFi, and Slimline Touch Dimmers. Wireless dimming controls can eliminate the need to run wires from the LED lighting to the remote dimmer location, useful in situations where installing new cabling can be difficult. Visit armcastlighting.com/dimming to learn more about your dimming options.

Requires a 12V DC power supply. Each LED light uses about 4 watts. Choose an adequately rated power supply based on the number of installed lights.

IMPORTANT

**CAUTION: For use only with low voltage 12V DC power source.
Do not connect to 120V AC current.
For dry location only.**


Disconnect all power before installing.

Wire runs inside walls must be installed in accordance with national and local electrical codes, low voltage Class 2 circuit. Use properly certified CL2 or better cabling. Do not install low-voltage wiring in the same wire run as AC power. If AC and low-voltage wires cross, keep them at 90-degree angles. If you are unclear as to how to install and wire this device, contact a qualified electrician.

- Use only insulated staples, plastic ties or clips to secure wires.
- Route and secure wires so they will not be pinched or damaged.
- Failure to observe polarity or shorting of wires may damage the LED lights.

Works with other Armcast component-based lighting

Lights can be linked together or combined in the same 12V low voltage circuit with other Armcast lighting products, including white RibbonFlex Pro® LED tape lighting and 1 watt mini lights.

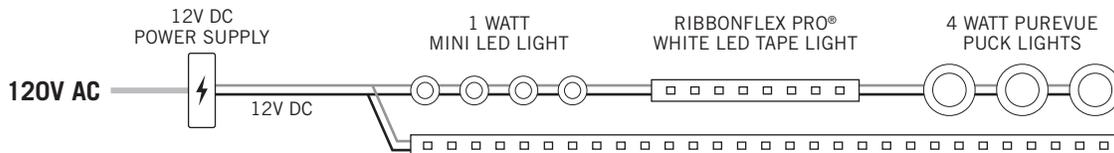

SPECIFICATIONS

Input Voltage.....	12V DC
Power Consumption	~4W
Color Temperature.....	~2700K
Light Output (Lumens).....	320
Lumens per Watt (Efficacy).....	80
Color Accuracy (CRI).....	.80+
LED: Cree® XLamp® CXA1304	COB
Beam Angle	120

Limited 3-year warranty. This product is for dry location use only. Improper installation, improper powering, abuse, or failure to use this product for its intended purpose will void warranty. Proof of purchase is required for all returns. Questions? Email support@armcastlighting.com.



armcastlighting.com

© 2013-16 Armcast Lighting. All rights reserved.

160104

INSTALLATION GUIDELINES

First, remove trim ring by grasping ring and then firmly pushing on back side of LED light.


Flush mount

Cut a 2-1/8 in. diameter hole at desired location and insert light. Tension clips will hold the light in place. No trim ring required.



Surface mount

Keeping power cable threaded through trim ring, install ring using screws. Insert light into trim ring until secure.

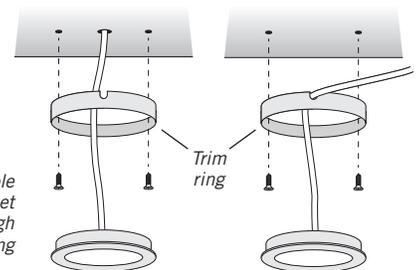


Feed power cable through cabinet surface or through notch in trim ring

Typical connection

Simply connect LED lights to the low voltage output of your 12V DC power supply as shown. Always maintain polarity, red (+) to red, black (-) to black. Splice and extend power lead cables to meet installation needs. For RV and boat applications, power the lighting directly by 12V battery.

Be sure to use a 12V DC power supply with sufficient wattage to power the total number of LED lights connected to your system. At 100% brightness, each LED light uses about 4 watts or 0.33 amps.

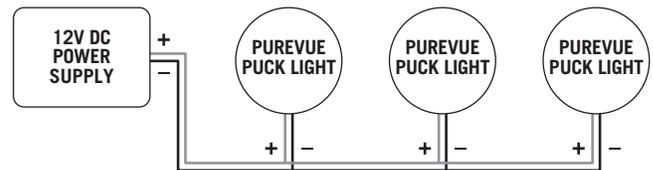

On very large, multi-LED light installations, be aware of possible voltage drop, which only becomes undesirable if you notice the brightness in one area of your lighting is objectionably different than in another area. Do not coil wire; shorter lengths and thicker wire will mean less voltage drop and higher brightness. For an online voltage drop calculator, visit armcastlighting.com/voltagedrop.

Planning for a dimmer

Use only Armcast Lighting LED dimmers or an Armcast AC to DC dimmable LED power supply with a compatible Lutron® or similar style in-wall AC dimmer. Be sure to visit armcastlighting.com/dimming to learn about the types of dimmers that will work with Armcast LED lighting and power supplies.