



SPECIFICATIONS

COS-KS6U30 Range Hood



Size	30 Inch
Mounting Type	Under Cabinet
Controls	Soft Touch with LCD Display, Remote
Filters	3 x Stainless Steel Baffle Filters
Material	430 Grade Stainless Steel
Air Flow	500 CFM
Noise Level	45 dB*
Vent Style	External
Lighting	2 x Front LED
Voltage	110V / 60Hz
Wattage	241W
Included Components	Bulb(s), Damper, Exhaust Vent, Fan Hardware, Installation Kit, Power Cord, Wireless Remote

COS-KS6U30

Presenting this modern range hood, Cosmo's COS-KS6U30 is powered by 500 CFM of suction, 2 LED lights and ARC-FLOW® Stainless Steel Permanent Filters.



3 Fan Speeds




Soft Touch Controls



LED Lighting

Features

- Designed for under cabinet mounting
- 3 fan speeds
- 500 CFM airflow capacity
- Soft touch controls with LCD display and remote
- ARC-FLOW® Permanent Filters
- 2 front LED lights
- Noise level as low as 45 dB*
- Top or back vented

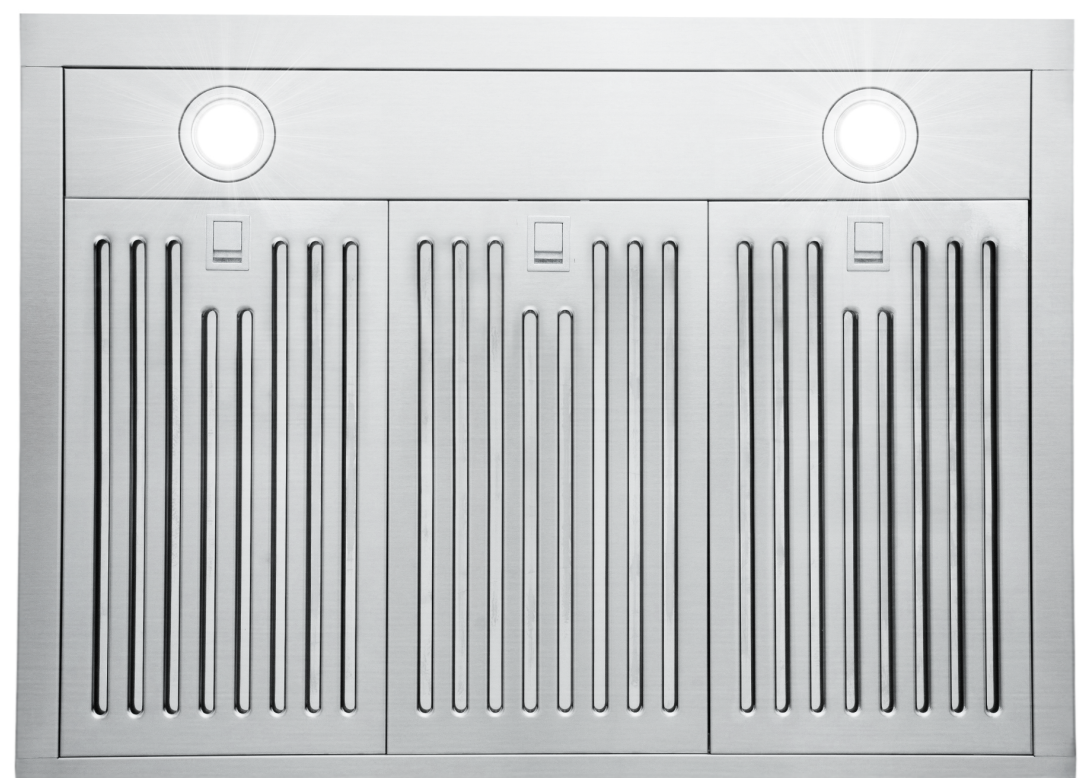

See Page 2 for dimensions


For more information, please visit: www.cosmoappliances.com

* Noise level as low as 45 dB on lowest fan speed with rigid ducting (sold separately) under optimal conditions



DIMENSIONS

COS-KS6U30 Range Hood

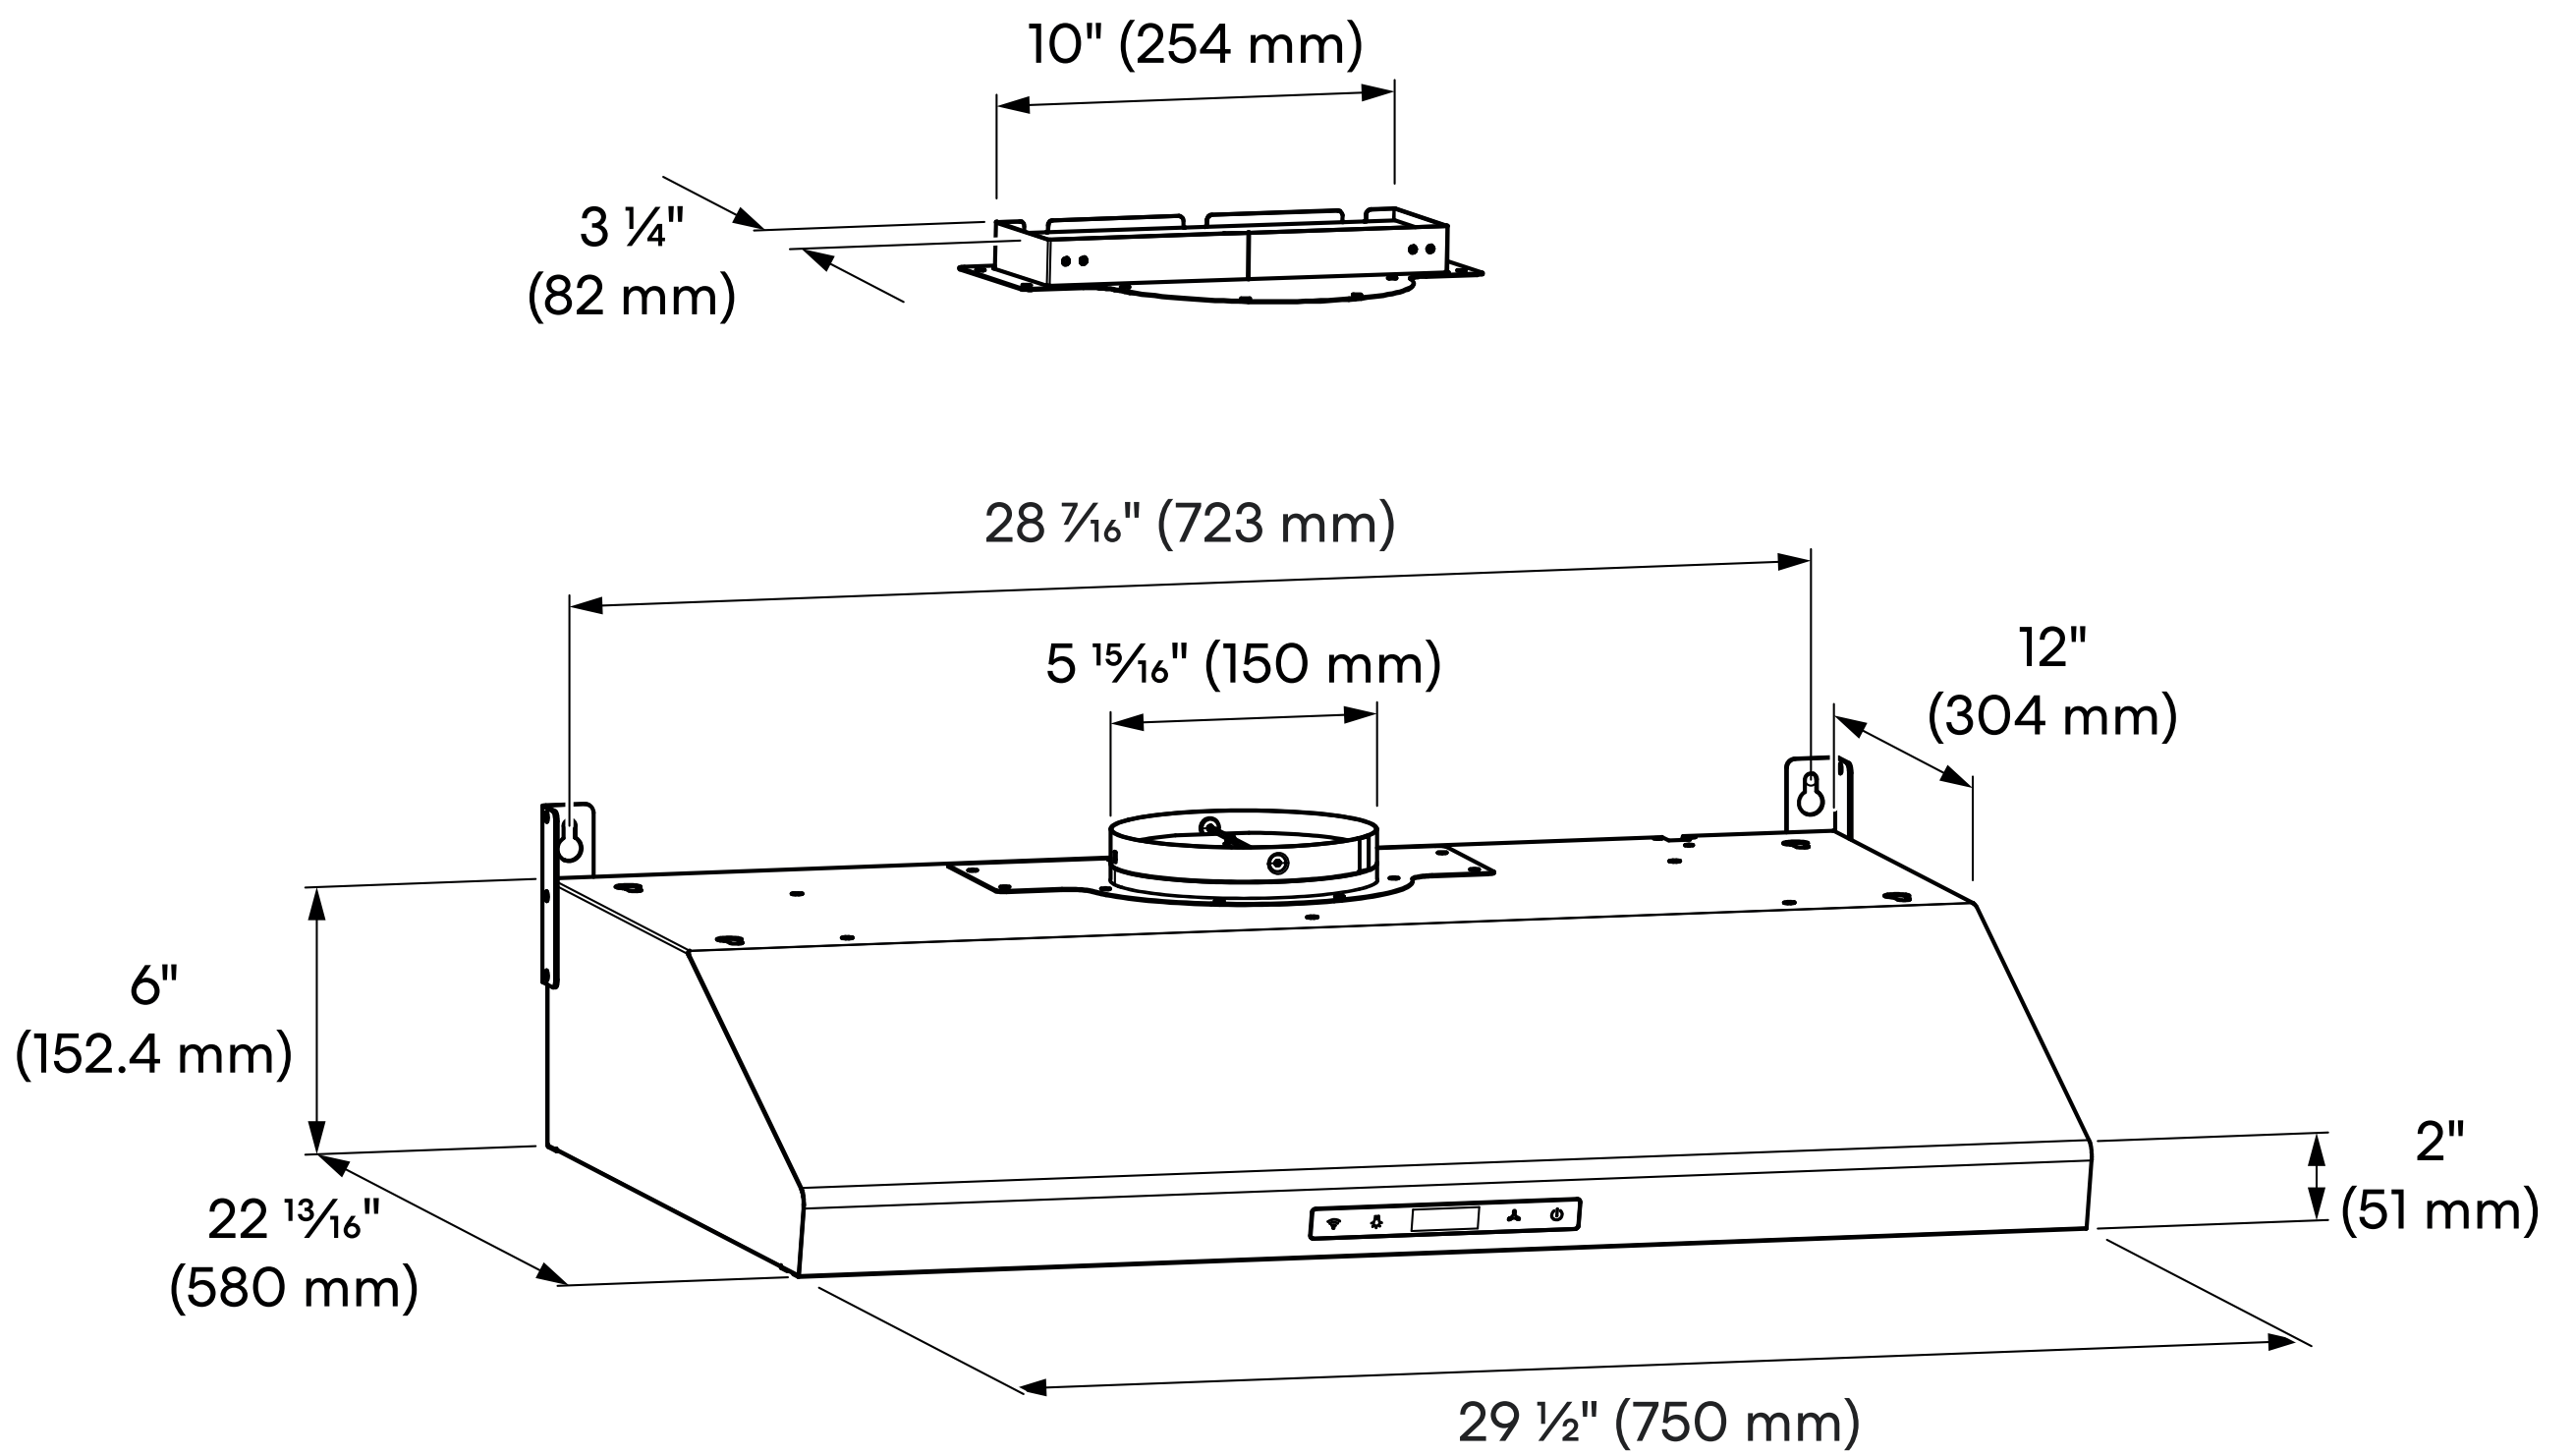

Dimensions (WxDxH): 29.5" x 22.8" x 6"