

Features

- Advanced spray engine provides three spray options: powerful massage, intense drenching and wide coverage.
- Powerful massage is a focused stream for massaging sore muscles or for use as a utility spray.
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair.
- Wide coverage spray produces an encompassing spray for everyday use.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Single-lever handle allows for simultaneous on/off activation and temperature control.
- 1.75 gpm (6.6 lpm) maximum flow rate at 45 psi (3.1 bar).
- Box includes: Showerhead, shower arm and flange, faceplate with lever handle, diverter spout with 1/2" NPT or slip-fit connection, and Rite-Temp® pressure-balancing valve with universal 1/2" NPT male connections.

Material

- KOHLER finishes featuring ScratchShield® technology withstand even the toughest daily use (Brushed Nickel finish only).
- Spot Repel™ finish resists fingerprints, smudges, and water spots (Oil-Rubbed Bronze finish only).

Technology

- Rite-Temp® pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit for anti-scalding protection and precise temperature control.

Water Conservation & Rebates


- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

Adapters, Rough-in and Extension Kits

1429241 Range: 1-5/16" (33 mm) - 2-1/16" (52 mm)

Recommended Products/Accessories

K-23723 Faucet cleaner

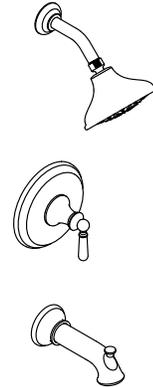

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze
	BL	Matte Black

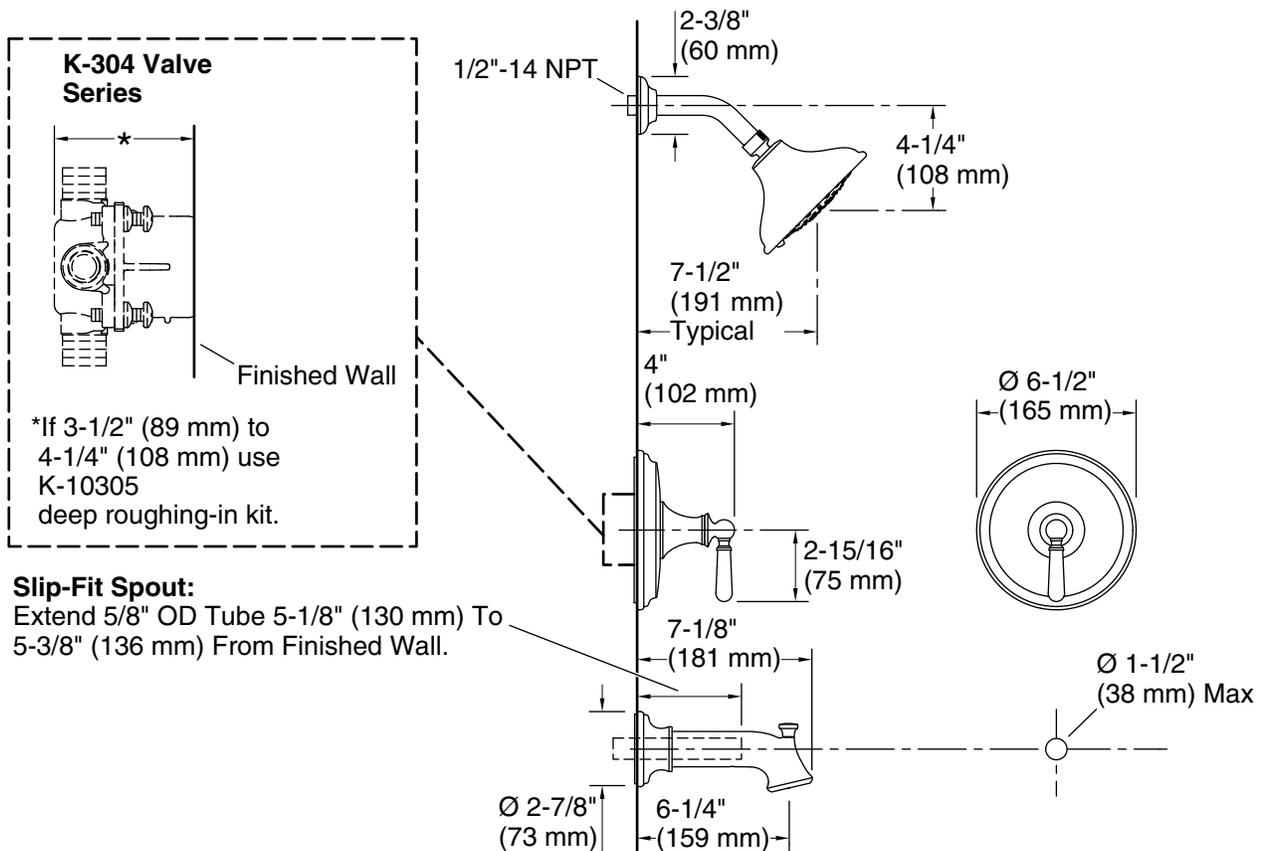

Technical Information

All product dimensions are nominal.

Drain included: No

Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 20 psi (1.4 bar)

Fixture pressure max 120 psi (827.4 kPa)
(static):

Pressure and Supply Requirements

Fixture pressure min 10 psi (68.9 kPa)
(static):

Fixture Supply Requirements

Min static pressure: 10 psi (68.9 kPa)

Max static pressure: 120 psi (827.4 kPa)

Min flowing pressure: 10 psi (68.9 kPa)

Min flow rate: 2.5 gpm (9.5 lpm)

Notes

For use with automatic compensating valves rated at 1.05 gal/min (4 l/min) or less.

Install this product according to the installation instructions.