

PERFORMANCE[®]



The new degree of comfort.[®]

PERFORMANCE[®] Point-of-Use electric water heaters feature a space-saving design for installation in limited spaces

Efficiency

- .90 UEF for 30-gallon model
- Single restored copper heating element

Features

- Upper heating element
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Wall bracket for easy wall mount installations and corrosion resistant 1/4 turn drain valve included with 2.5 gallon model

Plus...

- Temperature and pressure relief valve
- Meets or exceeds National Appliance Energy Conservation Act (NAECA) requirements

- These units are U.L. listed and comply with Underwriter's Laboratories Specifications 174
- Low lead compliant

Warranty

- 6-Year limited warranty for tank and parts, 1-year full in-home labor warranty*

*See written warranty for complete details

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.




2.5-Gallon



6, 10, 20 and 30-Gallon

PERFORMANCE Point-of-Use 2.5, 6, 10, 20 and 30-Gallon Capacities 120 Volt AC

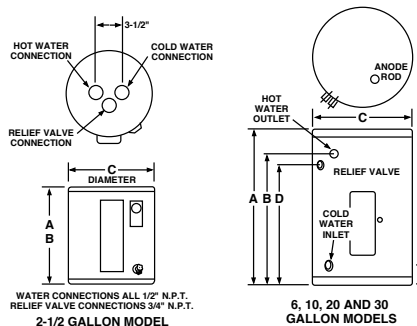

PERFORMANCE[®] Electric Point-of-Use Specifications

Fuel Type	Description	Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Tank Height A	Height to Hot Water Outlet B	Diameter C	Height to Side T&P Valve D	Height to Cold water Inlet E	Element Wattage	Ship Weight (LBS.)	First Hour Rating (Gallons)	Uniform Energy Factor (UEF)
Electric	POU	30	27	XE30P06PU20U1	32	23-1/8	22-1/4	23	2-3/4	2000	91	28	0.90
Electric	POU	20	N/A	XE20P06PU20U0	25-1/4	22-3/4	19-3/4	21-3/4	5	2000	70	N/A	N/A
Electric	POU	10	N/A	XE10P06PU20U0	23	20-1/2	15-3/4	19-1/2	4-1/4	2000	46	N/A	N/A
Electric	POU	6	N/A	XE06P06PU20U0	15-1/4	12-1/2	15-3/4	11-1/2	4-1/4	2000	37	N/A	N/A
Electric	POU	2.5	N/A	XE02P06PU14U0	14	14	9-3/4	-	-	1440	22	N/A	N/A

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

- **2.5 gallon model:** 1/2" N.P.T. inlet and outlet. Relief valve connection 3/4". Available with 120 volt AC single phase only, 120v (1440w) Power cord supplied with 2.5 gallon models.
- **6 through 30 gallon models:** 3/4" N.P.T. outlet, inlet, anode rod. T&P valve connections. Water heaters furnished standard with 120 volt AC, 2000 watt single element.

CONSTRUCTION DETAILS: The cold water enters the tank a few inches from the bottom. Both hot and cold water lines may be connected directly to the water heater without special nipples or tees.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076 • www.rheem.com