



Tresham®

Comfort Height® Toilet

K-3981

Features

- Vitreous china
- Compact elongated bowl
- Comfort Height®
- AquaPiston® flushing system
- Includes Glenbury™ Q3 seat, cover [K-4733] and left-hand polished chrome trip lever
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- Skirted trapway
- 2 1/8" (54 mm) plastic trapway

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing
- AquaPiston® canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance
- Durable canister design has 90% less exposed seal material than a 3" flapper, for leak-free performance
- Light-touch canister flush requires a lower actuation force than a flapper

Installation

- Standard 12" rough-in

Water Conservation & Rebates

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6 gpf toilets
- Eligible for consumer rebates in some municipalities

Optional Accessories

K-5383 10" Rough-in Full Skirt Trap and Attachment System
K-5381 14" Rough-in Full Skirt Trap and Attachment System



For complete listing of available colors, go to kohler.com.



Codes/Standards


ASME A112.19.2/CSA B45.1
DOE - Energy Policy Act 1992
EPA WaterSense®

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Product Specification

Toilet shall be 28-1/4" (718 mm) in length, 17-5/16" (440 mm) in width, and 28-1/2" (724 mm) in height. Toilet shall be made of vitreous china. Toilet shall be one-piece. Toilet shall be skirted. Toilet shall be 1.28 gpf (4.8 lpf). Toilet shall be left-hand trip lever. Toilet shall be AquaPiston® flushing system. Toilet shall be 12" (305 mm) rough-in. Toilet shall be Kohler Model K-3981.

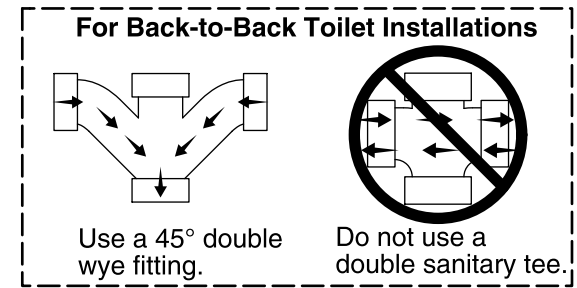

Toilet style:	One-piece
Bowl shape:	Compact Elongated front
Seat hinge type:	Quick-Attach®, Quiet-Close™, Quick-Release™
Passageway:	2-1/8" (54 mm)
Flush rate - full:	1.28 gpf (4.8 lpf)
Water area:	9-5/8" x 6-7/8" (245 mm x 174 mm)
Rim to water height:	5-3/8" (137 mm)
Rough-in:	12" (305 mm)
Seat hole centers:	5-1/2" (140 mm)

Install this product according to the installation guide.

For back-to-back toilet installations: Use only a 45° double wye fitting.