



1.) To installing NetLock® Locking Red Insert

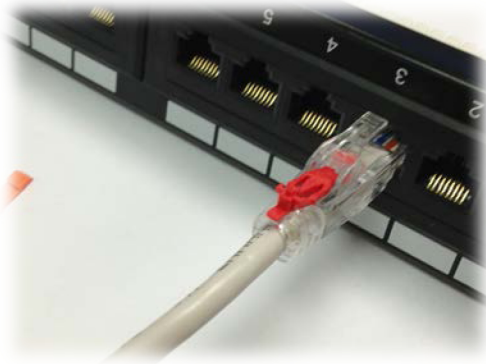

*Start with plugging in the NetLock® Patch Cord into desire port of RJ45.*

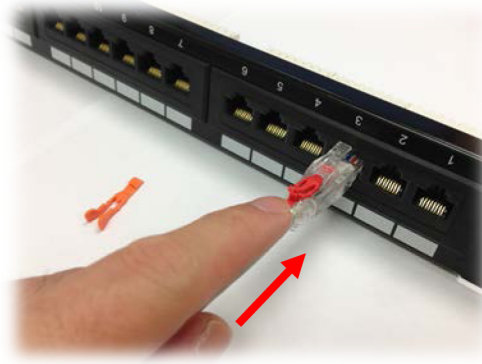

*Fully push in the red insert into lock position.*




*In locking position, now you will not able to remove the insert or the patch cord.*


2.) To remove NetLock® Locking Red Insert



*Insert NetLock® removal tool to the back of the red insert, you should hear a click while tool is in position.*

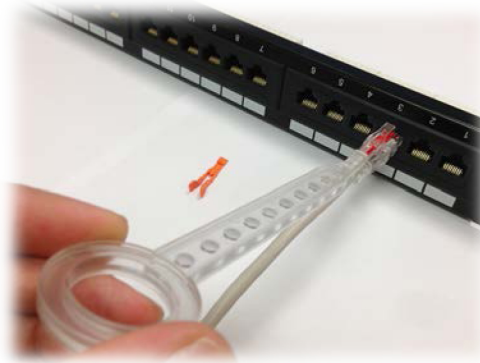

*Pull back the removal tool, Red locking insert will pull back along the removal tool.*

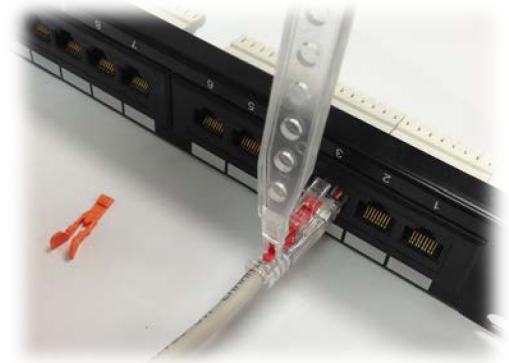

*Lift the removal by 90 degree to disengage the removal tool. Now you can easily remove the NetLock® patch cord.*