

# SPEX

LIGHTING CO.



## 4" MULTI Recessed Light, Color Selectable



### Features

- Converts a standard Octagon Box or 4" recessed housing into a recessed downlight
- 5-Position CCT selectable switch
- Interchangeable magnetic trims included
- Fire rated when used in a fire-rated Octagon Box.
- Suitable for wet locations
- Ideal for residential and light commercial spaces

### Technical Drawings

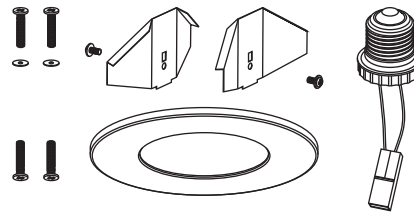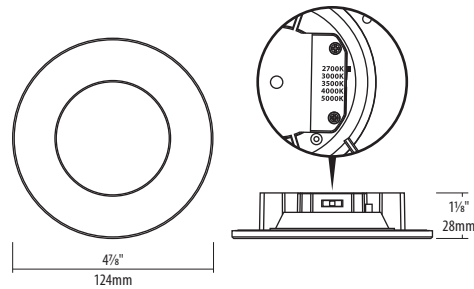

TECHNICAL DATA	
Application	Ceiling Recess Mount
Approved Location	Wet / Fire-rated (when installed in fire-rated octagon box)
Beam Angle	110°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K (via CCT switch)
Certification	cETLus
Color	Black / Silver / White (all included)
CRI	90
Dimming	Yes
Dimming Technology	Forward/Reverse phase / TRIAC / ELV
Input	100-135V AC, 60 Hz
LM79	Yes
LM80	Yes
Lumens	Up to 560
Lumens per Watt	Up to 70
Power Factor	>0.9
Projected Life	70% @ 50,000 hours
Title 24	JA8 (up to 4000 K)
Warranty	Lifetime
Wattage	8W

**Notes:** Due to our continued efforts to improve our products, product specifications are subject to change without notice.

A division of  
Une division de

**LITELINE CORPORATION**  
P 416-996-1856 | 1-866-730-7704  
F 905-709-5255 | 1-888-738-9736

**SPEXLIGHTING.COM**

Copyright © 2021, Liteline Corporation. All rights reserved.  
REV 1.15.21

## Specifications

---

### Body

Durable airtight plastic body with mounting holes and included butterfly clips. On-face magnets allows for securely attaching one of three included dead front magnetic faceplates (White, Black and Silver).

### LED Characteristics

This general application light fixture features an 8 watt LED module that maintains uniform intensity producing up to 560 lumens; with a typical CRI of 90. Available with 5 step CCT switch (2700 K, 3000 K, 3500 K, 4000 K, 5000 K).

### Dimming

100%-10% dimming capability. This fixture is compatible with industry standard forward/reverse-phase dimmers and TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

### Beam Spread

The fixture lens provides 110° beam spread.

### Mounting

Can be mounted to a compatible 4" recessed housing via included butterfly clips, or attached to an industry standard 4" octagon box with minimum depth of 1.5" (40mm) via mounting holes.

### LED Driver

Built-in on board driver with 40mA output and 100-135V AC input.

### Quick Connect Push-in Terminals

Three "Quick Connect" push-in terminals on the fixture for fast and easy wiring.

### Minimum Starting Temperature

-30°C (-22°F)

### Environment

- Suitable for wet locations.
- Fire-rated when used in a fire-rated octagon box.

## Models

---

### SL-MULTI4-8W

4" MULTI recessed light, 8W, 3 interchangeable magnetic trim included.

### SL-MULTI4-8W-4

4" MULTI recessed light, 8W, 3 interchangeable magnetic trim included, 4-pack.

## Accessories

---



### SLWZ-DIM-01

Wi-Fi Smart Control with Dimmer, 2.4GHz.



### SLWZ-3WAY-01

Wi-Fi Smart 3-Way Switch, 2.4GHz.