



## BEFORE FIRST USE:

Please leave the dehumidifier sitting outside the box for **24 HOURS** before plugging it in.

The dehumidifiers may have been tilted or placed upside down during shipping. Leave the dehumidifier sitting for 24 hours so the oil in the compressor can settle from the move, not doing so can affect the performance or lifespan of the dehumidifier.

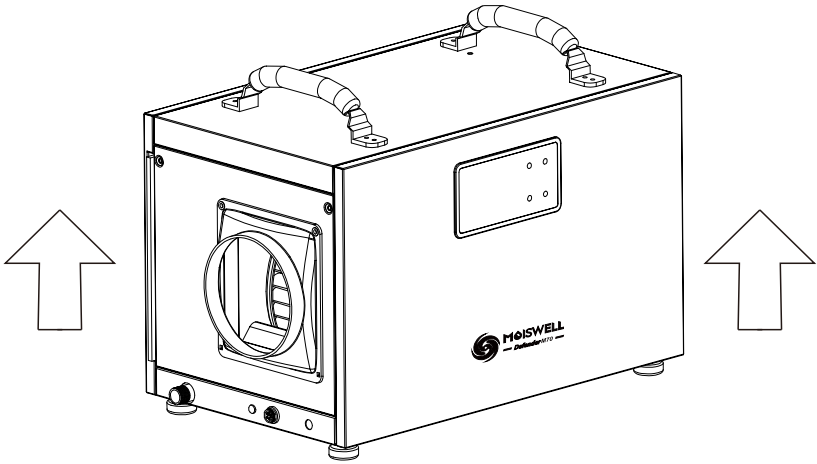

**Parts Identification**

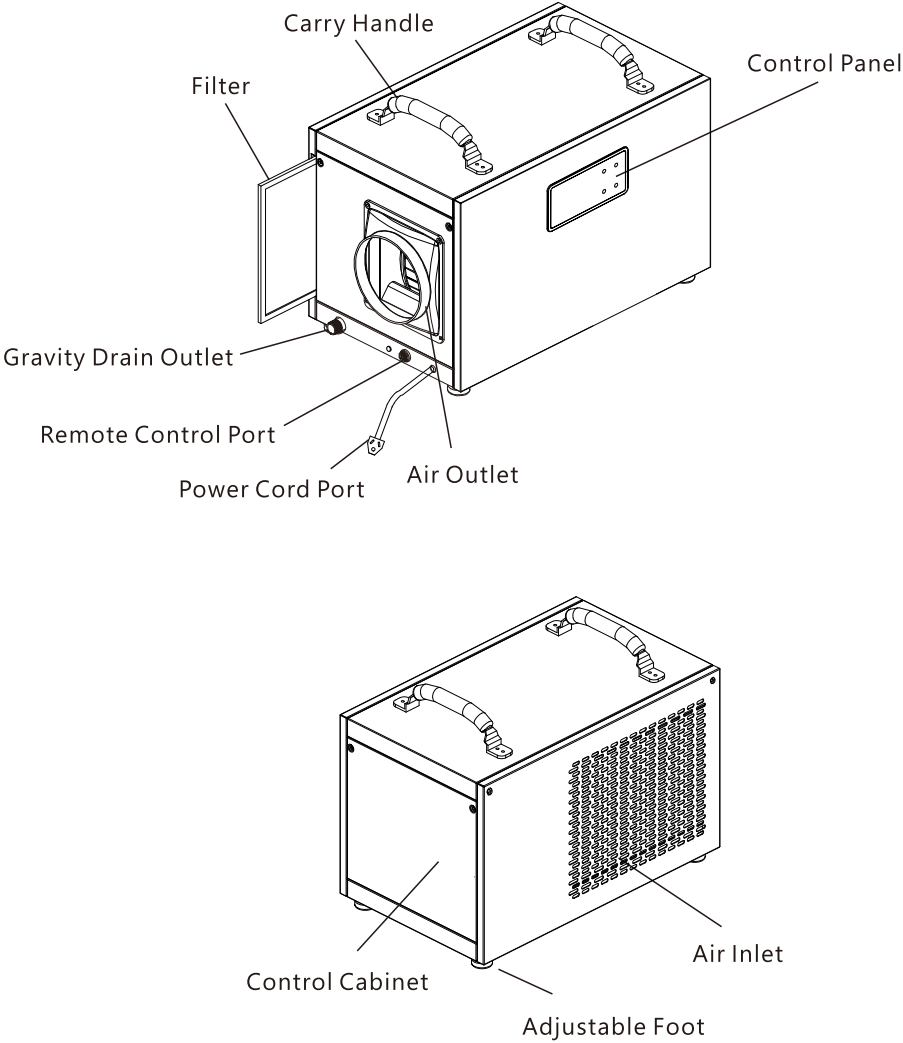

**NOTE:** DO NOT OBSTRUCT THE AIR INLET AND/OR OUTLET.


## OPERATION INSTRUCTIONS

### 1. Position Your Dehumidifier

- Make sure to install the dehumidifier **horizontally** to minimize vibration and/or noise. Importantly, prevents water leakage.
- You can adjust the feet to level the dehumidifier.

To adjust the feet,

- Turn the nut in a clockwise direction to get the nut loosen;
- Turn the foot in a clockwise direction to get the foot down or turn the foot in a counterclockwise direction to get the foot up;
- Turn the nut in a counterclockwise direction to fix the foot.

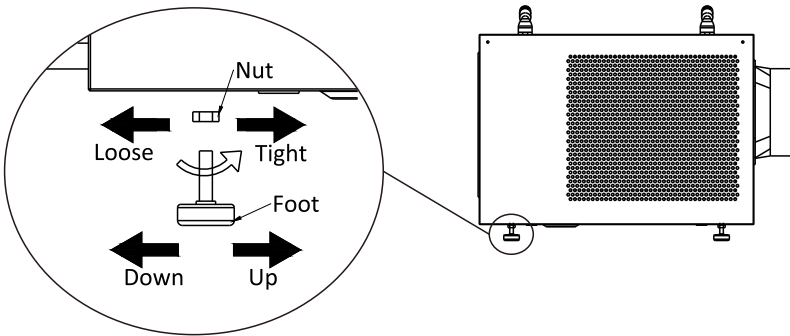

For optimal outcomes, please:

- Operate your dehumidifiers in an enclosed area.
- Close all doors and windows that open to the outside to maximize water removal efficiency.
- Place your dehumidifier away from obstructions, and keep it away from anything that could block airflow into and out of the unit.

## 2. Set Up the Drainage

### Drain by Gravity

The collected condensation water can be drained by gravity. When using gravity to drain.

- Connect the drain hose to the Gravity Drain Outlet;
- Place the unattached end of the hose to a suitable drainage facility. The drainage facility should be lower than the drain outlet of the dehumidifier. (Ensure there are no kinks or other obstructions that will stop the water to flow.)

## 3. Plug in Electrical Cord

### IMPORTANT

Please let the dehumidifier sit outside the box for **24 hours** before initial plugging in.

To properly operate the dehumidifier, please plug it into a GFCI-protected 115-volt outlet with a rating of at least 16 amps. Uncoil the power cord and securely connect it to an appropriate outlet.

**Note:** When the dehumidifier is first plugged into AC power, the control panel display will light up for a second, which is part of the dehumidifier's self-diagnosis procedure and no action is required. This indicates that the dehumidifier is functioning correctly and ready to operate effectively. You will still need to press the POWER button to turn the dehumidifier on.

If not been operated for over 50 seconds, the control panel will become dim until pressed buttons again.