


### PRODUCT CODE

- DCM-M-80, box of sheets to cover 80 sf
- DCM-M-150, roll to cover 150 sf
- DCM-MW-80, box of sheets to cover 80 sf
- DCM-MW-150, roll to cover 150 sf

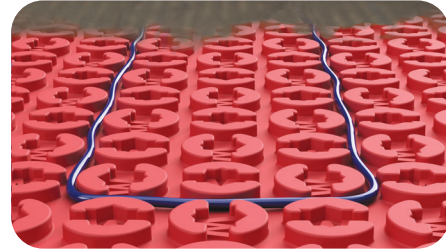

### PRODUCT DESCRIPTION

The TCNA-tested DCM-PRO anti-fracture Membrane can be installed on wood and cement subfloors using any tile adhesive. The patented DCM-PRO design allows for more adhesive to connect with the cable thereby distributing the heat more evenly. There is no waiting required after installation so you can begin laying the flooring immediately. The DCM-PRO Membrane is ready to tile.

Installers can use either modified or unmodified adhesives over the membrane to suit their installation needs. The DCM-PRO Membrane can even be covered with self-levelling mortars (SLU's) to allow installation of small format tiles and other floor types such as glue-down wood and LVT's, to be laid on top of the DCM-PRO System. The unique design of the DCM-PRO Membrane protects the cable from installation damage leading to a reduced risk of cable failures.


The membrane has been successfully tested to ANSI 118.12 standards and performed well on the Robinson test (ASTM C-627). **It is the highest-rated membrane for floor heating systems.**

### FEATURES

- Under 6mm – 1/4" thick
- Rated as Anti-Fracture membrane as tested by the TCNA against ASTM 118-12
- Installs with regular or modified thinsets
- Ready to tile over
- Use any adhesives or SLU's on top for flooring installations
- Highest heating outputs with DCM-PRO Cable
- Lowest running costs with 1/4" Warmup Insulation Boards (WSC-0725)
- Smart operation with 4iE-04 Smart WiFi Thermostat (WSC-0926)

### APPLICATION

The DCM-PRO Membrane can be installed using modified thin set over plywood and concrete subfloors. Warmup DCM-PRO Cable can be installed at 3 or 4 pegs to achieve the desired heat output. See chart.



### PRODUCT LISTING

#### DCM-PRO PEEL-AND-STICK MEMBRANE

Code	Description	Dimensions
DCM-M-80	Box of 10 sheets, covering 81.6sqft in total.	2'6" x 3'3" 770mm x 980mm
DCM-M-150	Roll of membrane, covering 150 sqft in total.	46'7" x 3'3" 14200mm x 980mm
DCM-MW-80	Box of 10 sheets, covering 81.6sqft in total.	2'6" x 3'3" 770mm x 980mm
DCM-MW-150	Roll of membrane, covering 150 sqft in total.	46'7" x 3'3" 14200mm x 980mm

### WARRANTY & MAINTENANCE

When installed according to the installation manual, the DCM-PRO System (DCM-PRO Cable + Peel-and-Stick Membrane) is covered by Warmup's 30-year manufacturer warranty.

### TECHNICAL SUPPORT

Warmup is available 24/7/365.

For quotes, layouts and specific technical information, contact us at:

#### Warmup USA

(888) 927-6333

us@warmup.com

#### Warmup CANADA

(888) 592-7687

ca@warmup.com

### RELATED PRODUCTS

- 4iE® Smart Thermostat - see WSC-0926
- DCM-PRO Cable - see WSC-0816
- DCM-PRO Membrane for DCM-PRO Cable - see WSC-1026