

ASSEMBLY INSTRUCTIONS

MODEL#: PND-2125 AG
PND-2125 PC
PND-2127 AG
PND-2127 PC

NOTE : Only the qualified technician can be allowed to fix and maintain.


IMPORTANT!

Make sure that the power is switch off at the electricity mains supply before commencing work.

FIXING INSTRUCTIONS

1. Thread the pole (G) into the ceiling base until it is tight. Do not turn the ceiling base.
2. Thread the tube (F) into the tube (G) until it is tight.
3. Thread the tube (E) into the tube (F) until it is tight.
4. Thread the tube (D) onto the tube (E) until it is tight.
5. Thread the tube (D) onto lamp body (C).
6. Connect the wires using wire nut (A) (Live wire connect live wire, natural wire connects the nature wire), then attached the copper wire around the green ground wire (GND).
7. Attach fixture (H) to outlet box by aligning support screws (B), then secure with ball nuts (I).
8. Remove Iron ring (K) from lamp body, Install the glass shade (J), use the Iron ring (K) to secure the galss shade (J) on the lamp body (C), Other lampshades refer to the same method. Please do not lock the iron ring(K) too tight to avoid glass crack when assembling glass.
9. Install bulbs (L)(not included) into the socket.

- A. End wire connector
- B. Support screws
- C. Lamp body
- D. Tube
- E. Tube
- F. Tube
- G. Tube
- H. Outlet box screws
- I. Ball nuts
- J. Glass shade
- K. Iron ring
- L. Bulb (not included)

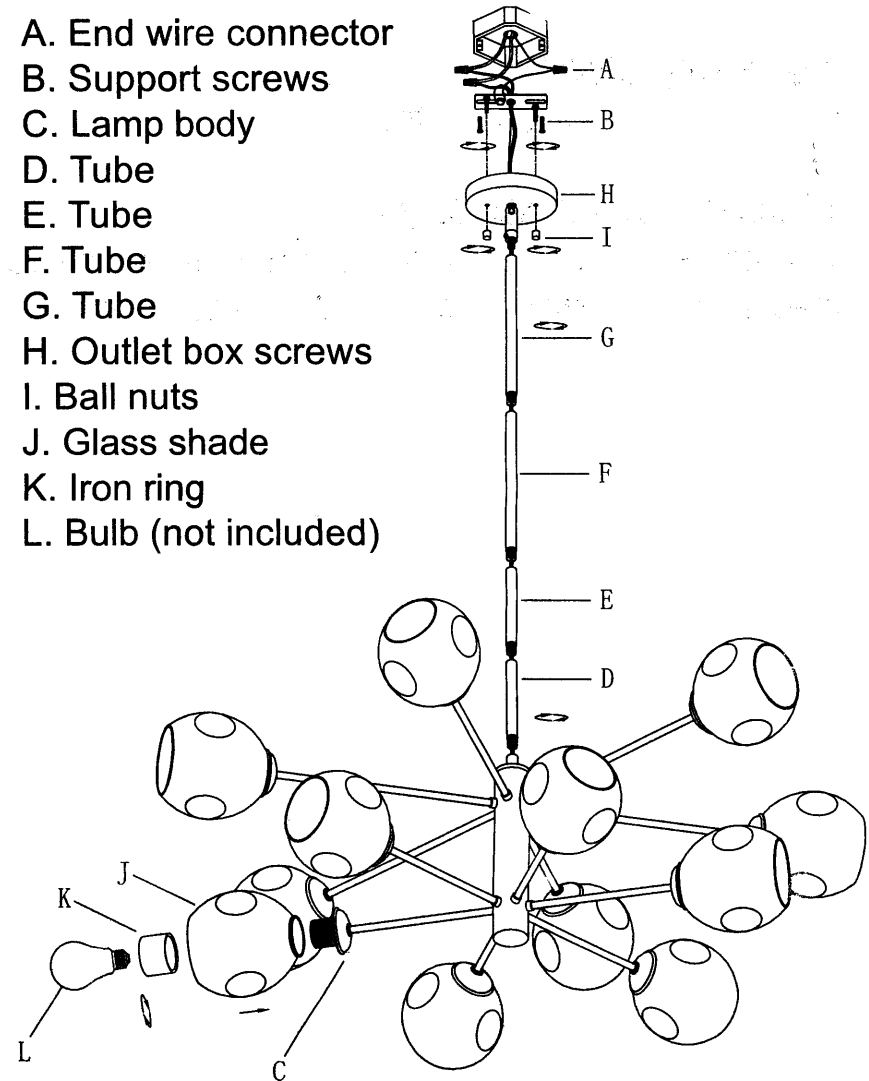

REPLACEMENT BULB

Do not exceed the maximum wattage.

Light bulbs recommended: TAPY A 60W Max.120V E26

LEANING CARE

Clean with a soft dry cloth.

RSAFETY INFORMATION

Do not touch the bulb with bare hands. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.