


NO. 36 FOUNDATION SILL SCREED

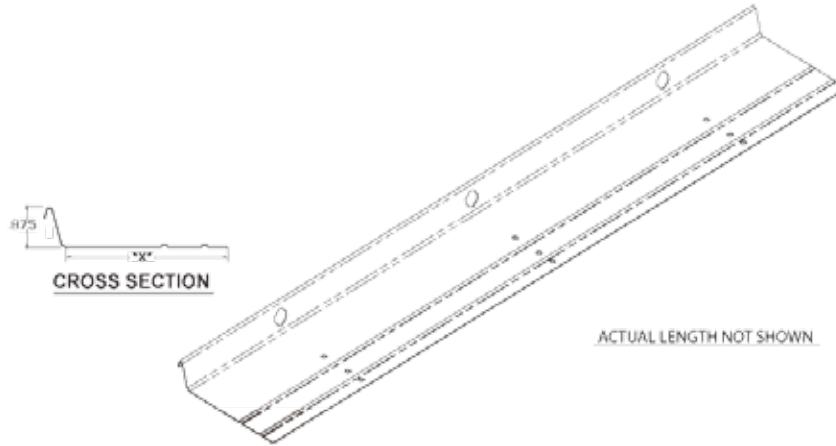

ASTM's and Code Standards

- ASTM A653
- 2007 CBC
- 2006 IBC

LEED Points and Recycled Content

By using CEMCO metal lath products, your project can contribute to earning LEED points for:

- LEED MR 2.1 and 2.2: Construction Waste Management: Up to 2 points.
- LEED MR 4.1 and 4.2: Recycled Content: Up to 2 points.
- LEED MR 5.1 & 5.2: Regional Materials

CEMCO cold-formed steel framing products contain 30% to 35% recycled steel.

These products are produced from steel consisting of the following contents:

- Total Recycled Content: 32.9%
- Post-Consumer Content: 25.6%
- Pre-Consumer Content: 6.8%
- CEMCO can provide higher recycled content based on blending steel. Please refer to SSMA Tech dated May 2009 to calculate recycled content on blended steel.
- Link to SSMA Tech Note dated May 2009 on LEED® 2.2 Credits for Cold-Formed Steel Framing
Manufacturers: <http://www.ssma.com/documents/TNO6%20SSMA%20LEED%202.2.pdf>

CEMCO's No. 36 Foundation Sill Screed is nailed or stapled to the sill plate provides a straight line stucco stop. Manufactured with 1/2" holes, the sill screed allows for water and moisture to weep from the exterior plaster system and away from the structure.

Packaging

Size	Ground (G)	Steel Thickness	Flange Size	Wt./Mlf.	Length	Pcs./Bdl.	Pcs./Pallet
5 1/2"	7/8"	.019"	3-1/2"	407 lbs.	10'	10	1000



Technical Services

For more technical information about this and other CEMCO products, contact Technical Services at 800.416.2278

Project Information

Name: _____
Project: _____

Contractor Information

Name: _____
Contact: _____
Phn: _____ FAX: _____

Architect Information

Name: _____
Contact: _____
Phn: _____ FAX: _____