


HyperCLW10-X0 - 4121510X1
 HyperCLW12-X0 - 4222010X1
 HyperCLW14-X0 - 4422510X1

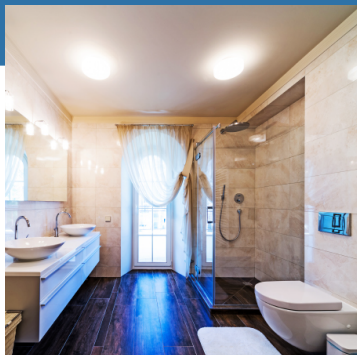

CEILING LIGHT LED MODEL W

HYPERIKON®

Hyperikon® LED Ceiling Lights offer a vast choice of options, with the 10", 12", & 14" sizes. Replace any 150W HID, HPS or CFL light with Hyperikon's Ceiling Lights, which consume only 15W, 20W & 25W.

SPECIFICATIONS

Model Name	SKU	Wattage	Lumens	Efficacy	Kelvin
HyperCLW10-30	412151031	15W	1140 Lm	76 Lm/W	3000K
HyperCLW10-40	412151041	15W	1220 Lm	81 Lm/W	4000K
HyperCLW12-30	422201031	20W	1600 Lm	80 Lm/W	3000K
HyperCLW12-40	422201041	20W	1580 Lm	79 Lm/W	4000K
HyperCLW14-30	442251031	25W	1950 Lm	78 Lm/W	3000K
HyperCLW14-40	442251041	25W	1980 Lm	79 Lm/W	4000K

MODEL DESIGN



Voltage
120-277V



Wired
Fixture



Beam Angle
120°



CRI
84+




Dimmable
Triac



Temperature
-15 °F to 122 °F

- 35,000+ hours of lifespan, more than 32 years based on 3Hrs/day average.

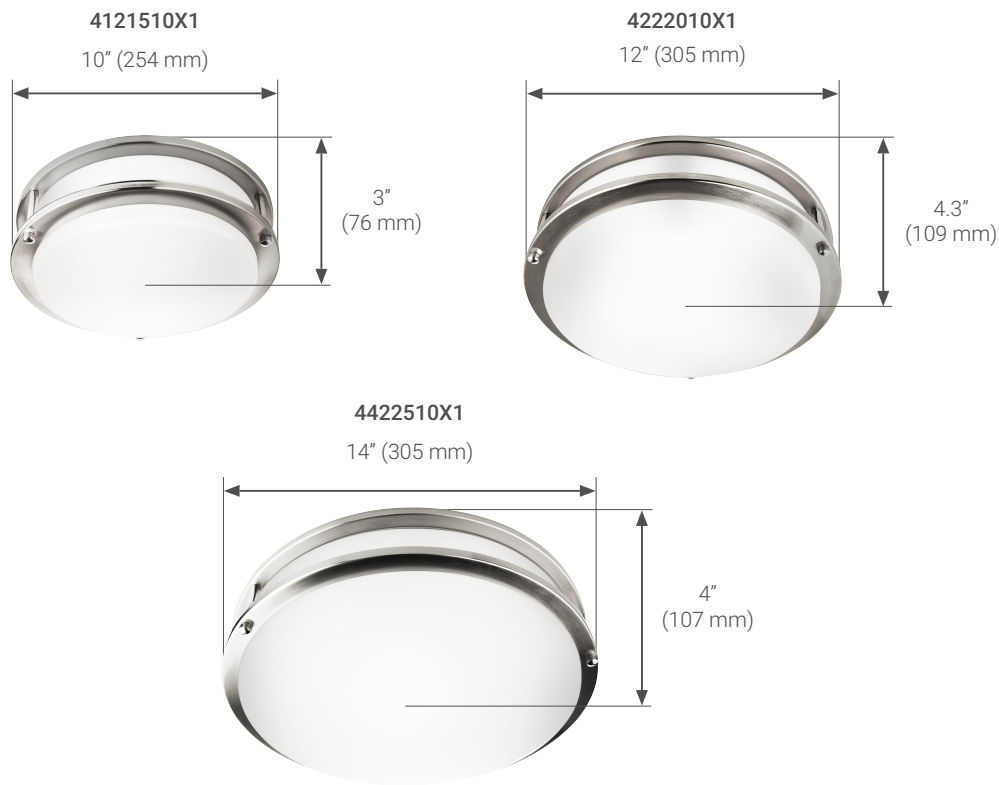

WARNINGS AND CAUTIONS

- Turn power off before inspection, installation or removal. Risk of electric shock - do not use where directly exposed to water or weather.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.

HYPERIKON®

(888) 846-4973
 info@hyperikon.com
 707 Broadway Suite 800
 San Diego, CA 92101
 www.hyperikon.com

