




Item 1001853836

Model #4131F

USE AND CARE GUIDE

FARMHOUSE SINGLE BOWL KITCHEN SINK

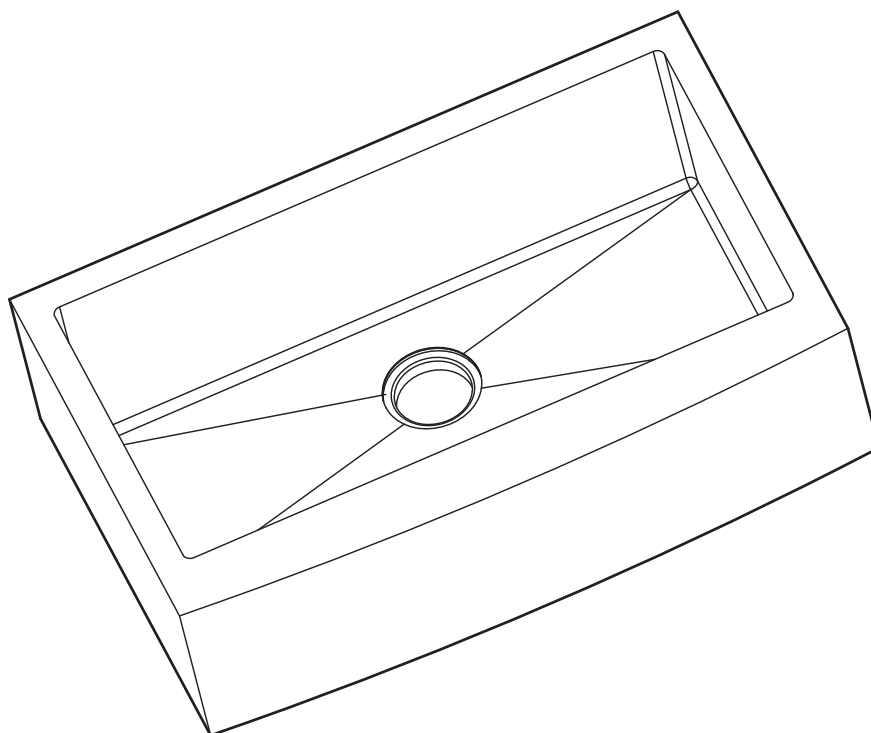

Questions, problems, missing parts? Before returning to the store,
call Glacier Bay Customer Service
8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

HOMEDEPOT.COM/GLACIERBAY

THANK YOU

We appreciate the trust and confidence you have placed in Glacier Bay through the purchase of this sink. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Glacier Bay!

Table of Contents

Safety Information	2
Warranty	2
Pre-Installation	3

Undermount Installation	5
Flushmount/Topmount Installation	7
Care and Cleaning	7

Safety Information

Before installing this sink, read this instruction manual carefully. It contains important information concerning the safe installation, operation, and maintenance of your sink.

Retain this manual for future use. In the event of sale, transfer, or relocation, ensure this manual remains with the sink.

NOTICE: Avoid leaving wet sponges, salt, and corrosive substances on the sink for long periods of time. Lines and scratches may be caused by improper use of the sink.

NOTICE: Do not place the sink on its side as there is a risk of damage.



WARNING: Keep all packaging materials out of the reach of children to prevent possible choking or suffocation.



WARNING: Use caution when installing the sink. There is a risk of crushing your fingers when inserting the sink into the installation location.



CAUTION: Never place hot objects such as hot pans on the sink. Wait until the object has cooled or use a heat resistant plate when placing hot objects on the sink surface.

Warranty

LIMITED LIFETIME WARRANTY

This limited lifetime warranty is extended to the original purchaser of this sink. The manufacturer warrants this sink to be free from all manufacturing defects in material and workmanship. The manufacturer will repair or replace, at no charge, excluding labor, any sink that is proven to be defective under normal use. An equivalent replacement will be issued to the original owner provided the defective sink was installed in accordance with the installation procedures, used and cleaned as recommended, and not damaged due to abuse, misuse, or negligence. Chips, scratches, and stains are not deemed to be manufacturing defects. The manufacturer will not be held liable for chips, scratches, and stains that can occur under normal use over a period of time. Please refer to the cleaning instructions to maintain your sink in its original appearance. The manufacturer shall not be held liable under this warranty where the sink has been used in a non-domestic application, improperly installed, or damaged from the impact caused by a heavy object being dropped on the sink or from improper handling.

The manufacturer shall not be liable for any inconvenience or expense for material or labor related to the removal or replacement of a defective sink or for any loss or damage to any person or property whatsoever resulting from the defective sink. All transportation costs to and from the point of purchase will be the responsibility of the purchaser.

Any sink returned must be in the original packaging and include all the accompanying accessories, parts, and documentation. The manufacturer reserves the right to inspect any sink reported to be defective prior to replacement of the sink.

WARRANTY EXCLUSIONS

Excluded are any accessories that accompany the sink (strainers, waste fittings, waste chutes, etc.). The manufacturer guarantees all sink accessories to be free from manufacturing defects for one year. The manufacturer is not responsible or liable for indirect, special, or consequential damages arising out of or in connection with the use or performance of its products and its liability under this warranty is limited to the replacement of the defective material at the location of purchase.

The original dated sales receipt must be retained by the customer and is the only acceptable proof of purchase. The manufacturer makes no additional warranties, express or implied, and any implied warranty including that of merchantability or fitness for a particular purpose is limited in its duration to the duration of the written limited warranties set forth herein.

OBLIGATION OF THE ORIGINAL OWNER

No employee, agent, or other person is authorized to provide any warranty on behalf of The Home Depot for a Glacier Bay product that is in addition to or different from the warranty stated above unless the warranty has been previously approved by an authorized representative. This warranty gives you specific legal rights and you may also have other rights which may vary from province to province.


Contact the Customer Service Team at 1-855-HD-GLACIER or visit www.HOMEDEPOT.COM/GLACIERBAY.

Pre-Installation

PLANNING INSTALLATION

Compare all parts to the Hardware Included and Package Contents lists and verify that all parts are included. Inspect all parts for damage. If there are missing parts or visible damage to the sink, do not install and contact the Customer Service Team at 1-855-HD-GLACIER.


TOOLS REQUIRED




Silicone
sealant




Safety goggles



Phillips
screwdriver



Hammer




Jigsaw



Drill and
drill bit




Level



Square

Pre-Installation (continued)

PACKAGE CONTENTS

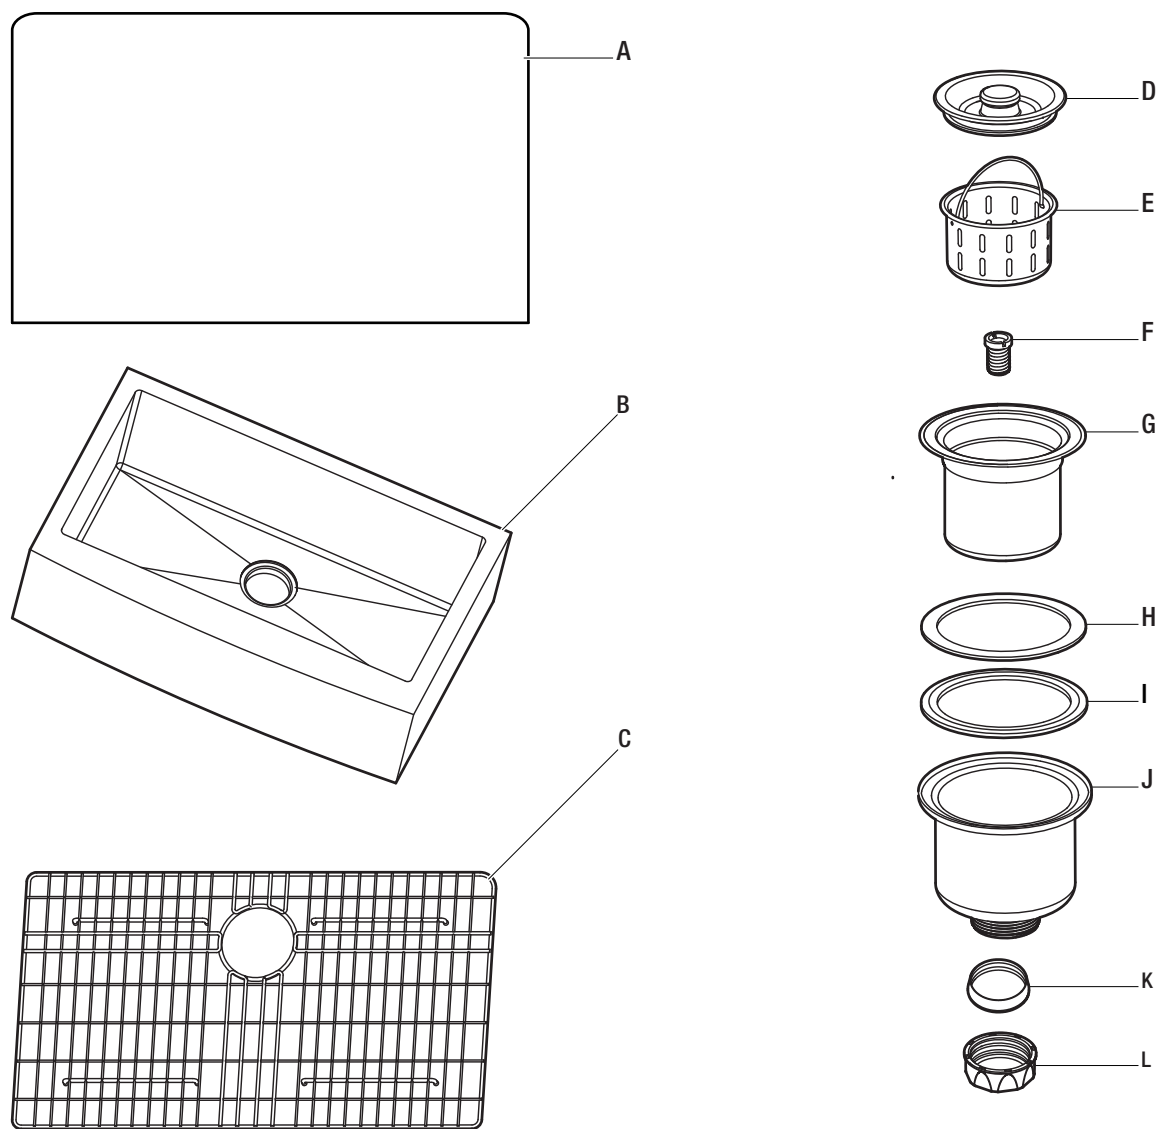

Part	Description	Quantity
A	Template	1
B	Sink	1
C	Bottom glid	1
D	Cover	1
E	Basket	1
F	Screw	1

Part	Description	Quantity
G	Strainer bowl	1
H	Gasket	1
I	Double lip seal	1
J	Waste bowl	1
K	Gasket	1
L	Lock nut	1

Undermount-Installation

1 Preparing the cabinet

NOTICE: It is strongly suggested that you contact a professional countertop fabricator when installing the sink as an undermount.

NOTICE: The cabinet must be installed, secured, plumb, and level before installing the sink.


NOTICE: It is recommended to provide the cabinet maker with the actual sink prior to cabinet fabrication. Before installing the sink, verify that the distance from the top of the doors to the top of the cabinet is greater than the apron front.

NOTICE: Double check the measurement of the cabinet cutout and make any necessary adjustments by either adding filler strips or sanding the opening.

NOTICE: A custom sink base cabinet and support framing is required for proper installation.


- ☐ Construct a support frame to fit inside the cabinet opening. Provide appropriate clearance for faucet, water supply lines, drain assembly, garbage disposal and structural parts of the cabinet.
- ☐ Apply painter's tape to the cabinets for marking and cutting purposes. This will protect the cabinet from damage while cutting.
- ☐ Outline the cutout on the front of the cabinet according to the actual sink.
- ☐ Using a sharp saw blade, carefully cut the cabinet on the traced line.

OUTLINE FOR APRON
FRONT SINK CUTOUT

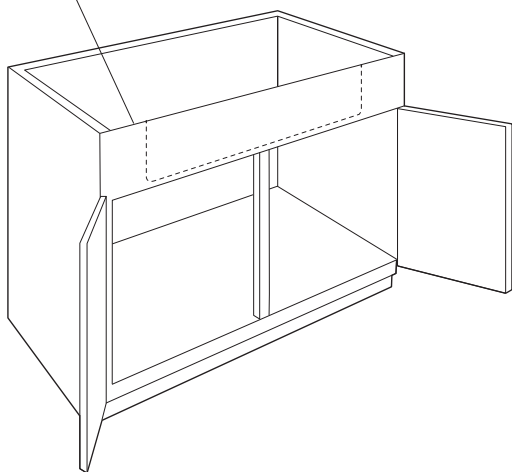

2 Preparing the countertop

- ☐ Position the template (provided with the sink) on the bottom of the countertop, flush to the front and centered; secure with tape.
- ☐ Trace the template and remove. Dry fit the sink to verify measurements.
- ☐ Following the countertop manufacturer's instructions, carefully cut the countertop on the traced line.

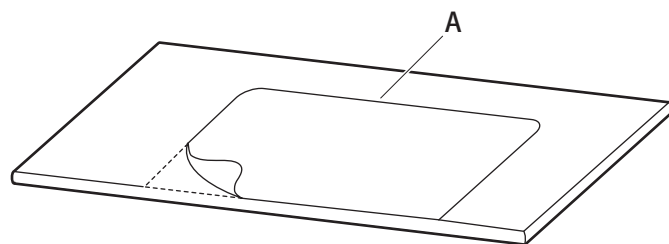

Undermount-Installation


3 Installing the sink

NOTICE: The front sink apron must be secured to the front of the cabinet by attaching fasteners through the cabinet front and into the support framing. Failure of this step can lead to product damage.

NOTICE: The manufacturer is not responsible for sink or countertop if damaged during installation. Be sure to inspect the sink for damage prior to beginning installation.


NOTICE: Metal edges may be sharp - use caution when handling.

- ☐ Clean the sink apron and top rim of all debris. Ensure that the surface on underside of countertop cutout opening is smooth and free of debris.
- ☐ Lower the sink onto the supports and verify the sink is supported by the frame.
- ☐ Push the sink in to ensure the apron is flush to the front of the cabinet.
- ☐ Verify the sink is level. Make any adjustments and shim as needed.

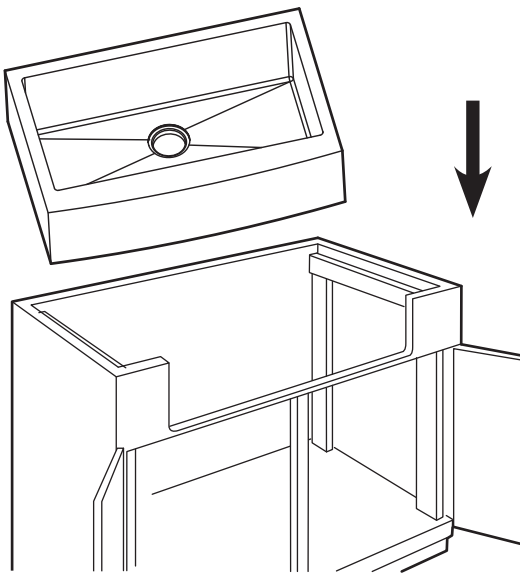

4 Installing the countertop


- ☐ Clean the bottom of the countertop and the top flange (or lip) of the sink with denatured alcohol.
- ☐ Apply a narrow bead of silicone adhesive sealant around the side and back of the sink.
- ☐ Carefully position and secure the sink to the countertop following the manufacturer's instructions.
- ☐ Apply a thin bead of silicone sealant where the sink meets the countertop and cabinet.
- ☐ Immediately remove excess sealant.

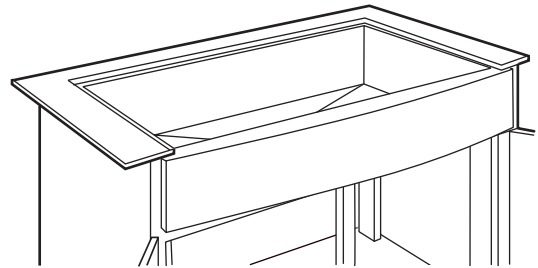

Undermount-Installation

3 Installing the drain assembly

- ☐ Place the gasket (H) on top of the drain hole in the sink (B), followed by the strainer bowl (G).
- ☐ From underneath the sink (B), position the double lip seal (I) with grooves facing up on the drain holes, followed by the waste bowl (J).
- ☐ From the top of the drain hole, screw the screw (F) into the wastebowl (J).
- ☐ Position the gasket (K) at the base of the waste bowl (J) and screw the lock nut (L) with the fitting (not furnished) to the base of the waste bowl (J).
- ☐ Insert the assembled basket (E) into the strainer bowl (G).
- ☐ Put the cover (D) and the silicone seal on the strainer.

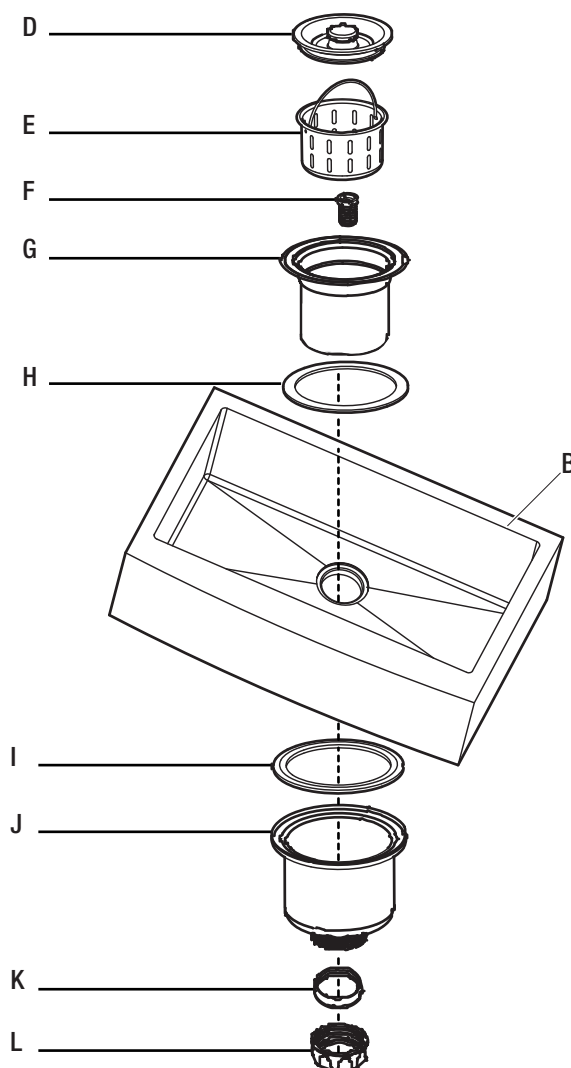

Flushmount/Topmount-Installation

- ☐ It is strongly suggested that you contact a professional countertop fabricator when installing the sink as a flushmount or topmount. This manual does not provide instructions for a flushmount and topmount installation.

Care and Cleaning

- ☐ Do not use abrasive cleaning creams or powders, concentrated caustic soda, formic acid, or anything highly corrosive. For more information on removing difficult stains, contact Customer Service at 1-855-HD-GLACIER or visit your local Home Depot store.
- ☐ Clean with a sponge or soft dish cloth and gentle sink soap. For stains that are difficult to remove, such as calcium deposits, use eraser sponges, vinegar-based cleaners, and lime removers.
- ☐ Rinse the sink with hot water and dry the sink with a soft absorbent cloth.
- ☐ Fruit juices, coffee, and tea can stain the surface of your sink if not removed. Rinse or wipe the sink promptly after these substances make contact with the sink.
- ☐ Never use steam or high-pressure cleaning systems to clean your sink.



Questions, problems, missing parts? Before returning to the store,
call Glacier Bay Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

[HOMEDEPOT.COM/GLACIERBAY](https://www.homedepot.com/glacierbay)

Retain this manual for future use.