

# Measurement Guide

## Inside Mount

Blinds are mounted inside the window casing.


Use a metal measuring tape (cloth tapes may stretch).

Measure the width in 3 different places and use the narrowest width.

Order blind width to the nearest 1/8" without ordering wider than your window width.

Measure the length from the top of the window opening to the top of the window sill.

Select the length (drop) closest to your window length: Do not order blinds shorter than your window opening.

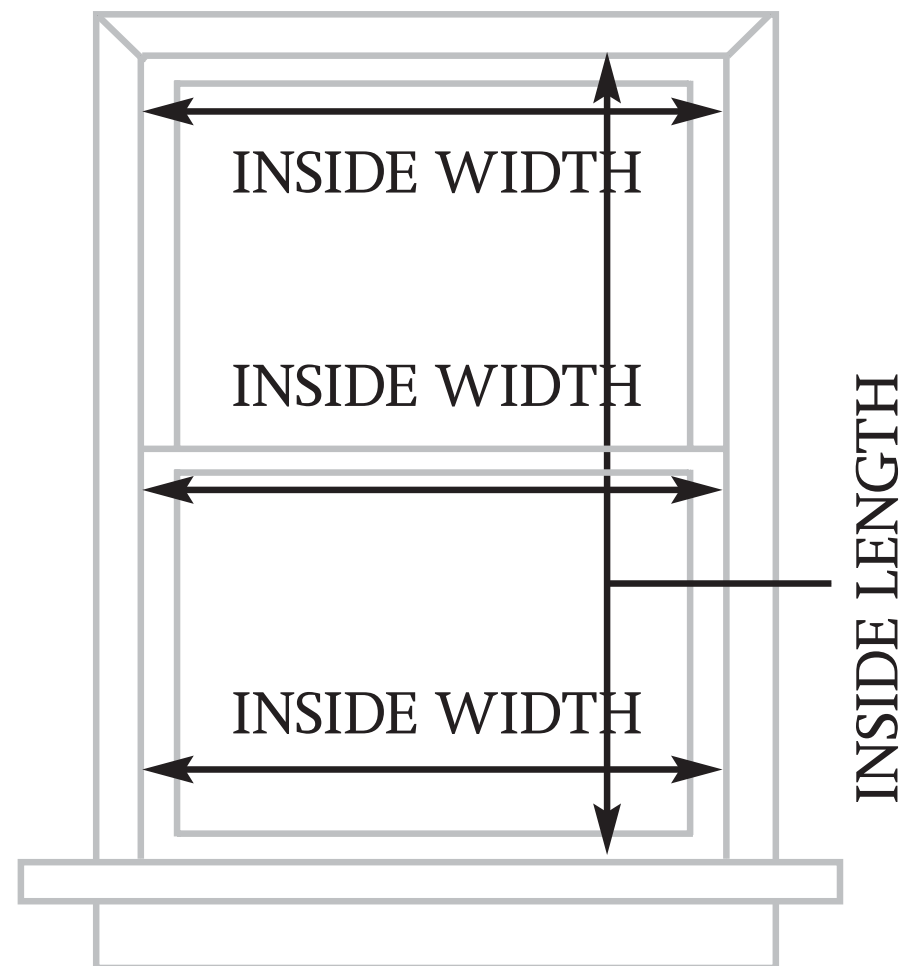

## Outside Mount

Blinds are mounted outside the window casing.

Use a metal measuring tape (cloth tapes may stretch).

Measure the exact width and length of the entire area to be covered. For added light control and privacy, we recommend you add approximately 1½" on each side and approximately 3" for overall length.

Order the blind width to the nearest 1/8" without ordering less than the area you want to cover.

Select the length (drop) closest to the area you want to cover:

Do not order blinds shorter than the area to be covered.

