



Item #1006456732
Model #6CUwheelbarrow

USE AND CARE GUIDE

6 CU FT POLY DUAL-WHEEL FLAT-FREE WHEELBARROW

Questions, problems, missing parts?

Before returning to the store, call


Husky Customer Service

8 a.m. – 7 p.m., EST, Monday-Friday

9 a.m. – 6 p.m., EST, Saturday

1-888-43-HUSKY

HUSKYTOOLS.COM

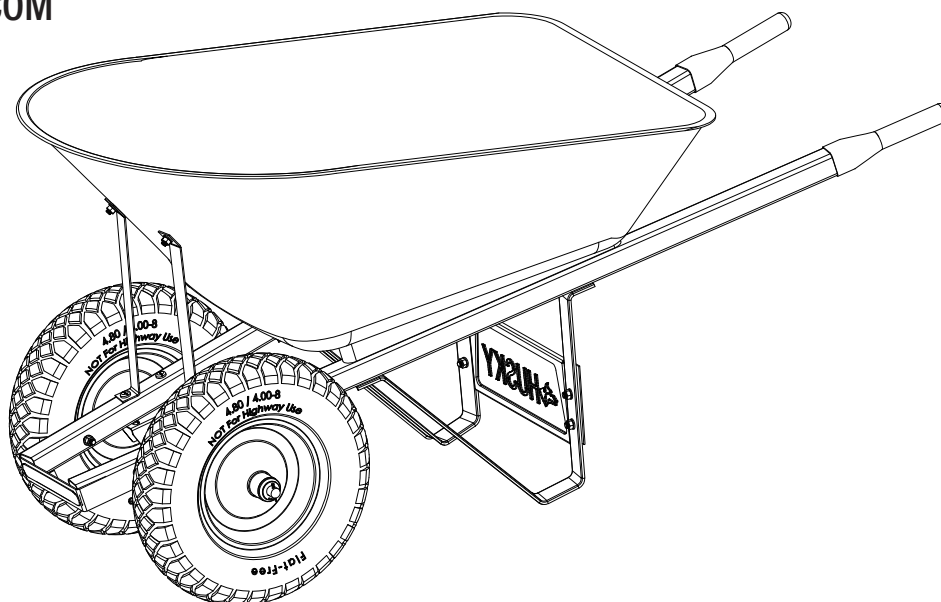

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this wheelbarrow. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents	2	Tools required	2
Safety Information	2	HARDWARE INCLUDED	3
Pre-installation	2	Package Contents	3
Planning Installation	2	Assembly	4

Safety Information

- Before using this product, please read, understand and follow all instructions.
- Do not exceed the total maximum load capacity of 250 lb (120 kg). The rated weight is based on a uniformly distributed load.
- This wheelbarrow is not suitable for use on highways or high-speed use.
- Distribute the load evenly on the surface of the tray.
- Do not place items on the top edge of the tray.
- If any parts are damaged, cracked or misplaced, please do not use the cart before replacing the parts.
- Do not use the wheelbarrow on a surface that will damage the tires.
- It is recommended to check each usage of the wheelbarrow.
- Keep this manual for future reference.



DANGER: Do not allow children to use the wheelbarrow without supervision.



WARNING: Do not use this wheelbarrow to transport passengers.



WARNING: Tire is not for highway service.



WARNING: Tire changing and/or inflation can be dangerous and should be done by trained personnel using proper tools.

Pre-Installation


PLANNING INSTALLATION

Read and follow all safety rules and operating instructions before using this product.

TOOLS REQUIRED (Not included)



slotted
screwdriver



Wrench

Pre-installation (continued)

HARDWARE INCLUDED




NOTE: Hardware not shown to actual size.



AA



BB



CC



DD



EE



FF

Part	Description	Quantity
AA	M8x130 mm bolt and nut	2
BB	M8x70 mm bolt and nut	2
CC	M8x58 mm bolt and nut	6
DD	M8x23 mm bolt and nut	6
EE	Cotter pin	2
FF	Washer	2

PACKAGE CONTENTS



A




B




C



D




E




F



G



H



I




J

Part	Description	Quantity
A	Tray	1
B	Handle	2
C	Leg	2
D	Leg brace	1
E	Wedge	2
F	Nose guard	1
G	Wheel	2
H	Axle bracket	2
I	Axle	1
J	Tray Brace	2

Assembly


1 Attaching Wedges to Tray

- ☐ Push bolts (AA & BB) through bottom of tray (A) and through wedge (E).
- ☐ Repeat for second wedge.

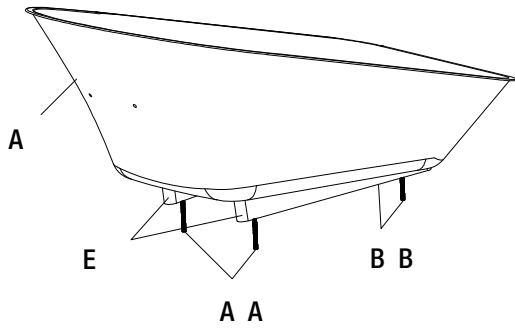


2 Placing Handles on Wedges

- ☐ Turn tray (A) over, so the tray is at an angle of 45 degrees to the ground.
- ☐ Place handles (B) over bolts and lower onto wedges (E).

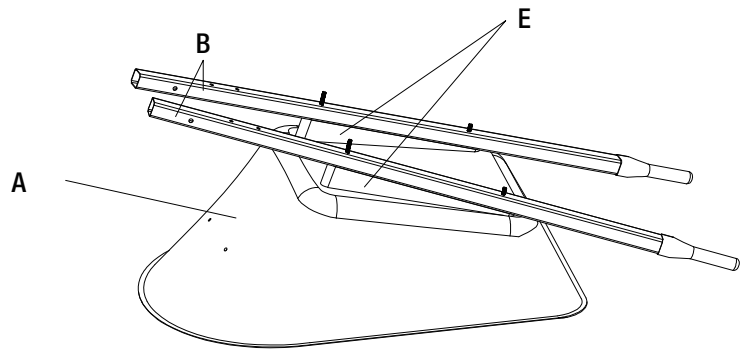


3 Attaching the Legs

- ☐ Make sure the holes in leg (C) are facing the back of the tray.
- ☐ Place leg over bolts (AA & BB) and loosely attach to handle with nuts.
- ☐ Repeat for other leg.

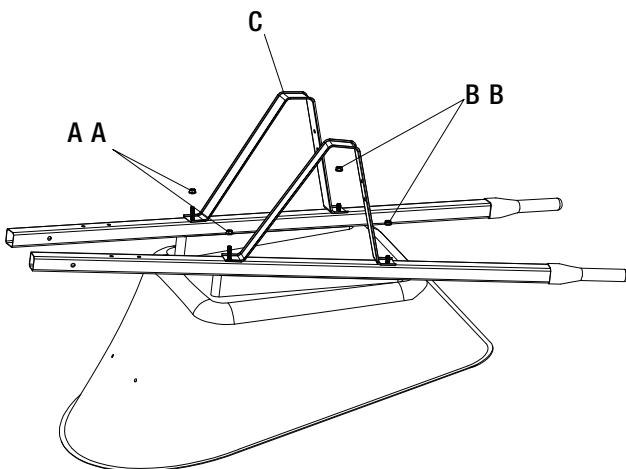

4 Attaching the Leg Brace


- ☐ Place leg brace (D) across the back of leg (C) and loosely attach using bolts and nuts (DD).
- ☐ Repeat to attach the other end of the leg brace to the other leg.

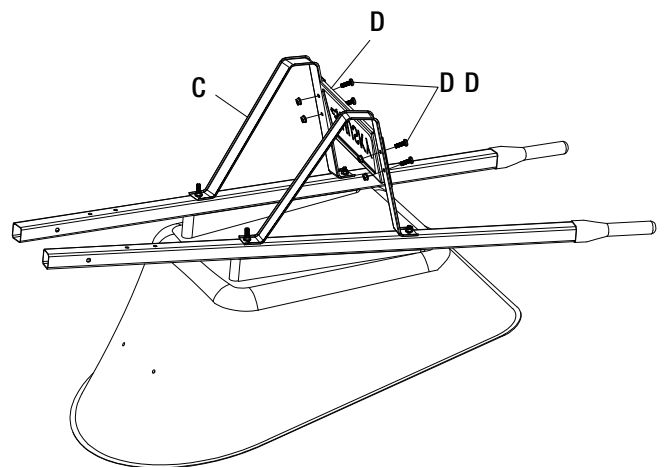

Assembly (continued)


5 Attaching the Nose Guard

- Use bolts and nuts (CC) to attach nose guard (F) to front of handles (B).

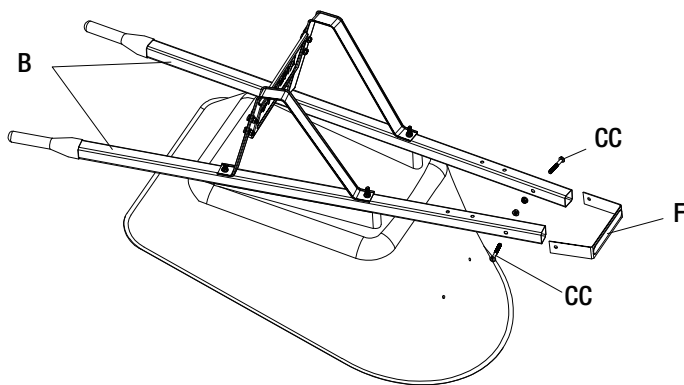


6 Attaching the Axle Bracket and Tray Braces

- Attach axle bracket (H) to bottom of handle (B) using a bolt (CC) pushed through the hole closest to tray.
- Push second bolt (CC) through hole with tray brace (J) then through handle (B).
- Attach the tray braces (J) on to the tray, align the holes and secure with bolts and nuts (DD).

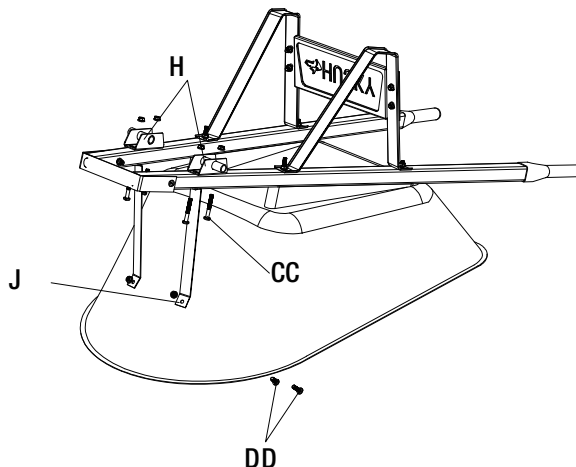

7 Attaching the Axle and Wheels

- Slide axle (I) into attached axle bracket (H).
- Attach wheels (G) on to both ends of the axle (I).
- Secure the wheels (G) with washers (FF) and cotter pins (EE).
- Fully tighten all nuts.

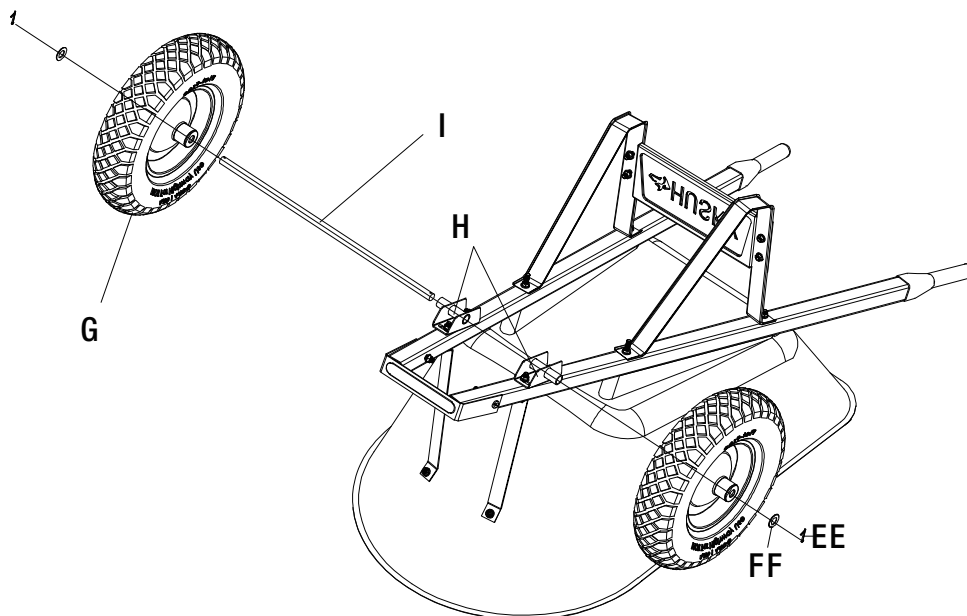



Questions, problems, missing parts? Before returning to the store,
call Husky Customer Service
8 a.m. – 7 p.m., EST, Monday-Friday, 9 a.m. – 6 p.m., EST, Saturday

1-888-43-HUSKY
HUSKYTOOLS.COM

Retain this manual for future use.