


# General Duty Safety Switches

Selection

4 SAFETY SWITCHES

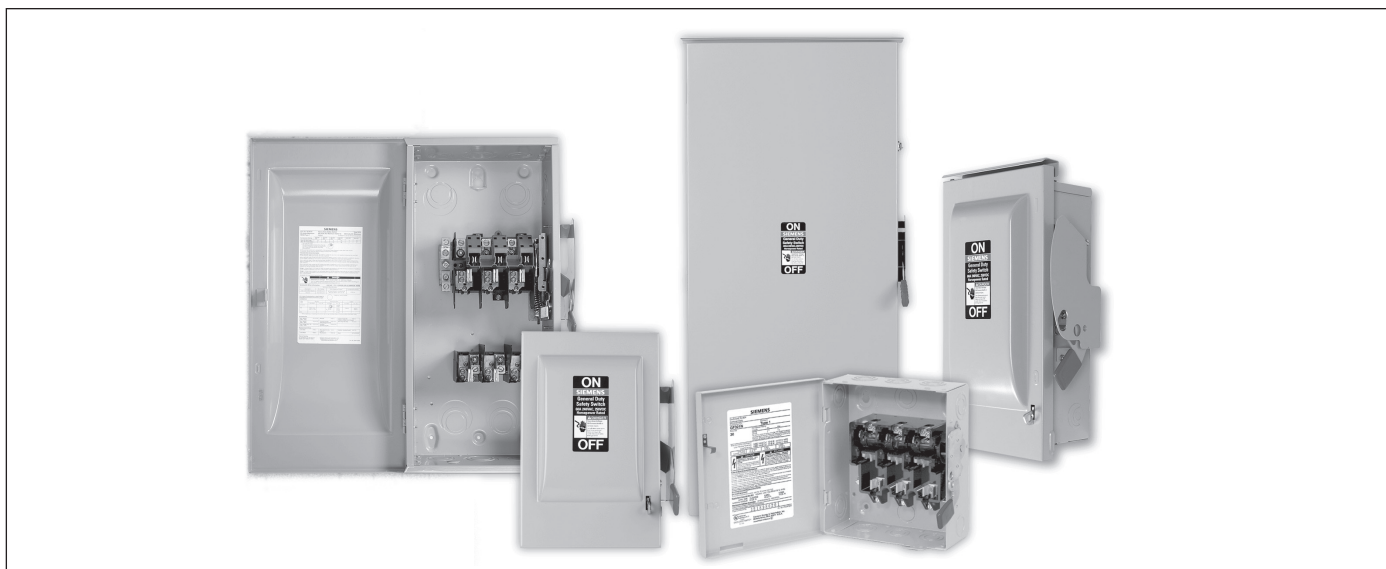

System	Ampere Rating	Indoor — Type 1		Outdoor — Type 3R		Horsepower Rating <sup>①</sup>						
		Catalog Number	Ship Wt. (lbs.) Std. Pkg	Catalog Number	Ship Wt. (lbs.) Std. Pkg	240V AC		250 Volt DC				
						1-Phase, 2-Wire	2-Phase, 4-Wire	3-Phase, 3-Wire	Std.	Max.	Std.	Max.

## 240 Volt Fusible

### 2-Pole, 2-Fuse, and Solid Neutral<sup>②③④</sup>

### 240 Volt AC/250 Volt DC

	30	GF221N	35 <sup>⑤</sup>	GF221NR <sup>⑥</sup>	35 <sup>⑤</sup>	1½	3	—	—	3	7½	5
	60	GF222N	14	GF222NR	14	3	10	—	—	7½	15	10
	100	GF223N	23	GF223NR	23	7½	15	—	—	15	30	20
	200	GF224N	47	GF224NR	48	15	—	—	—	25	60	40

### 3-Pole, 3-Fuse, and Solid Neutral<sup>④</sup>

### 240 Volt AC/250 Volt DC

	30	GF321N	24 <sup>④</sup>	GF321NR <sup>⑥</sup>	24 <sup>④</sup>	1½	3	—	—	3	7½	5
	60	GF322N	15	GF322NR	15	3	10	—	—	7½	15	10
	100	GF323N	25	GF323NR	25	7½	15	—	—	15	30	20
	200	GF324N	49	GF324NR	50	15	—	—	—	25	60	40
	400	GF325NA	94.6	GF325NRA	94.6	15	—	—	—	50	125	50
	600	GF326NA	95.6	GF326NRA	95.6	15	—	—	—	75	200	—

## 240 Volt Non-Fusible<sup>③④</sup>

### 2-Pole or 3-Pole

### 240 Volt AC/250 Volt DC

	30	GNF321	24 <sup>④</sup>	GNF321R <sup>⑥</sup>	24 <sup>④</sup>	—	3	—	—	7½	—	5
	60	GNF322	12	GNF322R	13	—	10	—	—	15	—	10
	100	GNF323	23	GNF323R	24	—	15	—	—	30	—	20
	200	GNF324	46	GNF324R	47	—	15	—	—	60	—	40
	400	GNF325A	114	Use 600V Switch — HNF365RA	—	15	—	—	—	125	—	50
	600	GNF326A	116	Use 600V Switch — HNF366RA	—	15	—	—	—	200	—	—

① Dual horsepower ratings: Std.- applies when non-time delay fuses are installed. Max.- applies when time-delay fuses are installed.

② These switches are UL-listed for application on grounded B-phase systems.

③ Suitable for use on 3-phase motor loads.

④ Service entrance labeled.

⑤ Has provision for ECHA type hub.

⑥ 5 switches per standard package.

⑦ 10 switches per standard package.

⑧ Height reduced switch (45.25 rather than 56 inches in height) for use with 500MCM or smaller conductors.