


ultraSeal floorMuffler®

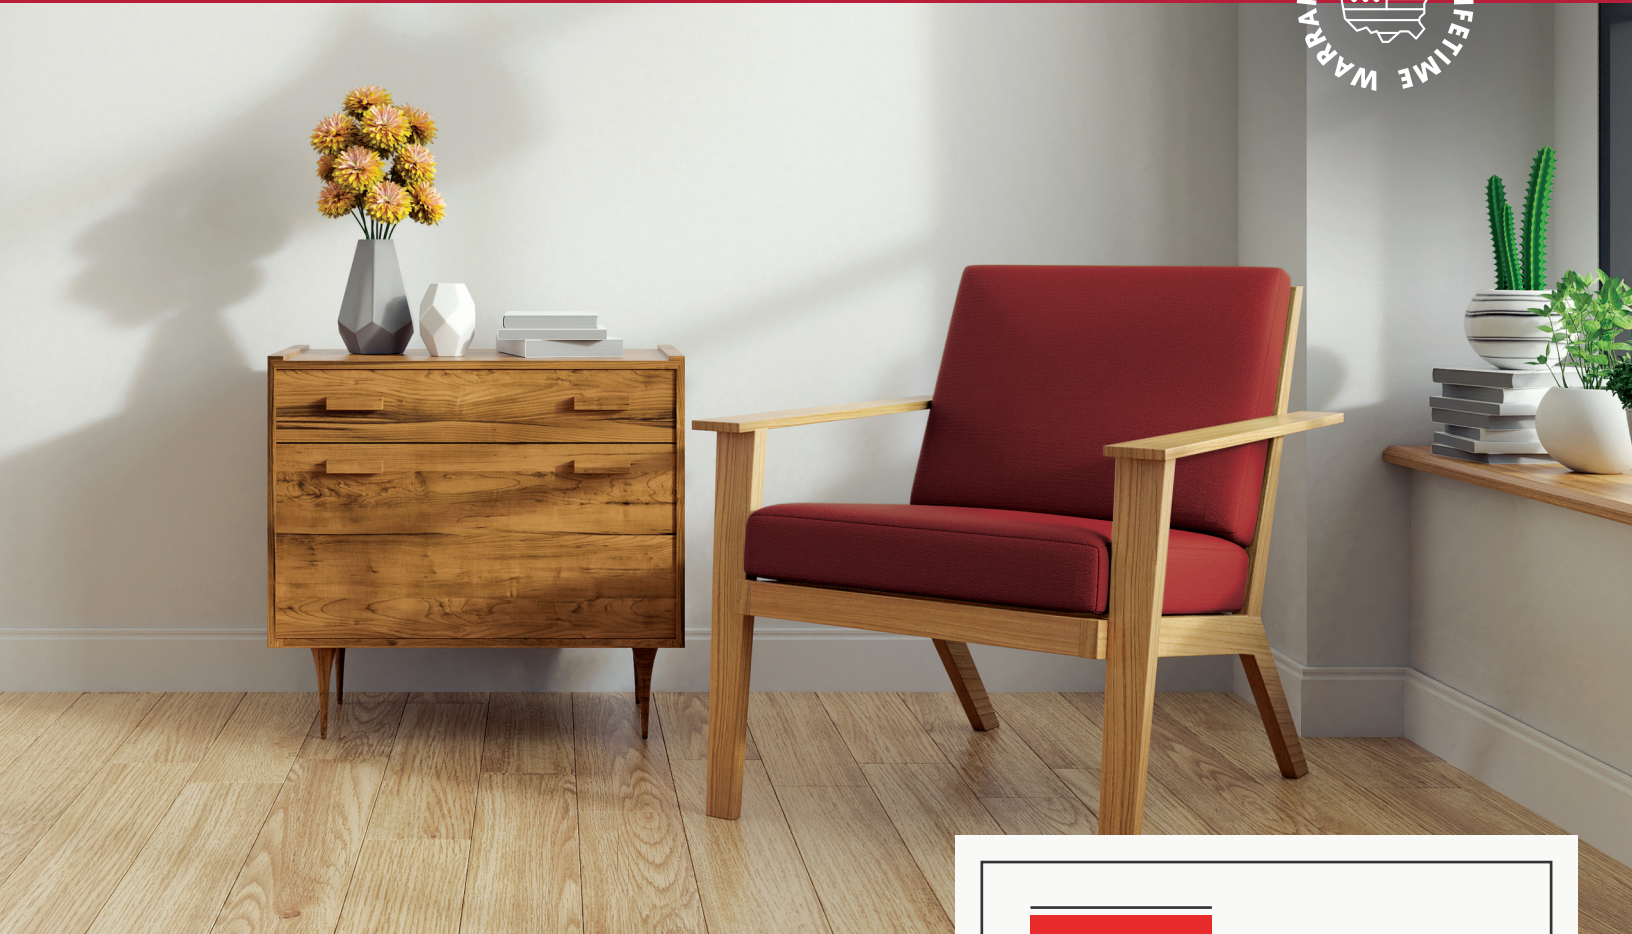

- PREMIUM FLOORING UNDERLAYMENT
- FOR LAMINATE, ENGINEERED, SOLID WOOD AND RIGID CORE* FLOORING
- FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS
- FOR FLOATING, NAIL DOWN AND DOUBLE GLUE DOWN INSTALLATIONS

Item No. 0264251

1,800 Sq. Ft / Roll - 2mm x 48" x 450'

FLOORMUFFLER.COM

Manufactured by:
Diversified Industries.
121 High Hill Rd, Swedesboro, NJ, USA.
08085

| | |
|--|---|
| <p>74 IIC 76 HIIC 73 STC 25 ΔIIC</p> <p>The highest rated and most effective acoustic barrier on the market.</p> | |
| <p>Provides superior moisture protection.</p> | <p>Improves R-Value</p> |
| <p>Proprietary PP Core Technology to ensure the integrity of the tongues and grooves.</p> | <p>Surpasses the Indoor Air Quality emissions requirements.</p> |

*5mm thick or higher. Follow your Rigid Core Flooring Installation Instructions.
** For Glue Down installations, only use adhesives that have been tested by the adhesive manufacturer for installation of the FloorMuffler Underlayment.
Flooring systems protected under USPTO No. 8,276,338; 8,458,975 and 8,707,646

