



DYNAGRIP®
THE GRIP THAT OUTPERFORMS™

Technical Data Bulletin


MIRROR, MARBLE, GRANITE

Construction Adhesive

DAP® DYNAGRIP® MIRROR, MARBLE, GRANITE is a premium grade hybrid adhesive specifically formulated for mirror and countertop installation. This premium hybrid adhesive provides a permanent vertical hold in one-hour ideal for mirror installation. This VOC compliant adhesive is easy to gun and will not stain or damage mirrors, countertops or finished surfaces. DYNAGRIP® MIRROR, MARBLE, GRANITE is a high strength adhesive that delivers exceptional adhesion on porous/non-porous construction materials.



**PERMANENT
VERTICAL HOLD**



**BONDS
NON-POROUS
MATERIALS**



**UP TO
5x
FASTER
BOND STRENGTH**

Recommended For:

- Countertop & Backsplash Installation
- Mirror Installation

Adheres To:


- Aluminum
- Ceramic Tile
- Concrete
- Drywall
- Fiber Cement
- Glass
- Granite
- Marble
- Masonry
- Metal
- Mirrors
- OSB & Enhanced OSB
- Plywood
- Stone
- Wood

Not Recommended For:

- Applications other than mirror, countertop & backsplash installation

DAP Products, Inc.
2400 Boston Street, Suite 200
Baltimore, MD 21224
Phone: 410-675-2100
REV: 11/01/2016

SKU #	SIZE
7079827522	10oz

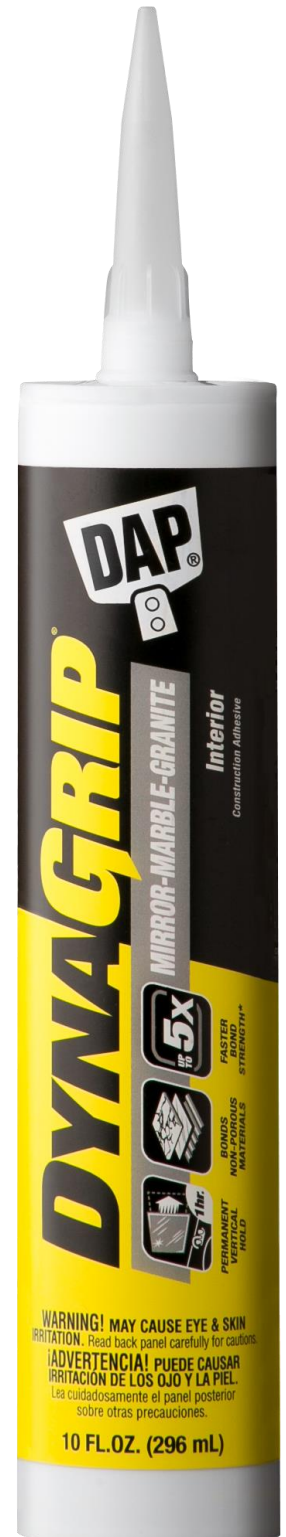



DYNAGRIP
THE GRIP THAT OUTPERFORMS™

MIRROR, MARBLE, GRANITE

Product Features

- Will Not Stain Countertops
- Low Odor
- Easy To Gun
- VOC Compliant

Directions

FOR BEST RESULTS: Apply in temperatures above 20°F. Keep adhesive at or above 40°F prior to use for easier gunning.

INSTRUCTIONS: 1. Surfaces must be clean, structurally sound, and free of debris. 2. Pre-cut and fit materials before applying adhesive. 3. Trim nozzle to desired bead size. ¼" recommended for most applications. 4. Puncture inner foil seal. 5. Load cartridge into applicator gun. **MIRROR:** 1. Apply a continuous bead around the perimeter of the back of the mirror (NOTE: To prevent the adhesive from squeezing out of the sides do not place bead too close to the edge of the mirror), apply "S" shaped bead of adhesive covering the center of the mirror. 2. Within 20 minutes, position and press mirror firmly into place. 3. Apply mechanical fasteners and brace as needed. 4. Allow to dry for a minimum of one hour. **COUNTERTOP:** 1. Apply a continuous bead on desired surface. 2. Within 20 minutes, position and press countertop in place. 3. Brace vertical applications such as backsplashes as needed. 4. Allow to dry for a minimum of one hour.

CLEAN UP: Uncured adhesive: use mineral spirits to clean up wet adhesive from surface and tools, following solvent manufacturer's precautions. Do not use mineral spirits to clean skin. Cured adhesive: must be cut or scraped away.

USAGE INFORMATION: For usage information or warranty information, please contact DAP Technical Customer Service at 888-DAP-TIPS or visit dap.com & click on "Ask the Expert".

Contains: Phthalate esters and trimethoxyvinylsilane.

During application & cure, methanol is released. Use only with adequate ventilation. Avoid breathing vapors. Ensure fresh air entry during application & drying. Harmful if swallowed or absorbed through the skin. May cause allergic skin sensitization. Avoid contact with eyes & skin. Wear rubber gloves and eye protection with side shields.

WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

FIRST AID: SKIN CONTACT: Wash skin thoroughly with soap and water. EYE CONTACT: Immediately flood with large quantities of water. INHALATION: Remove to fresh air. INGESTION: **DO NOT INDUCE VOMITING.** Get medical attention immediately if complications arise from exposure. **For emergencies,** call poison control center at 1-800-222-1222. See Safety Data Sheet (SDS) for additional information. For an SDS, contact your supplier or visit dap.com.

KEEP OUT OF REACH OF CHILDREN. DO NOT TAKE INTERNALLY.

TYPICAL PHYSICAL PROPERTIES

- Type: Hybrid Polymer
- Application Temperature: 20°F to 120°F
- Service Temperature: 0°F to 180°F
- Bead Color: White
- Solids: 99.5%
- Shelf Life: 12 months
- Skin Time: 20 minutes
- Cure Time: 24 hours - 7 days
- Coverage:
 - 10.3oz: ¼" bead yields 32 linear ft., 3/8" bead yields 14 linear ft.
- Specifications:
 - ASTM C557 Meets or Exceeds.
- Calif. ARB VOC <0.5% Wt/Wt
- VOC Content: VOC less Water, less Exempt Solvent: <15 g/L