

Catalog Number: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_

Comments: \_\_\_\_\_ Date: \_\_\_\_\_

# Linear LED Vaportight High Performance Luminaire



Linear Vaportight High Performance Luminaires are energy efficient alternatives to linear fluorescents. The performance engineered LED technology delivers consistent color and CRI for a uniform installation and improves lumen maintenance for long useful rated life. Linear Vaportights High Performance Luminaires offers 0-10V dimming, motion control and emergency options, all without changing the form factor. Linear Vaportight High Performance Luminaires are IP65 Rated for outdoor use.<sup>1</sup> Applications include building warehouses, gas stations, parking garages stairwells, car washes and manufacturing. Linear Vaportight High Performance Luminaires are backed by a 5-Year Warranty.

<sup>1</sup> IP65 Rated luminaires are rated for use outdoors where exposed directly to water from rain or irrigation.

## Performance Specifications

<b>CRI</b> _____	80	<b>Min. Start Temp.</b> _____	-4°F (-20°C)
<b>Rated Life</b> _____	50,000 hour life	<b>Max. Operating Temp.</b> _____	104°F (40°C)
<b>Watt</b> _____	40W, 80W	<b>Power Factor</b> _____	>0.98%
<b>Lumens</b> _____	5497, 10217	<b>THD</b> _____	<20%
<b>Lumens per Watt (LPW)</b> _____	114, 128	<b>Warranty</b> _____	5-Year Limited
<b>Input Line Voltage</b> _____	100-277V	<b>Control</b> _____	(0-10V) Select Models
<b>Input Line Frequency</b> _____	50/60 Hz	<b>Weight</b> _____	6.0 lbs.

## Energy Savings

System	System Wattage	Replacement LED	Wattage	Energy Savings
3 Lamp Fluorescents	96W	LVT4CL40/850/5S/LED/MC	40W	67%

## Construction

- Frosted Polycarbonate lens
- Back end knockouts
- Omnidirectional for optimal lighting
- IP65 rated

## Accessories

- Vaportight Mounting Assembly (Mounting bracket, Aircraft Cable, and Hardware) - LVTH4CL/MA - 99628
- Vaportight Motion/Photo Control Wireless Remote - LVTH4CL/WR - 99629
- Vaportight Linkable Cable - LVTH4CL/LC - 99630

## Installation

- Stainless steel clips
- Suspension cable (Standard)
- Ceiling or wall mount
- Operating temperature range is -20°C (-4°F) to 40°C (104°F)

## Electrical

- 100V-277V input range
- UL listed for wet locations
- 50/60 Hz input frequency
- Voltage sensing 100-277V dimmable driver (Select models)

## Ordering Information




Watt	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Dimmable	Luminaire Size W x H	Wattage Equivalent
40 Watt	99622	LVTH4CL40/850/3S/LED	100-277V	5000K	80	5497	50,000	No	47.24" (1200 mm) x 4.29" (109mm)	3-lamp (T8)
80 Watt	99623	LVTH4CL80/850/3S/LED	100-277V	5000K	80	10217	50,000	No	47.24" (1200 mm) x 4.29" (109mm)	4-lamp (T8)/3-lamp (T5HO)
40 Watt	99624	LVTH4CL40/850/3S/LED/MC	100-277V	5000K	80	5497	50,000	Yes (0-10V)	47.24" (1200 mm) x 4.29" (109mm)	3-lamp (T8)
80 Watt	99625	LVTH4CL80/850/3S/LED/MC	100-277V	5000K	80	10217	50,000	Yes (0-10V)	47.24" (1200 mm) x 4.29" (109mm)	4-lamp (T8)/3-lamp (T5HO)
40 Watt	99626	LVTH4CL40/850/3S/LED/EM	100-277V	5000K	80	5497	50,000	Yes (0-10V)	47.24" (1200 mm) x 4.29" (109mm)	3-lamp (T8)
80 Watt	99627	LVTH4CL80/850/3S/LED/EM	100-277V	5000K	80	10217	50,000	Yes (0-10V)	47.24" (1200 mm) x 4.29" (109mm)	4-lamp (T8)/3-lamp (T5HO)

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to operate past this point at decreased light levels. May not be compatible with all dimming systems, dimming performance may vary by system. Requires a 0-10V dimmer, with 2 additional wires for dimming control. Warranty - Commercial / Industrial: This product is warranted for 5 years from the date of purchase.




# Linear LED Vaportight High Performance Luminaire

## Dimensions

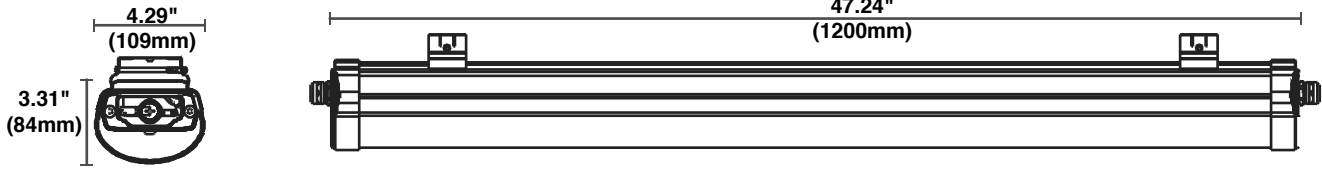

## Accessories


Motion/Photo Control Wireless Remote - LVTH4CLWR - 99629

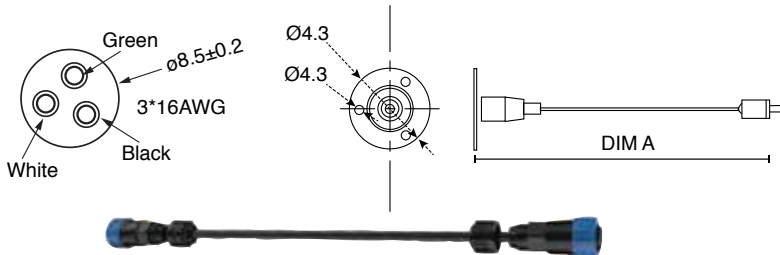

Linkable Cable - LVTH4CL/LC - 99630

## Photometrics

**Polar Candela Distribution Plot**  
LVTH4CL40/850/3S/LED

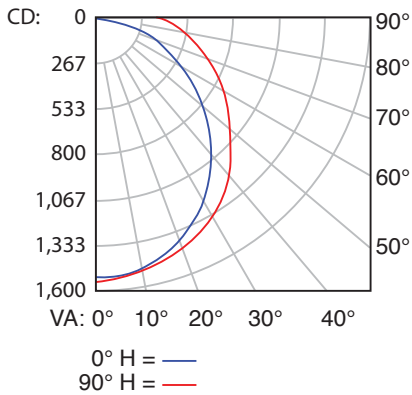


LUMENS PER ZONE					
ZONE	LUMENS	% TOTAL ZONE	LUMENS	% TOTAL	
0-10	144.5	2.7%	90-100	203.1	3.8%
10-20	411.9	7.7%	100-110	133.2	2.5%
20-30	619.7	11.6%	110-120	86.0	1.6%
30-40	742.9	13.9%	120-130	54.2	1%
40-50	774.1	14.5%	130-140	33.4	0.6%
50-60	721.8	13.5%	140-150	20.5	0.4%
60-70	605.5	11.4%	150-160	12.2	0.2%
70-80	453.7	8.5%	160-170	6.3	0.1%
80-90	307.7	5.8%	170-180	1.9	0%

ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	1,176.1	22.1%	22.1%
0-40	1,918.9	36%	36%
0-60	3,414.9	64.1%	64%
60-90	1,366.9	25.6%	25.6%
70-100	964.5	18.1%	18.1%
90-120	422.3	7.9%	7.9%
0-90	4,781.8	89.7%	89.7%
90-180	550.8	10.3%	10.3%
0-180	5,332.6	100%	100%

### ILLUMINANCE AT A DISTANCE

HEIGHT (FT)	CENTER BEAM FOOTCANDLE	BEAM SPREAD (FT)		FIELD SPREAD (FT)	
		HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
2.00	381.14 FC	8.3	5.0		18.7
4.00	95.29 FC	16.6	10.0		37.3
6.00	42.35 FC	25.0	15.0		56.0
8.00	23.82 FC	33.3	20.0		74.7
10.00	15.25 FC	41.6	24.9		93.4
		BEAM ANGLE		FIELD ANGLE	
		128.7°	102.5°	N/A	155.8°

**Polar Candela Distribution Plot**  
LVTH4CL80/850/3S/LED

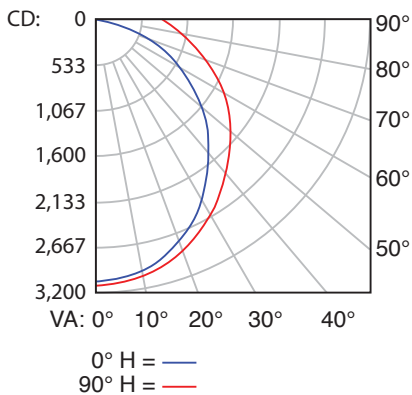

LUMENS PER ZONE					
ZONE	LUMENS	% TOTAL ZONE	LUMENS	% TOTAL	
0-10	290.5	2.8%	90-100	397.8	3.8%
10-20	827.1	7.9%	100-110	257.6	2.4%
20-30	1,240.6	11.8%	110-120	163.2	1.6%
30-40	1,479.5	14.1%	120-130	101.0	1%
40-50	1,530.8	14.5%	130-140	61.9	0.6%
50-60	1,417.3	13.5%	140-150	38.2	0.4%
60-70	1,185.1	11.3%	150-160	23.0	0.2%
70-80	891.1	8.5%	160-170	11.7	0.1%
80-90	606.8	5.8%	170-180	3.4	0%

ZONAL LUMEN SUMMARY			
ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	2,358.2	22.4%	22.4%
0-40	3,837.6	36.5%	36.5%
0-60	6,785.7	64.5%	64.5%
60-90	2,683.0	25.5%	25.5%
70-100	1,896.7	18%	18%
90-120	818.5	7.8%	7.8%
0-90	9,468.7	90%	90%
90-180	1,057.7	10.1%	10%
0-180	10,526.4	100%	100%

### ILLUMINANCE AT A DISTANCE

HEIGHT (FT)	CENTER BEAM FOOTCANDLE	BEAM SPREAD (FT)		FIELD SPREAD (FT)	
		HORIZONTAL	VERTICAL	HORIZONTAL	VERTICAL
2.00	768.78 FC	8.2	4.8		18.3
4.00	192.19 FC	16.4	9.7		36.7
6.00	85.42 FC	24.6	14.5		55.0
8.00	48.05 FC	32.8	19.3		73.3
10.00	30.75 FC	41.0	24.2		91.7
		BEAM ANGLE		FIELD ANGLE	
		128.0°	100.7°	N/A	155.4°