

LT56 LED Retrofit
Baffle-Trim Module

HALO





EATON

Powering Business Worldwide

LT56



- Up to 687 lumens
- Use to replace 65W BR30 or 50W PAR30 lamp
- 3000K Correlated Color Temperature (CCT)
- 90 CRI
- 10.2W
- Halo matte white finish
- Torsion springs pre-installed
- Compatible with most 5" / 6" recessed housings
- Includes Edison base adapter
- Dimmable to 10% with select dimmers
- Damp and wet location listed (shower rated)
- Rated for IC, ICAT and may be used in Non-IC housings
- AIR-TITE™ certified per ASTM-E283
- Diffusing, regressed lens
- Five-year limited warranty

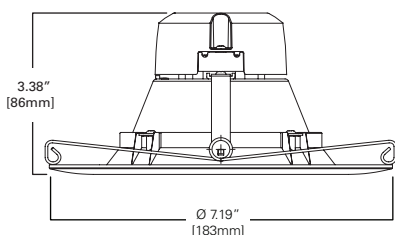

^A Savings are over the life of the Halo LT56 luminaire.

Energy savings: \$300

Replacement lamp savings: \$54

Savings based on \$0.155 per kilowatt hour and 6 hours average use per day and 35,000 hours of lamp usage, 65W BR30 lumen equivalent.

5"/ 6" LED Retrofit Downlight

Ordering Information

Sample Number: **LT560WH6930**
Order Halo housing separately.
LT56 – 5"/6" LED Retrofit Baffle - Trim
90 CRI
LT560WH6930= 90 CRI, 3000K, Matte White

Accessories (Order Separately)

HE26LED=Replacement screw base adapter (one included with unit)



Energy Data

Max. Lumens (3000K)	687
Input Voltage	120V
Input Frequency	60 Hz
Input Power	10.2W
Input Current	0.085A
Power Factor	≥ 0.90
THD	≤ 24%
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Consumer)
Sound Rating	≤ 22 dba
T Ambient	-30°C (-22°F) to 40°C (104°F)



Refer to
ENERGY STAR®
Certified Products List.

90 CRI



Can be used to comply with California
Title 24 High Efficacy requirements.
Certified to California Title 20 Appliance
Efficiency Database.



Housing Compatibility


LT56 LED are rated for installation in 5" and 6" HALO®, All-Pro™ and other housings.

Halo 5" LED	H550ICAT, H550RICAT (Non-screw base, high-efficacy code compliant)
Halo 6" LED	H2750ICAT, H750ICAT, H750T, H750TCP, H750RICAT (Non-screw base, high-efficacy code compliant)
Halo 5"	H5T, H5RT, H5TM, H5ICAT, H5RICAT, H25ICAT
Halo 6"	H7ICT, H7ICAT, H7T, H7ICATNB, H7ICTNB, H7TNB, H7UICAT, H7UICT, H7TCP, H7RICAT, H7RICT, H7RT, H27T, H27RT, H27ICAT, H27ICT, H27RICAT, H27RICT
Halo LED Retrofit	ML7BXRFK, ML7E26RFK
All-Pro 5"	EI500AT, EI500RAT, ET500, ET500R
All-Pro 6"	EI700, EI700AT, EI700ATNB, EI700U, EI700UAT, EI700NB, EI700R, EI700RAT, ET700, ET700R, EI2700, EI2700AT, EI2700R, ET2700, ET2700R
Other Brands*	The LT Series is cULus Listed or UL Classified for use with any 5"/6" diameter recessed housing constructed of steel or aluminum with an internal volume that exceeds 107.9 in ³ in addition to those noted above.

*When using LT56 torsion springs for retrofit some housings will not have torsion spring receiver brackets –use Halo ML7RAB retrofit adapter band (order separately)


H750ICAT

6" LED, IC, AIR-TITE, Standard New Construction Housing

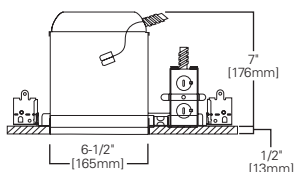


H2750ICAT

6" LED, IC, AIR-TITE, Shallow New Construction Housing

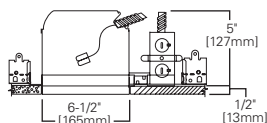

H750RICAT

6" LED, IC, AIR-TITE, Standard Remodel Housing

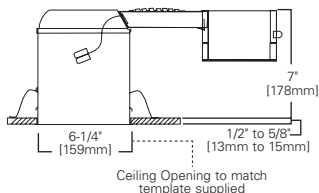

Lighting Control Solution

Eaton dimmers offer versatile options to set the mood and reduce energy consumption. These compatible LED dimmers are ideal for both residential and light commercial applications and are compatible with decorator (screwless) style devices and wallplates.

Refer to www.eaton.com for additional information.



Smart
(AAL06)



Decorator
(DAL06P)



Slide
(SAL06P)



Toggle
(TAL06P)



Eaton

1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Our Lighting Product Lines

Halo
Halo Commercial
Portfolio
IRiS
RSA
Metalux
Corelite
Neo-Ray
Fail-Safe
MWS
Ametrix
Shaper
io
Lumark
McGraw-Edison
Invue
Lumière
Streetworks
AtLite
Sure-Lites

Our Controls Product Lines

Greengate
iLumin
Zero 88
Fifth Light Technology
iLight (International Only)

Eaton

1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.eaton.com/lighting

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. BR518017EN
December 2015

Products, specifications and
compliances are subject to
change without notice.

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.



Powering Business Worldwide