



Ceiling Fan with Lights

Installation & Troubleshooting Manual

## **CAUTION**

READ INSTRUCTIONNS CAREFULLY FOR SAFE  
INSTALLATION AND FAN OPERATION

---

The first step in the installation of the product is to check whether there is fallen off or poor contact of the wireline, then check the electricity and remote control of the product on the ground. If everything is ok, install the product on the ceiling.

1. Adults, children, and the elderly should not touch the fan blades when the fan is powered on or energized.

Please keep a safe distance and height from the fan.

2. If the fan has a burning odor during operation, please turn off the power to prevent leakage accidents.

## ■ Kind reminder

1. If the remote control fails to control the light and fan, please check whether the battery is installed correctly or replace the battery and test again! Then check whether there is fallen off or poor contact of the wireline inside the base!

2. If the remote control suddenly cannot be used, please check the code first (refer to the manual of the remote control or contact online customer service by email)! If the problem still exists after checking the code, please contact the Seller to send a new controller accessories.

## •Maintenance and cleaning

After the product has been used for a period of time, it can be cleaned with a cloth dipped in detergent, and then wiped with a dry cloth.

## •Warning:

If it is necessary to remove the fan blade for cleaning, professional electrician must be there to assist the installation so as to prevent falling injury caused by unstable installation of the blade!

## •Kind reminder

If you do not use the fan or turn on and off the light for a long time, please energize on the product regularly to extend the service life of the product!

## ■ Important safety instructions

---

## SAFETY RULES

1. To reduce the risk of electric shock, turn off the electricity to the fan at the main fuse box or circuit panel before beginning.
2. All wiring must be in accordance with the local electrical codes or National Electrical Code. Electrical installation should be performed by a qualified licensed electrician.
3. To avoid personal injury, the use of gloves may be necessary while handling fan parts with sharp edges.
4. Make sure the installation site you choose allows clear space for the blades to rotate and at least 6.5 feet of clearance between the floor and the fan blade tips.
5. **WARNING:** To reduce the risk of fire, electric shock, or personal injury, mount fan only to an outlet box marked acceptable for fan support and use mounting screws provided with the outlet box. Most outlet boxes commonly used for the support of lighting fixtures are not acceptable for fan support and may need to be replaced. Consult a qualified electrician if in doubt.
6. The outlet box and ceiling support structure must be securely mounted and capable of supporting at least 10 KGS.
7. To avoid personal injury or damage to the fan and other items, be cautious when working around or cleaning the fan.
8. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened cloth will be suitable for most cleaning.
9. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
10. Electrical diagrams are for reference only.
11. The fan is more suitable for indoor use.

## TOOLS REQUIRED



---

# PRODUCT OVERVIEW

Unpack your fan and check the contents. You should have the followings:

- ① Ceiling Fan Light X1
- ② Bracket X1
- ③ Accessories Package X1 (4x Expansion Screw, 4 x Wire Nut)
- ④ Product Manual X1
- ⑤ Remote Control X1

Note: Please Day to the accessory bg before  
throwing away the carton and foam. The accessory bag oeneraiiy  
be placed into the cave of the foam corner.

1



2



3




4

**Instruction  
Manual**

5

**The remote  
control  
Instruction**

# INSTALLATION DIAGRAM

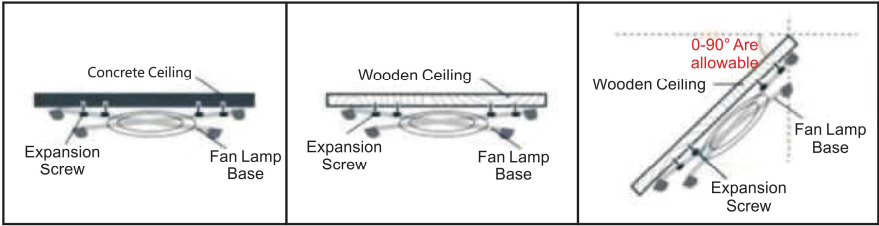

Standard Ceiling Installation	Decorative Ceiling Installation	Sloped Ceiling Installation
General guideline is available for concrete ceiling.	The decorative ceiling(wooden) must be reinforced to be able to bear the weight of 10kg. And the thickness of the board shall be less than 1.18 inches. Ptease reinforce it in advance before installation.	No angled limited. As long as you like, beyond your imagination. If you want to enjoy downward airflow, angle ranging from 0-2. ° is recommended.

## Circuit Diagram


Live Wire (Black)

Neutral Wire (White)

Earth Wire (Yellow)

Note: The black wire and white wire can be interchangeably connected to the junction box which does not affect the performance of fan/light. And it is also safe.

Remote control available only when fan/light powered on from wall switch.

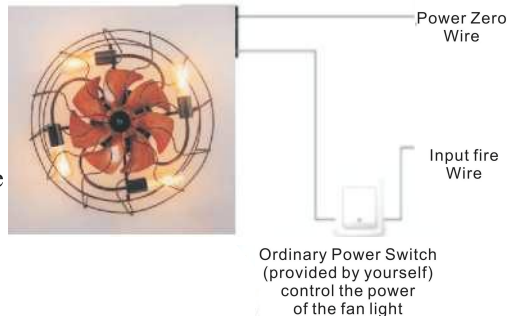







The content of this manual has been checked carefully! If you find any misprints or if you have any misunderstanding of the content, please contact us by email! Any technical improvements about the product will be included in the new edition of the manual without further notice! If the appearance or color of the product is found changed, please refer to the object in kind! Thank you!