

# Barn Light Dome & Barn Light I Light Pendant

6236701, 6237401 | 1.0

## GENERATION LIGHTING

### Pendant

#### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.



This instruction shows a typical installation.

#### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

**SAVE THESE INSTRUCTIONS!**

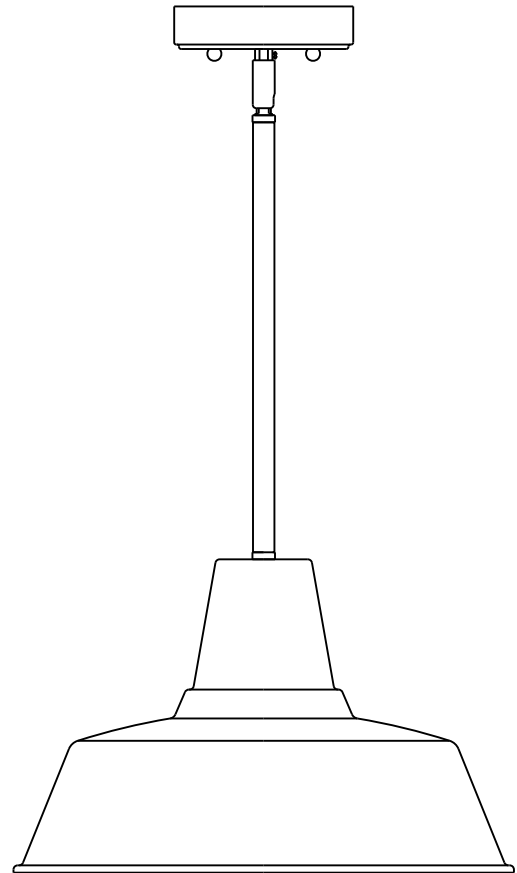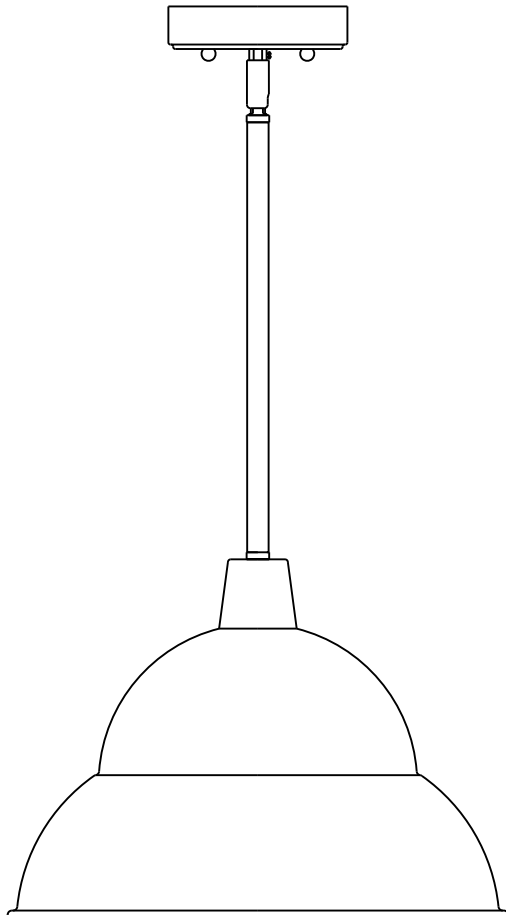


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.generationlighting.com

## Install the Fixture

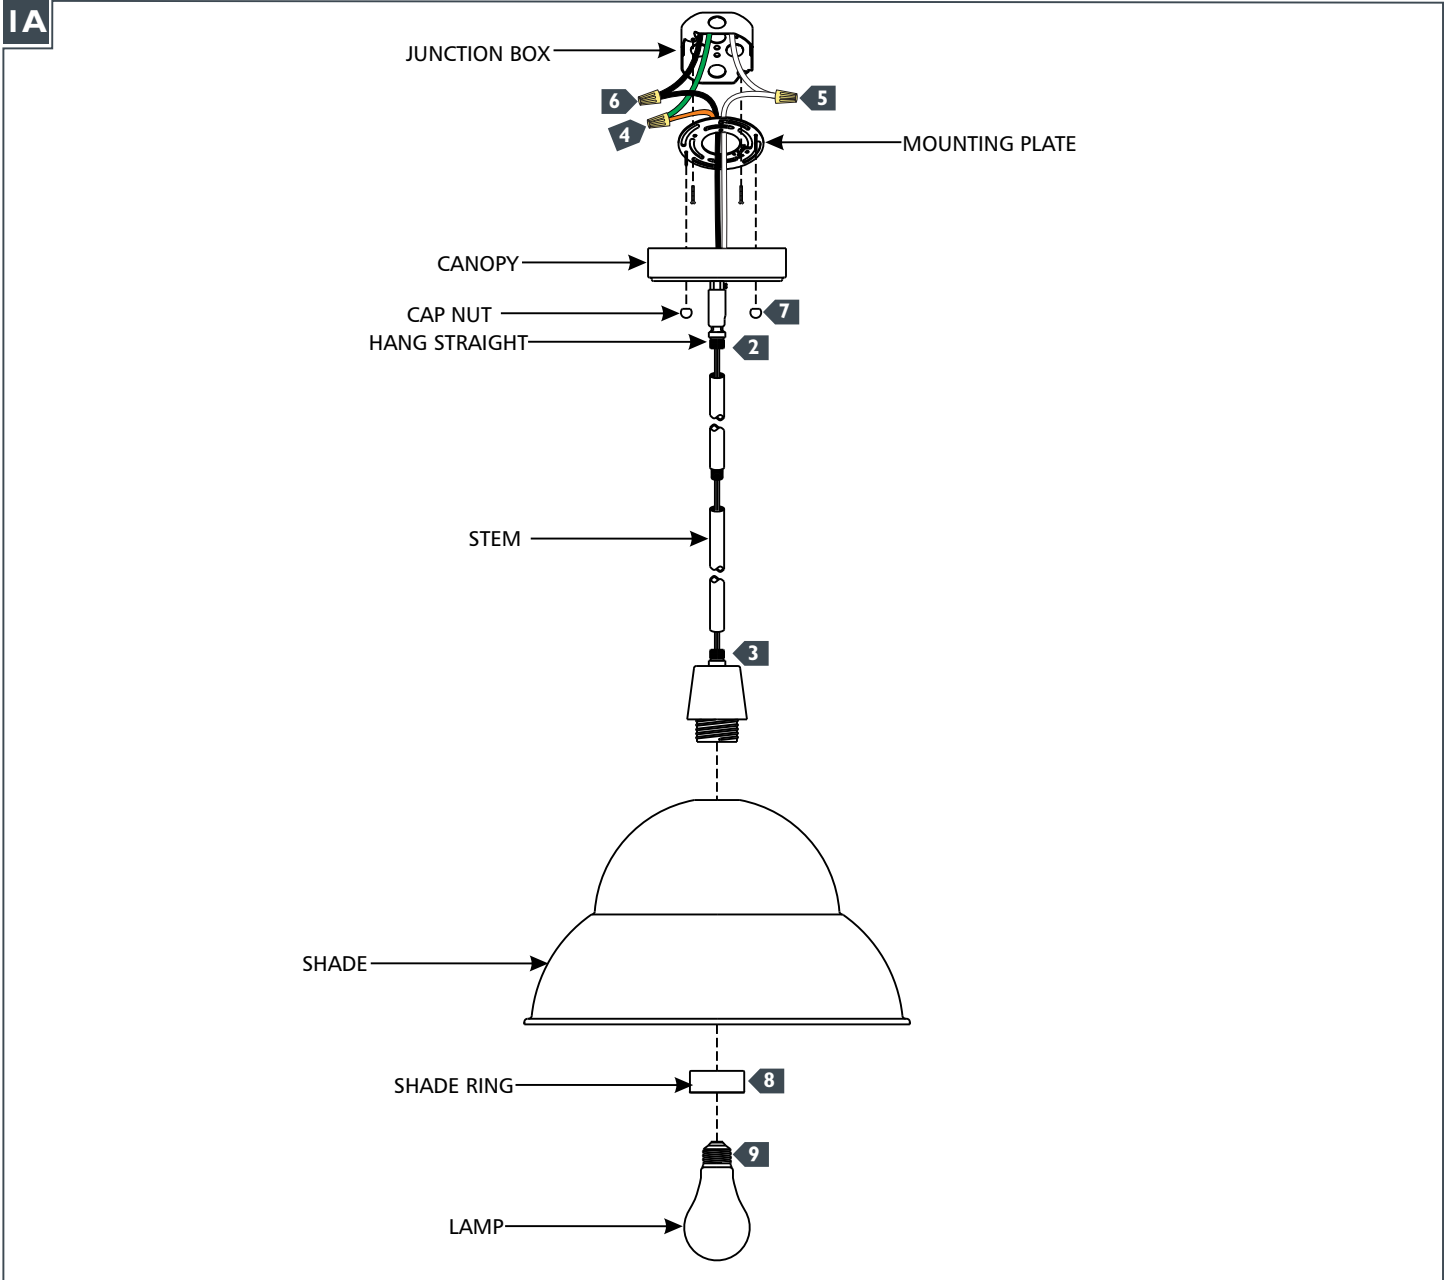

- 1** Secure the mounting plate to the junction box.
- 2** Assemble the stems to the desired length then screw the top of the stem to the hang straight on the canopy.
- 3** Feed the fixture wires through the stem and canopy, then screw the stem assembly tightly to the socket assembly.
- 4** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 5** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7** Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place with cap nuts.
- 8** Install the shade onto the socket and secure it in place with the socket ring.
- 9** Screw the lamp in to the socket. Refer to the label on the socket for Max Wattage information.