# Quick
# Start Guide

## Kidde Wire-Free Alarm Network Setup

**Please Read All Instructions First!**

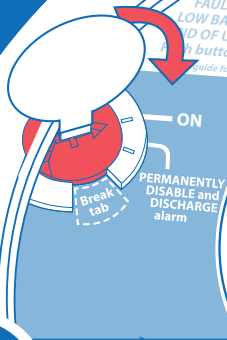Kidde

Section 1
**Quick Start Wire-Free Network Setup**

Section 2
**Adding a Device to an Existing Network**

Section 3
**Resetting a Device**

SMOKE ALARM: 3 long beeps, repeating
CO ALARM: 4 quick beeps, repeating
STANDBY: Green LED blink every 60s
FAULT: Amber LED blink every 60s
LOW BATTERY: Amber LED blink with chirp ev...
END OF UNIT LIFE: Amber LED blink every 5...
...sh button to test weekly.

...guide for more information

**ACTIVATION TOOL**

ON

PERMANENTLY
DISABLE and
DISCHARGE
alarm

Break
tab

## 1 Power Up **All** Devices

**Locate the red wheel on the back of the device.
Turn the red wheel to the "ON" position on ALL
devices using the included tool.**

Once powered, the light rings
will glow red.

*"Searching for other devices."*

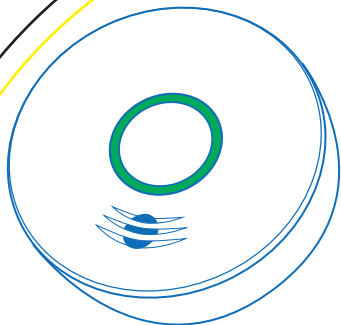**Hold for 5 seconds**

**DON'T press buttons on other devices**

# 2 Pick **One** Device

**Press & hold the button on only <u>ONE</u> device until you hear 2 beeps. Release button. You will hear "Searching for other devices."**

The light will pulse green and device will sound a continuous "sonar" ping until step 4 is completed.

*"Success, now connected!"*

## 3 Relax and Wait

**Wait until all devices have connected to network.
Once connected, each device will speak:
"Success now connected!"**

Once connected, the lights will
glow green.

**Hold for 5 seconds**

# ④ Pick **One** Device

**Press & hold the button on only ONE device until you hear 2 beeps. Release button. "Sonar" ping will stop.**

Device will announce that setup is complete and the number of connected devices.

# 5 Setup Complete!

**If all devices flash green and the "sonar" ping has stopped, the devices are now connected.  Congratulations!**
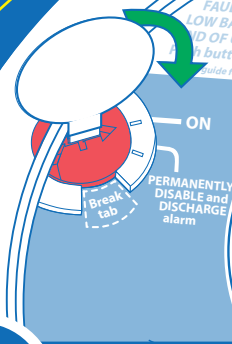
Please mount alarms in your home. Refer to user guide for detailed installation instructions.
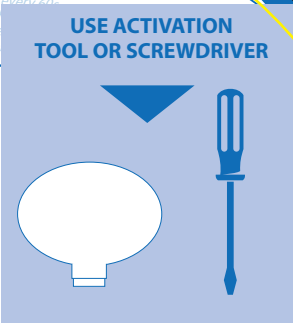
Section 2
**Adding a Device
to an Existing Network**

SMOKE ALARM: 3 long beeps, repeating
CO ALARM: 4 quick beeps, repeating
STANDBY: Green LED blink every 60...
FAULT: Amber LED blink with c...
LOW BATTERY: Amber LED blink e...
END OF UNIT LIFE: Amber LED blin...
...sh button to test weekly.
...Guide for more information

ON

PERMANENTLY
DISABLE and
DISCHARGE
alarm

Break
tab

**USE ACTIVATION
TOOL OR SCREWDRIVER**

# 1 Power Up __New__ Device

**Locate the red wheel on the back of the device being added to the network.  Using the activation tool or a standard screwdriver, turn the red wheel to the "on" position.**

Once powered, the light ring
will glow red.

"Searching for other devices."

**Installed Device**     **Device Being Added**

# 2 Pick **One Installed** Device

**Press & hold the button on only <u>ONE INSTALLED</u> device on your network until you hear 2 beeps. Release button. You will hear "Searching for other devices."**

The light will pulse green and device will sound a continuous "sonar" ping until step 4 is completed.

*"Success, now connected!"*

## 3 Relax and Wait

**Wait until the new device has connected to the network. Once connected, the new device will speak: "Success now connected!"**

Once connected, the light ring will glow green.

"Setup complete!"

**Installed Device**       **Added Device**

**④ Pick the Installed Device**

**Press & hold the button on the INSTALLED device for 5 SECONDS until you hear 2 beeps. Release button. "Sonar" ping will stop.**

Device will announce that setup is complete and the number of connected devices.

Section 3
# Resetting Your Device

If you encounter an issue at any point
during the wire-free network setup process,
you may reset the device by following
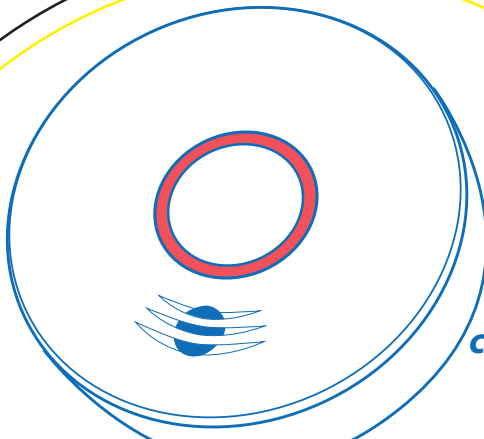the subsequent directions.

*"Resetting wireless settings."*

Hold for 8-9 seconds

## ① Resetting the Device

**Press & hold the button on the device for 8-9 seconds until you hear 3 beeps. Release button. You will hear the words "Resetting wireless settings."**

*"Ready to connect, follow Quick Start instructions!"*

## ② Resetting the Device

**Light ring will flash green once and then it will pulse red. You will hear the words "Ready to connect, follow quick start instructions."**

Device has been reset.

Need more help
getting started?

Visit **kidde.com/wirefreealarms**
to view video tutorials or scan the
QR code below.

# Kidde

United Technologies

*Consult the User Guide for more detailed
instructions on product installation and use.*

2556-7203-00 Rev A