



Compatibility Guide
Electric Baseboard Heater Cover Kit



Safety is Our Priority

These instructions are intended to supplement the installation instruction manuals provided with your heater and thermostat. For questions regarding your electric baseboard heater's instructions and safety warnings, please refer to the owner's manual provided by the manufacturer.

 CAUTION	 FIRE HAZARD	 BURN HAZARD
High temperature. Keep electrical cords, drapes, and other furnishings away from heater and heater cover by 12 inches.	Do not place objects, furniture, or anything flammable within 12 inches of the electric baseboard cover.	Do not touch while unit is heating. To avoid burns, do not touch the hot surface with bare skin.


Compatibility Guide

Use the step-by-step compatibility guide to determine if your electric baseboard heater is compatible with our Electric Baseboard Cover Kit. If it does not meet the requirements, then do not use the kit. A ¼ inch of space must be maintained between the electric baseboard heater and the baseboard heater cover.

Step 1: Thermostat Placement

On Wall	On Electric Heating Unit
Compatible: thermostat located on a wall. Proceed to Step 2!	Not Compatible: thermostat located on the electric heating unit. <i>Note: The cover's panel would need to be removed to adjust the thermostat if used together.</i>
	

Step 2: Determine Electric Unit's Height & Depth

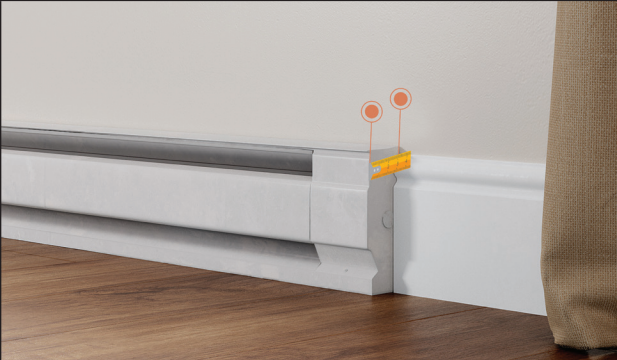
Measure Height	Measure Depth
From the finished floor to the top of the unit	From the front to the back of the unit
	
Compatible: Measure from the floor to the top of the unit. Our kit for electric baseboard heater covers will fit measurements of 8-1/4 inches high or less. Note: Maintain a 1/4 inch of space between the heating unit and the cover.	Compatible: Measure from the back wall to the front of the unit. Our kit will fit 2-3/4 inch depth or less, depending on the height of the electric baseboard unit. See next section "Profile View".
Not Compatible: If your electric heater is taller than 8-1/4 inches, it is NOT compatible with our cover.	Not Compatible: If your electric heater is deeper than 2-3/4 inches, it is NOT compatible with our cover.

Profile View

The Electric Baseboard Cover Kit is compatible with electric baseboard heaters that are either:

- 6 inches or less in height and 2-3/4 inches or less in depth, or
- 8-1/4 inches or less in height and 2-1/8 inches or less in depth

Note: a 1/4 inch of space between the heating unit and the cover must be maintained.

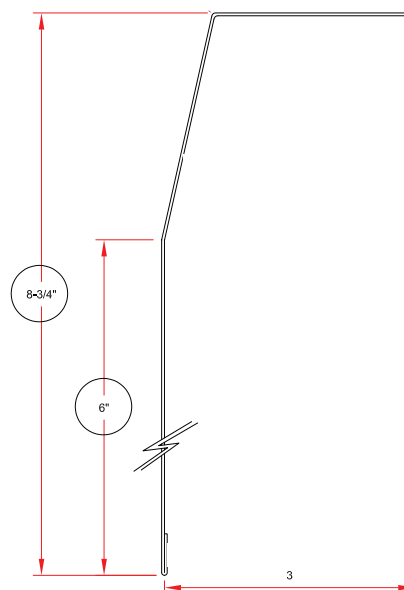

Step 3: Measure Panel Length

Measure from end to end.



Compatible: Measure from end to end. Our kit for electric baseboard heater covers will fit measurements of 75 inches long or less.

Not Compatible: If your electric heater is longer than 75 inches, it is NOT compatible with our cover. Note: a ¼ inch of space between the heating unit and the cover must be maintained.

Longer than 75 inches? Contact us at 844.801.6429 or sales@baseboarders.com.

Step 4: Determine Panel Length

Electric Unit Panel Length	Cover Panel Length	SKU	Kit Components
36 inches or less	36 inches	EL-BB003-36-EC007-KIT	(1) 36 inch panel, (2) closed end-caps, (2) wall brackets
36.01 – 48 inches	48 inches	EL-BB003-48-EC007-KIT	(1) 48 inch panel, (2) closed end-caps, (2) wall brackets
48.01 – 60 inches	60 inches	EL-BB003-60-EC007-KIT	(1) 60 inch panel, (2) closed end-caps, (2) wall brackets
60.01 – 75 inches*	72 inches	EL-BB003-72-EC007-KIT	(1) 72 inch panel, (2) closed end-caps, (3) wall brackets

*Note: Each Baseboarders endcap can slide out 1-3/4 inches, providing an additional 3-1/2 inches in length, if needed.

Don't see your size? Contact us at 844.801.6429 or sales@baseboarders.com.