




Item #1001 309 246
Model #AC421LKLED

USE AND CARE GUIDE

UNIVERSAL CEILING FAN LED LIGHT KIT

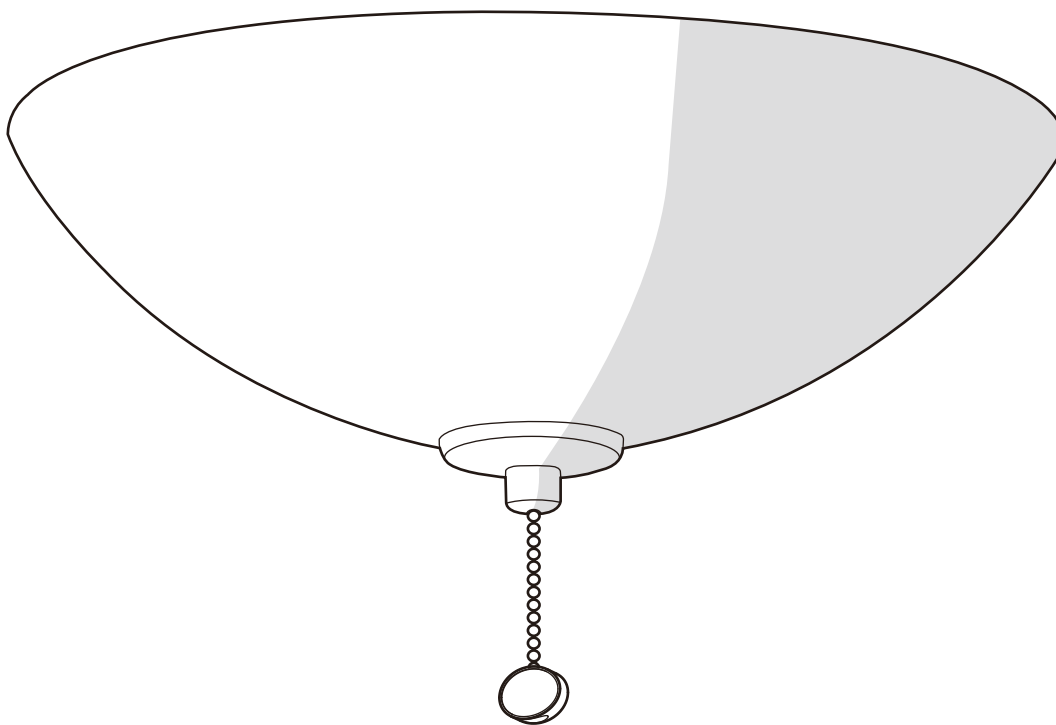

Questions, problems, missing parts? Before returning to the store,
call Hampton Bay Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST Saturday

1-855-HD-HAMPTON

HAMPTONBAY.COM

THANK YOU

We appreciate the trust and confidence you have placed in Hampton Bay through the purchase of this light kit. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs.

Thank you for choosing Hampton Bay!

Table of Contents

Table of Contents	2	Pre-Installation	4
Safety Information	2	Installation.....	5
Warranty	3		

Safety Information

READ AND SAVE THESE INSTRUCTIONS.



CAUTION: To reduce the risk of electrical shock, before starting installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning the power off using the fan switch is not sufficient.



CAUTION: To avoid accidental burning, allow the glass shade to cool completely before touching or replacing the glass shade.



CAUTION: To reduce risk of electrical shock, do not install this light kit in damp or wet locations. This light kit is suitable for indoor use only.



CAUTION: To reduce the risk of electrical shock, this light should be used only with the fan models listed below:
Model: AC-552 (SKU# 172-503, 170-721, 171-348)
Manufactured by company: Air Cool Industrial Co, Ltd.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



WARNING: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warranty

The supplier warrants the light kit to be free from defects in workmanship and material present at time of shipment from the factory for two years after the date of purchase by the original purchaser. The supplier also warrants that all other light kit parts, excluding any glass, to be free from defects in workmanship and material at the time of shipment from the factory for a period of two years after the date of purchase by the original purchaser. We agree to correct such defects without charge or at our option replace with a comparable or superior model if the product is returned. To obtain warranty service, you must present a copy of the receipt as proof of purchase. All costs of removing and reinstalling the product are your responsibility. Damage to any part such as by accident, misuse, improper installation or by affixing any accessories, is not covered by this warranty. Because of varying climatic conditions this warranty does not cover any changes in brass finish, including rusting, pitting, corroding, tarnishing, or peeling. Brass finishes of this type give their longest useful life when protected from varying weather conditions. Servicing performed by unauthorized persons shall render the warranty invalid. There is no other express warranty. Hampton Bay hereby disclaims any and all warranties, including but not limited to those of merchantability and fitness for a particular purpose to the extent permitted by law. The duration of any implied warranty which cannot be disclaimed is limited to the time period as specified in the express warranty. Some states do not allow a limitation on how long an implied warranty lasts, so the above limitation may not apply to you. The retailer shall not be liable for incidental, consequential, or special damages arising out of or in connection with product use or performance except as may otherwise be accorded by law. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives specific legal rights, and you may also have other rights which vary from state to state. This warranty supersedes all prior warranties. Shipping costs for any return of product as part of a claim on the warranty must be paid by the customer.

Contact the Customer Service Team at 1-855-HD-HAMPTON or visit www.hamptonbay.com.



Pre-Installation

TOOLS REQUIRED



Phillips
screwdriver



Electrical
tape





Wire
cutter



Step
ladder

PACKAGE CONTENTS

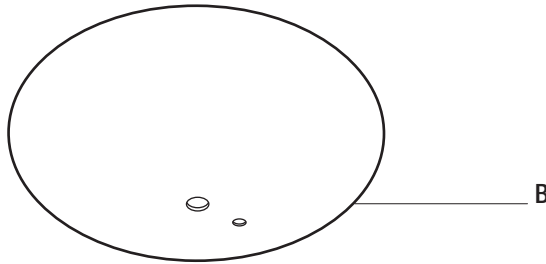

Part	Description	Quantity
A	14w LED light kit assembly	1
B	Glass shade	1

HARDWARE INCLUDED




Part	Description	Quantity
AA	Nut (not to scale)	1
BB	Lock washer (not to scale)	1
CC	Rubber washer (preassembled)	1
DD	Glass secure nut (preassembled)	1
EE	Glass cap (BN/ORB/WH) (not to scale)	3
FF	Decorative nut (BN/ORB/WH) (not to scale)	3

Assembly - Installing the Light Kit


1 Preparing the fan

- Remove the switch housing cover (D) from the switch housing (C) below the fan by removing the three switch housing mounting screws.
- Remove the plastic plug from the switch housing cover (D).

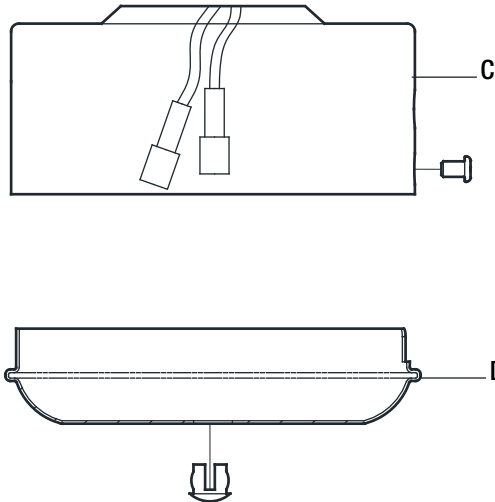

2 Preparing the light kit

- Route the light kit wires (black and white) (GG) through the hole of the switch housing cover (D).
- Screw the switch housing cover onto the light kit stem and fasten by using the lock washer (BB) and nut (AA). Be sure it is tight enough to prevent the light kit from vibrating loose.

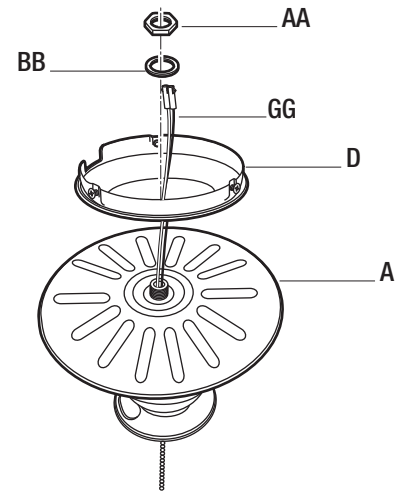


3 Attaching the light kit to the switch housing



CAUTION: Before starting the installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning power off using the fan switch is not sufficient to prevent electric shock.

- While holding the 14w LED light kit (A) under your fan motor assembly, locate two single white and blue wires (HH) in the switch housing labeled "FOR LIGHT". Make the polarized plug connections:
 - White to white
 - Black to black
- Carefully push all wires back into the switch housing. Install the LED light kit (A) onto the switch housing with the three switch housing mounting screws provided. Be sure to tighten all screws.

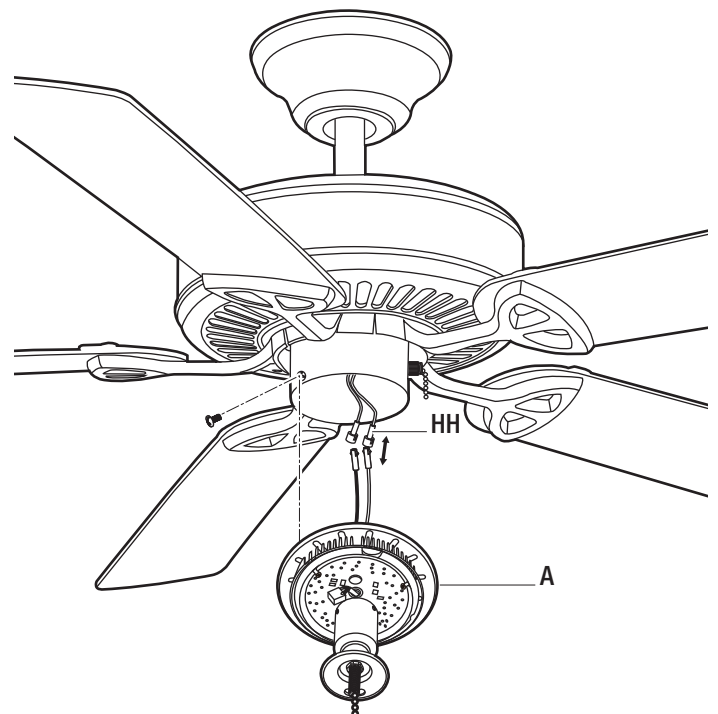


4 Installing the glass shade



CAUTION: Before starting installation, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box. Turning power off using the fan switch is not sufficient to prevent electric shock.

- Remove the glass secure nut (DD) and rubber washer (CC) from the light kit stem and keep for later use.
- Place the glass shade (B) over the light kit stem and secure with the rubber washer (CC), glass secure nut (DD), glass cap (EE) and decorative nut (FF). Do not overtighten.
- Insert the two pull chains (II) through the eyelet in the glass shade (B) and glass cap (EE).
- Install two pull chains and fobs (JJ) (not included) onto the pull chains located in the switch housing (C) and 14w LED light kit (A). Turn on the power and check the operation of the light kit.

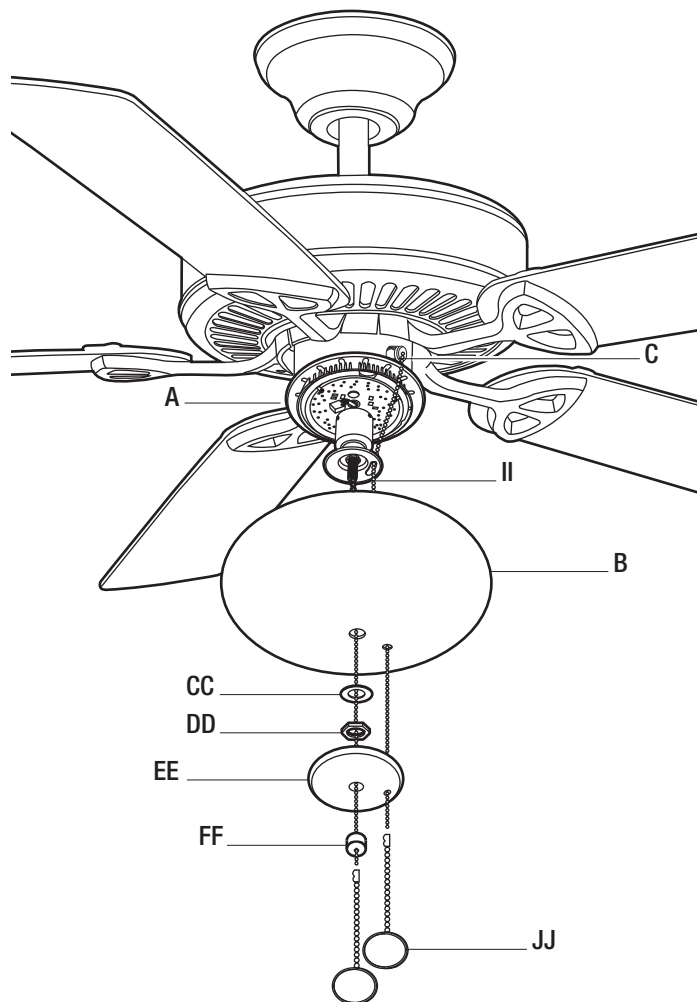



Questions, problems, missing parts? Before returning to the store,
call Hampton Bay Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST Saturday

1-855-HD-HAMPTON

HAMPTONBAY.COM

Retain this manual for future use.

Net weight 2.78 lbs (1.26 KG)