

SolarGoesGreen SGG-S24-FLPL

READ AND FOLLOW ALL INSTRUCTIONS BEFORE OPERATING YOUR SOLAR LIGHT.
SAVE THIS MANUAL FOR FUTURE REFERENCE.



DESCRIPTION

The SGG-S24-FLPL is designed as a stand-alone flag pole light which automatically illuminates at dusk. It is completely solar powered and must be installed in position where the solar panel will receive the maximum sun per day. It's energy-saving, auto switches on/off, and has an appealing design.

The unit has twin spotlights with 12 super bright LEDs and two Li-ion rechargeable batteries which are easily replaced. The SGG-S24-FLPL can easily be installed on poles as narrow as 3".

PARTS




Solar panel with integrated battery box
2 each- 12 Super Bright LED lamps
2 each - Pole mounts

INSTALLATION

I. Solar Flagpole Light

INSTALLATION OF THE SOLAR PANEL

- Choose a place to locate the unit where there is abundant and unobstructed sunshine during the day. Any cover or shade on the solar panel will affect its performance to charge the batteries resulting in a shorter run time of the lights during the night (Fig.1). IDEAL LOCATION OF THE SOLAR PANEL WILL BE FACING SOUTH AT A 45 DEGREE ANGLE TO THE HORIZON.
- Take off the adjustable arm part of LED lamp. Remove and save the machine fine threaded screw for future use. (Fig.9)
- Attach lamp to pole black PVC mount base by using coarse threaded screw provided.
- Mount Solar Panel to pole mount base using provided butterfly nut (Fig.10). Adjust lamp initial aiming direction before fixing it.
- Attach the pole light unit to flagpole by using stainless steel clamps. There are different sizes of clamps suitable for different size of flagpole. (Fig.11)
- After installation, connect spotlight wire with solar panel wire and switch the unit on the solar panel. The light will automatically be operational when the panel detects that it's dark enough.

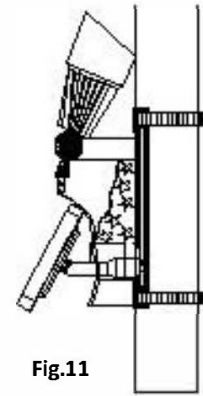

NOTES AND TROUBLESHOOTING

- If there is not enough sunlight on the solar panel, the unit may not charge, please ensure that the unit is placed in a position where there is at least 8-10 hours of direct unobstructed sunlight a day.
- If there is too much ambient light in darkness, the unit will not activate as it will assume that it is not dark enough.
- Please keep the solar panel clean by wiping it once every few months with a damp cloth or paper towel. Don't use strong detergents or acid based cleaners.
- Rainy and cloudy conditions over continuous days will also affect the charging ability of the light.
- **PLEASE NOTE THIS UNIT CHARGES IN THE ON POSITION. (--) LINE DEPRESSED INTO PANEL**
- **IF LIGHT WILL NOT ILLUMINATE AFTER 2 SUNNY DAYS, UNPLUG LIGHT FROM SOLAR PANEL, LEAVE PANEL SWITCH IN ON POSITION AND CONTINUE TO CHARGE LIGHT.**
- **RE-ATTACH LIGHT AND RESUME OPERATION AS NORMAL. IF LIGHT STILL WILL NOT WORK, REPLACE BATTERY.**

BATTERY REPLACEMENT – To access battery compartment use Phillips #2 Screw Driver.

The battery is 2 each of 3.7V 2000 mAh Li-ion rechargeable battery which is easily replaceable. If the spot light begins to illuminate dimly or for short durations of time and you know that it has had sufficient sunlight on the panel in order to charge, you should replace the battery in the following way:

1. Unscrew the battery cover on the back of solar panel box and take out the old battery carefully without damaging the cables.
2. Replace the new battery and re-mount the unit.

WARNING – Polarity is very important. Switching polarity on the unit is dangerous and will destroy the unit.



FLPLw.solarGoesGreen.com

UPC 850901003712