


USE AND CARE GUIDE

SMART TUNABLE LED PUFF LIGHT

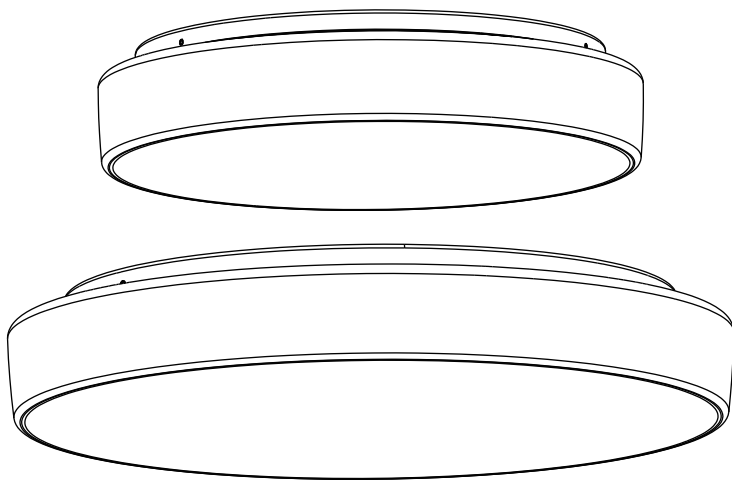

Questions, problems, missing parts? Before returning to the store,
call Commercial Electric Customer Service
8 a.m. - 7 p.m., EST, Monday – Friday, 9 a.m. – 6 p.m., EST, Saturday

1-877-592-5233

[HOMEDEPOT.COM/HUBSPACE](https://www.homedepot.com/hubspace)

THANK YOU

We appreciate the trust and confidence you have placed in Commercial Electric through the purchase of this lighting fixture. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Commercial Electric!

Table of Contents

Table of Contents	2
Safety Information	2
FCC Regulation	2
Wireless Protocol	3
Warranty	3
What is covered	3
What is not covered	3

Pre-Installation	4
Planning Installation	4
Installation	5
Operation	6
Care & Cleaning	7
Troubleshooting	7
Compatibility	8

Safety Information

WARNING: PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE.

Carefully read and understand the information given in this manual before beginning the assembly and installation. Failure to do so could lead to electric shock, fire or other injuries which could be hazardous or even fatal.

- Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



WARNING: Risk of fire or electric shock. Lighting fixture installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.



WARNING: To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.



WARNING: Only use the control provided with or specified by these instructions to control this flush mount. This flush mount will not operate properly when connected to a standard (incandescent) dimmer or dimming control.

NOTICE: Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.

NOTICE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTICE: Not compatible with dimmers. Only can be dimmed by Hubspace App., Google Assistant, Alexa. Dimming range is 5%–100%

FCC Regulation

Supplier's Declaration of Conformity

47 CFR § 2.1077 Compliance Information

Responsible Party

Leedarsen America, Inc. 300 Technology Court SE Suite 100; Smyrna, GA 30082 1-678-293-8382

Unique Identifier: CD44bRGBW11W CD44bRGBW15W

Contains FCC ID: 2AB2Q-LA02301

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and any part of your body. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Wireless Protocol

The Wi-Fi CERTIFIED™ Logo is a certification mark of Wi-Fi Alliance®. Apple and the Apple logos are trademarks of Apple, Inc., registered in the U.S., and other countries. App Store is a service mark of Apple Inc. Google, Google Play and the Google Play logo are trademarks of Google LLC.



Warranty

WHAT IS COVERED

The manufacturer warrants this lighting fixture to be free from defects in materials and workmanship for a period of five (5) years from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alterations, neglect or mishandling.

WHAT IS NOT COVERED


This warranty shall not apply to any product that is found to have been improperly installed, set up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, or faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the product, such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor / expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-877-592-5233 or visit www.HOMEDEPOT.COM/HUBSPACE.

Pre-Installation

PLANNING INSTALLATION



WARNING: Shut off power at the circuit breaker or fuse panel before removing the old fixture.

Read all instructions before assembly. Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. To avoid damaging this product, assemble it on a soft, non-abrasive surface such as carpet or cardboard.



NOTE: Keep your receipt and these instructions for proof of purchase.

TOOLS REQUIRED



Wire Strippers



Safety Goggles



Ladder



Gloves



Flathead Screwdriver



Phillips Screwdriver



Electrical Tape



Wire Cutters

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.



AA



BB


Part	Description	Quantity
AA	Wire nut	3
BB	Mounting screw	2

PACKAGE CONTENTS

A



B

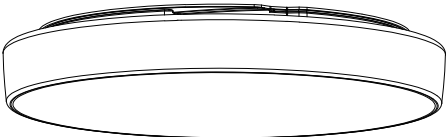


Part	Description	Quantity
A	Housing	1
B	Diffuser	1

Installation


1 Removing the Diffuser

- Hold the Housing (A) of the fixture and rotate the diffuser (B) counterclockwise to remove.

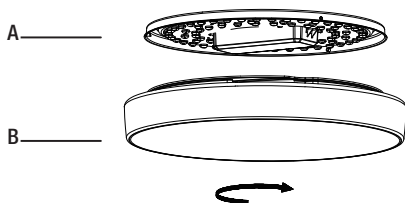


2 Install Mounting Screws

- Install the mounting screws (BB) onto the junction box (not included) and leave a little gap.



3 Connect the Wires


- Connect the black and white wires of the fixture with two wires of the same colors from the junction box. Secure together using wire nuts (AA).
- Connect the grounding wire of the fixture with the one from the junction box. Secure together using a wire nut (AA).



4 Fix the Housing


- Align the keyholes on the housing (A) with the mounting screws (BB). Then rotate the housing (A) to securely fit to the junction box and tighten screws (BB) to secure.

CAUTION: With the small space inside junction box for electrical wiring. Check wiring to make sure it is not cut or damaged which can cause an electrical short.

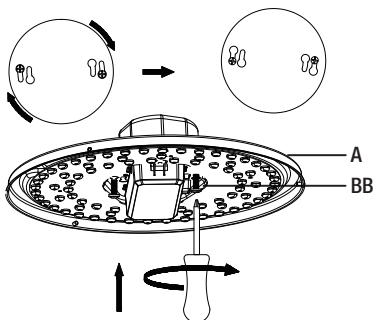

5 Install the Diffuser

- Align the slots on the diffuser (B) with buckle point on the inside of housing (A).
- Turn the diffuser (B) clockwise carefully and confirm it locks into place.

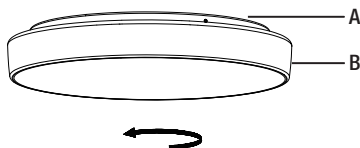

6 Turn on the Light

- Restore power to the junction box.
- Turn the light switch on to activate the fixture.



Operation

1 Download the Hubspace™ app from the App Store or the Google Play Store.



For more information on the Hubspace app, visit hubspace.com/Hubspace.

2 Create an account to sign in or log in if you already have an account.


3 Connect your flush mount to power and follow the instructions on the app screen.



NOTE:

- This Hubspace device requires a 2.4GHz Wi-Fi channel. Hubspace only shows Wi-Fi networks that your device can use.
- If you do not see your Wi-Fi network name when you attempt to connect your devices, please check your router settings or move your product closer to your Wi-Fi router.

4 Tap the '+' button in the upper right corner to add your flush mount.




NOTE: Bluetooth access is required for device setup.

5 Scan the QR Code

- Scan the QR code in the quick start guide or on the flush mount. To scan the QR code on the flush mount, diffuser needs to be removed. Please follow step 1 in the instructions.



OR



NOTE: If the QR code cannot be scanned, you can enter the code manually. Tap Enter Code and follow the instructions.

6 Using Your Smart Flush Mount

- Turn your smart flush mount on or off from the Home page on the Hubspace app.
- To set a schedule or timer, tap the name of the smart flush mount on the Home page. You will see options for setting Schedules and Auto-Off Timers.

7 Set up your Voice Assistant

- You can connect your smart flush mount to Google Home and Alexa from the Hubspace app. Or, you can sign in to Alexa app or Google Home and connect to your Hubspace devices from there.

Care and Cleaning

- Clean the fixture with a soft, dry cloth.
- Do not use any cleaners with chemicals, solvents, or harsh abrasives.



WARNING: Shut off power at the circuit breaker or fuse panel before cleaning the fixture.

Troubleshooting

Problem	Possible Cause	Solution
The fixture will not light.	The power is off.	□ Ensure the power supply is On.
	The circuit breaker is off.	□ Ensure the circuit breaker is in the On position.
	A wire is not properly connected.	□ Check to ensure proper wire connections are made. Contact a qualified electrician.
	The switch is defective.	□ Test the switch or contact a qualified electrician to replace switch.
The fuse blows or the circuit breaker trips when the light is turned on.	The wires are crossed or the power wire is grounding out.	□ Check the wire connections. □ Contact a qualified electrician or call the Customer Service Team at 1-877-592-5233.

Problem	Solution
My Hubspace device is not connecting to Wi-Fi.	Make sure your device is connected to a power source. Your Internet connection or Wi-Fi network may be down.
My device cannot find any Wi-Fi networks.	Make sure you have a 2.4GHz capable Wi-Fi network within range of the device you are trying to add.
My device is in a location that does not have Wi-Fi. Can I still use it with the Hubspace app?	Yes. Use the app on a phone with an Internet connection like LTE. The phone must be within Bluetooth range of your Hubspace device and have Bluetooth enabled.
I cannot find the QR code.	It is on the flush mount housing. A copy of the QR code is also included in your device's documentation.
The QR code has become damaged. How do I add the device?	Under the QR code are numbers. You can enter those in manually instead of scanning the code.
I lost my QR code. How do I add a device?	1. Make sure the device is connected to power. 2. In the Hubspace app, tap +, then Add Device. 3. On the Scan Device screen, tap the Search button in the lower right corner. 4. Follow the onscreen instructions.
The device is on another account. How do I transfer it?	Scan the QR code and it will transfer to your account.
My device is offline for long periods of time.	Make sure your Wi-Fi signal strength is sufficient. You may need to move your router, use mesh Wi-Fi, or Wi-Fi extenders.
The device is on and I scanned the QR code, but the app cannot connect to it.	Turn off Bluetooth on your phone and turn it back on. Then, scan the QR code. If the problem persists, turn your phone off and on, then try again.
Can I scan the same QR code to add multiple products?	No. Each product has a unique QR code.

Compatibility

This lighting fixture is designed to be surface-mounted onto a 3 in./4 in. junction box. Junction box types, sizes, and site conditions vary. Ensure compatibility with the fit, wiring, and mounting. Refer to the information below.

Recommended junction box type	Recommended distance between two keyholes
3 in.	2.75 in. /3.5 in.
4 in.	2.75 in. /3.5 in.



Questions, problems, missing parts? Before returning to the store,
call Commercial Electric Customer Service
8 a.m. - 7 p.m., EST, Monday – Friday
9 a.m. – 6 p.m., EST, Saturday

1-877-592-5233

[HOMEDEPOT.COM/HUBSPACE](https://www.homedepot.com/hubspace)

Retain this manual for future use.