

NITELIGHTER®

Solar Powered LED Landscape Lights

Models: NLS65W2 and NLS65C2

NOTE: This manual is for two different models.

Please ensure you follow the operating instructions for the light that has been purchased.

Read entire manual carefully before installing and keep for future use.

WARNINGS AND SAFETY INSTRUCTIONS

- ⚠ Do not allow children to install or operate the light.
- ⚠ Do not install the light in poor weather conditions, especially when lightning is present.
- ⚠ Ensure the area where the light is being installed is free from obstructions such as underground wiring, rocks and sprinklers.
- ⚠ Ensure the area where the light is being attached is free from wires, plumbing or other obstructions.
- ⚠ If using a ladder, ensure the footing is secure before climbing and obtain assistance when needed.
- ⚠ Wear protective equipment such as safety glasses, dust masks and gloves when installing the light.
- ⚠ Ensure the area where the light is being installed is structurally sound and will support the light.
- ⚠ Do not hang anything from the light.
- ⚠ Do not allow snow, leaves or other objects to rest on top of the light.

Installation (Ground)

WARNING: Ensure the area where the light is being installed is free from obstructions such as underground wiring, rocks and sprinklers.

IMPORTANT: Ensure that the location of where the light will be installed allows for adequate sunlight throughout the day to charge the battery sufficiently. Be mindful of overhangs or shaded areas.

1. Unfold the light and remove any packaging.
2. Remove the ground stake from the light.
3. Place the ground stake in the desired area, ensure the stake is level and press firmly into the ground. Do not use any metal hammer to drive into the ground. If the stake is hitting any obstruction, preventing it from going into the ground, try a new location.
4. Once the stake is firmly in the ground place the light on top of the stake post.
5. Adjust the angle of the solar panel and the light by loosening the knobs on the side of the light.

IMPORTANT: Do not remove the bolt/knob completely. Only loosen to allow for adjustments.

6. Once the light and the panel are at the desired angle, tighten the knob to lock into place.




Installation (Wall)

WARNING: Ensure the area where the light is being attached is free from wires, plumbing or other obstructions.

WARNING: If using a ladder, ensure the footing is secure before climbing and obtain assistance when needed.

IMPORTANT: Ensure that the location of where the light will be installed allows for adequate sunlight throughout the day to charge the battery sufficiently. Be mindful of overhangs or shaded areas.

IMPORTANT: Prior to wall mounting the light, hold the light at various heights and ensure it covers the area that is desired to be illuminated. The diagram below shows generally where the center of the light will hit the ground at various heights.

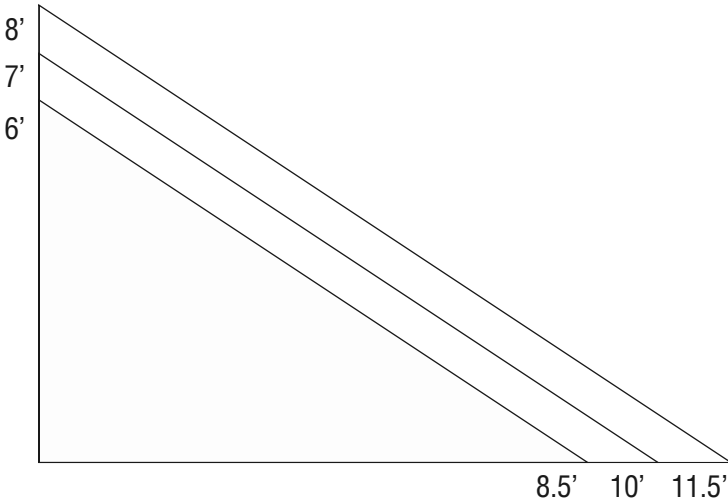

1. Hold the light in position and ensure the light is level.



2. Mark the hole positions and again check to ensure the light is level.



3. Pre-drill the marked location of the holes.

WARNING: Prior to drilling, ensure the area where the light is being attached is free from wires, plumbing or other obstructions.



4. Using a long Phillips Head screwdriver, secure the light in place with the provided screws.



5. Adjust the light and the solar panel to maximize light exposure to the panel and angle of the light to the desired area.




Operating the Light

The light is equipped with a daylight sensor, meaning that the light will charge during the day and when it gets dark, the light will come on automatically. When using the first time, it is recommended to turn the light on when it starts to get dark, so that final adjustments can be made to obtain the desired lighting results. When the light is placed in the ON position, every night the light will come on and remain illuminated for 8-10 hours (dusk to dawn).

NLS65W2 – White Light Only

1. Once the light is installed, press and release the button on the back of the solar panel. The light will flash briefly indicating that it is on.
2. If it is dark enough, the light will stay illuminated which allows for any final positioning to obtain the desired lighting result.
3. If the button is pressed and released a second time, the light will remain in the OFF position.

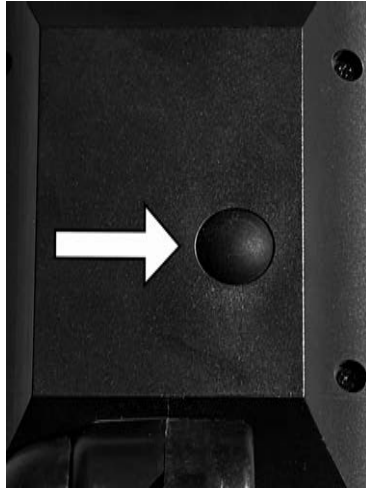

NLS65C2 – Automatic Color Change and White Light

1. Once the light is installed, press and release the button on the back of the solar panel. The light will flash briefly indicating that it is on.
2. If it is dark enough, the light will stay illuminated which allows for any final positioning to obtain the desired lighting result.
3. For a white light, press and release the button once.
4. For an automatic color changing light, press and release the button a second time.
5. If the button is pressed and released a third time, it will remain in the OFF position.

Warranty

SPQ warrants the light to be free from manufacturer defects. Inspect thoroughly before installation and install the light with care. Defects that occur due to improper installation, environmental conditions, Acts of God or improper handling is not covered by this warranty. Any modifications to the light will void the warranty. This warranty is only valid within the Continental US and Canada.

This limited warranty is provided only to the original owner from the date of purchase for a length of 1 year. This warranty is nontransferable and requires a copy of the receipt showing the date of purchase at the time the claim is filed.

This warranty is the only warranty provided to the end use, no other warranties provided by the seller of the product will be honored by SPQ Brands. SPQ Brands will replace or repair the product with new or refurbished items at their discretion. SPQ Brands' maximum liability is limited to the purchased price of the product. SPQ Brands will not be liable for any damage to person or property of any nature resulting from the sale, installation or use of this product.

Contact SPQ Brands for additional assistance: 609-212-0221, M-F, 9am - 5pm, EST.